

# AAMD-LG38-YZ002, AAMD-LL38-XYx02

## Mini High-Brightness SMT Oval Lamps

---

### Overview

The Broadcom<sup>®</sup> AAMD-Lx38 series is a mini version of the AEMD-Lx3K series. The smaller package size enables designs of displays with a tighter pitch. These LEDs are essentially like conventional high-brightness through-hole LEDs in the form of surface-mount devices. They can be assembled using common SMT assembly processes and are compatible with the industrial reflow soldering process.

The LEDs are made with an advanced optical-grade epoxy for superior performance in outdoor sign applications. For easy pick-and-place assembly, the LEDs are packed in tape and reel. Every reel is shipped from a single intensity and color bin for better uniformity.

### Features

- Smaller package size
- Available in AlInGaP red and amber
- Typical viewing angle:
  - Red: 100° × 50°
  - Amber: 95° × 50°
- Tinted diffused
- JEDEC MSL 3


### Applications

- Gas price signs
- Passenger information signs
- Bus destination signs

**CAUTION!** This LED is ESD sensitive. Observe appropriate precautions during handling and processing. Refer to Application Note 1142 for additional details.

The LED must be kept in a moisture barrier bag with <5% relative humidity (RH) when not in use because prolonged exposure to the environment might cause the leads to tarnish or rust, which might cause difficulties in soldering.

Figure 1: Package Drawing

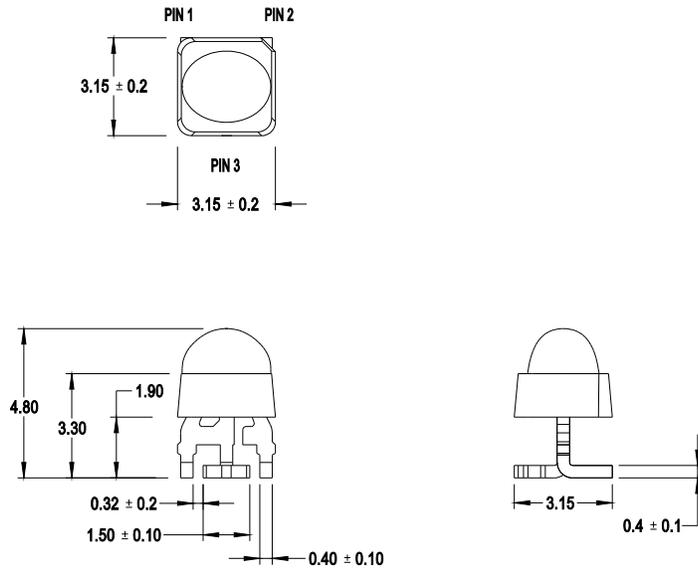

Lead Configuration	
Pin 1	Anode
Pin 2	Cathode
Pin 3	Anode

**NOTE:**

1. All dimensions are in millimeters (mm).
2. Tolerance is  $\pm 0.50$  mm unless otherwise specified.

## Device Selection Guide ( $T_J = 25^\circ\text{C}$ , $I_F = 20\text{ mA}$ )

Part Number	Color	Luminous Intensity, $I_V$ (mcd) <sup>a, b</sup>		Dominant Wavelength $\lambda_d$ (nm) <sup>c</sup>	
		Min.	Max.	Min.	Max.
AAMD-LG38-YZ002	Red	1990	2900	618.0	630.0
AAMD-LL38-XY002	Amber	1660	2400	584.5	594.5
AAMD-LL38-XYK02	Amber	1660	2400	587.0	592.0
AAMD-LL38-XYL02	Amber	1660	2400	589.5	594.5

- a. The luminous intensity,  $I_V$ , is measured at the mechanical axis of the package and it is tested with a single current pulse condition. The actual peak of the spatial radiation pattern may not be aligned with the axis.
- b. Tolerance is  $\pm 15\%$ .
- c. The dominant wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the perceived color of the device.

## Absolute Maximum Ratings

Parameters	Red/ Amber	Unit
DC Forward Current <sup>a</sup>	50	mA
Peak Forward Current <sup>b</sup>	100	mA
Power Dissipation	120	mW
Reverse Voltage	Not recommended for reverse bias operation	
LED Junction Temperature	110	$^\circ\text{C}$
Operating Temperature Range	-40 to +85	$^\circ\text{C}$
Storage Temperature Range	-40 to +100	$^\circ\text{C}$

- a. Derate linearly as shown in [Figure 10](#).
- b. Duty factor = 10%, frequency = 1 kHz,  $T_A = 25^\circ\text{C}$ .

## Optical and Electrical Characteristics ( $T_J = 25^\circ\text{C}$ )

Parameters	Min.	Typ.	Max.	Unit	Test Condition
Viewing Angle, $2\theta_{1/2}$ <sup>a</sup>				°	$I_F = 20\text{ mA}$
Red	—	100 × 50	—		
Amber	—	95 × 50	—		
Dominant Wavelength, $\lambda_d$ <sup>b</sup>				nm	$I_F = 20\text{ mA}$
Red	618.0	623.0	630.0		
Amber	584.5	590.0	594.5		
Peak Wavelength, $\lambda_p$				nm	$I_F = 20\text{ mA}$
Red	—	629.0	—		
Amber	—	593.0	—		
Forward Voltage, $V_F$ <sup>c</sup>				V	$I_F = 20\text{ mA}$
Red	1.8	2.2	2.4		
Amber	1.8	2.1	2.4		
Reverse Voltage, $V_R$ <sup>d</sup>	5	—	—	V	$I_R = 100\ \mu\text{A}$
Thermal Resistance, $R_{\theta J-P}$ <sup>e</sup>	—	270	—	°C/W	LED junction to pin

a.  $\theta_{1/2}$  is the off-axis angle where the luminous intensity is  $1/2$  the peak intensity.

b. The dominant wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the perceived color of the device.

c. Forward voltage tolerance is  $\pm 0.1\text{V}$ .

d. Indicates product final test condition. Long-term reverse bias is not recommended.

e. Thermal resistance from LED junction to pin.

## Part Numbering System

A A M D - L x<sub>1</sub> 3 8 - x<sub>2</sub> x<sub>3</sub> x<sub>4</sub> x<sub>5</sub> x<sub>6</sub>

Code	Description	Option	
x <sub>1</sub>	Color	G	Red
		L	Amber
x <sub>2</sub>	Minimum intensity bin	Refer to the selection guide.	
x <sub>3</sub>	Maximum intensity bin	Refer to the selection guide.	
x <sub>4</sub>	Color bin option	0	Full distribution
		K	Color bins 2 and 4
		L	Color bins 4 and 6
x <sub>5</sub> , x <sub>6</sub>	Packaging option	02	Test current = 20 mA

## Part Number Example

AAMD-LL38-XYL02

x<sub>1</sub> : L - Amber color  
 x<sub>2</sub> : X - Minimum intensity bin X  
 x<sub>3</sub> : Y - Maximum intensity bin Y  
 x<sub>4</sub> : L - Color bins 4 and 6  
 x<sub>5</sub>, x<sub>6</sub> : 02 - Tested at 20 mA

## Bin Information

### Intensity Bin Limits (CAT)

Bin ID	Luminous Intensity, $I_V$ (mcd)	
	Min.	Max.
X	1660	1990
Y	1990	2400
Z	2400	2900

Tolerance =  $\pm 15\%$ 

### Forward Voltage Bin Limits (VF)

Bin ID	Forward Voltage, $V_F$ (V)	
	Min.	Max.
VD	1.8	2.0
VA	2.0	2.2
VB	2.2	2.4

Tolerance =  $\pm 0.1V$ 

### Color Bin Limits (BIN)

#### Red

Bin ID	Dominant Wavelength, $\lambda_d$ (nm)	
	Min.	Max.
—	618.0	630.0

Tolerance =  $\pm 1.0$  nm

#### Amber

Bin ID	Dominant Wavelength, $\lambda_d$ (nm)	
	Min.	Max.
1	584.5	587.0
2	587.0	589.5
4	589.5	592.0
6	592.0	594.5

Example of bin information on reel and packaging label:

CAT : X – Intensity bin X

Bin : 4 – Color bin 4

Figure 2: Spectral Power Distribution

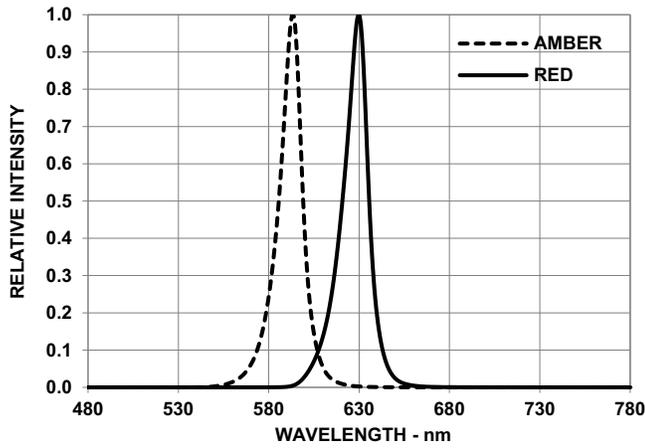


Figure 3: Forward Current vs. Forward Voltage

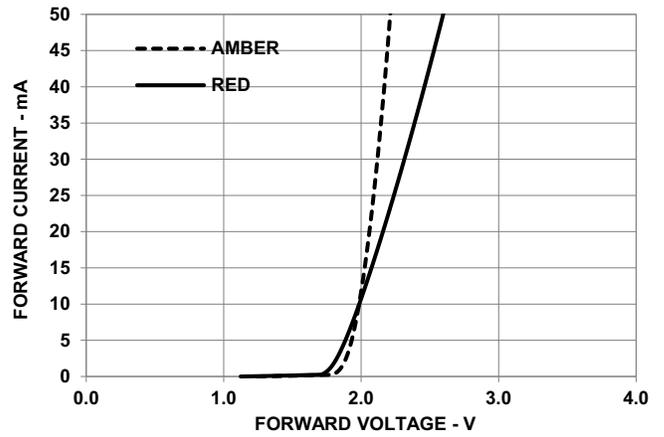


Figure 4: Relative Luminous Intensity vs. Mono Pulse Current

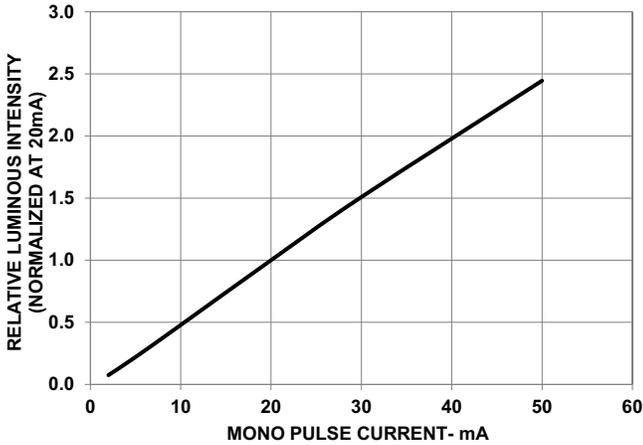


Figure 5: Dominant Wavelength Shift vs. Mono Pulse Current

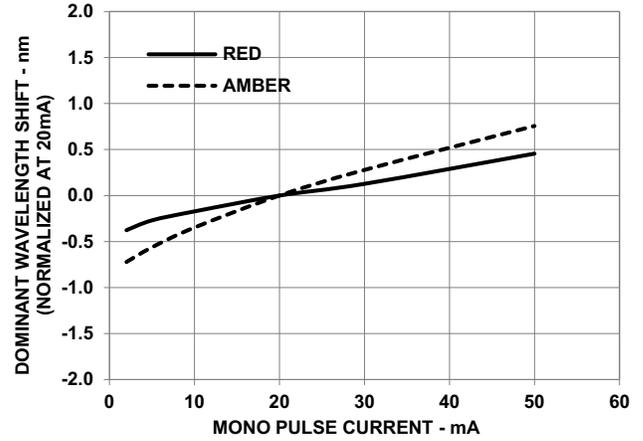


Figure 6: Relative Light Output vs. Junction Temperature

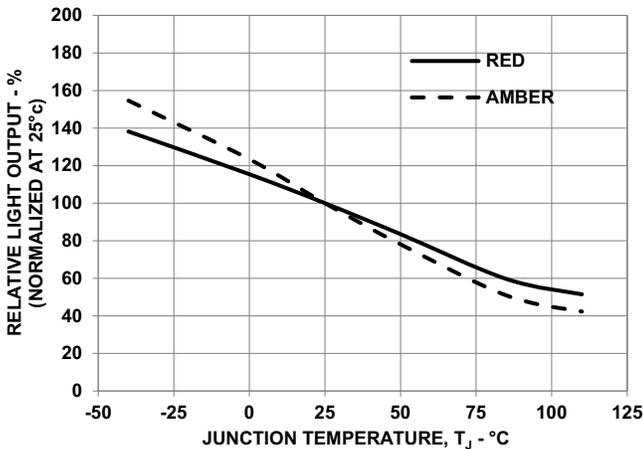


Figure 7: Forward Voltage Shift vs. Junction Temperature

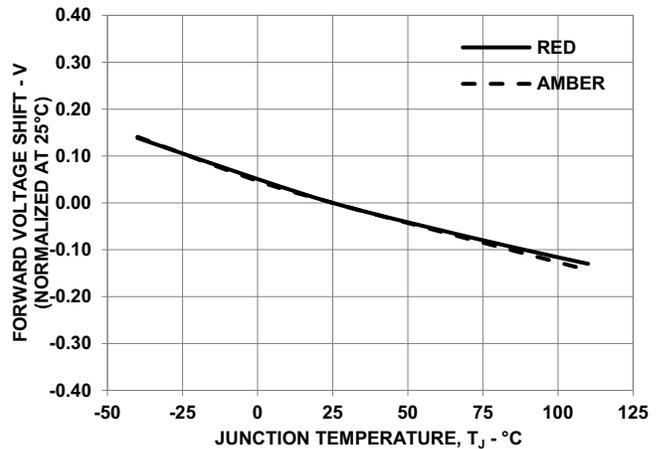


Figure 8: Radiation Pattern (Red)

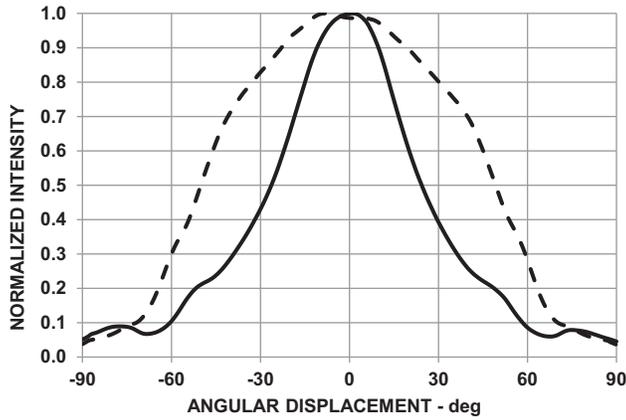


Figure 9: Radiation Pattern (Amber)

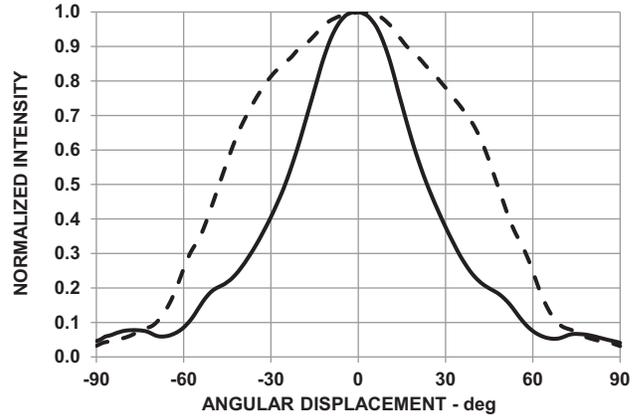


Figure 10: Maximum Forward Current vs. Ambient Temperature. Derate based on  $T_{J\ MAX} = 110^{\circ}C$


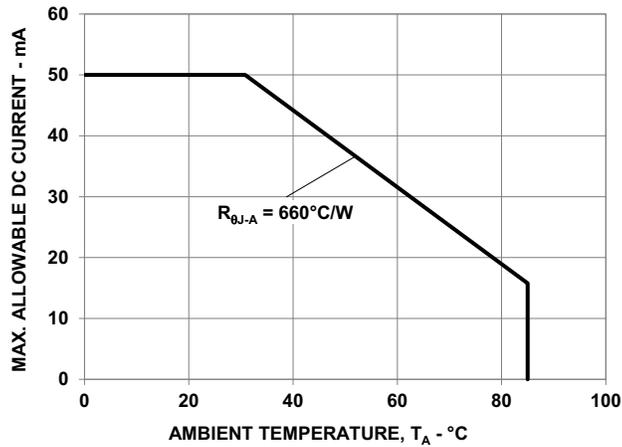



Figure 11: Recommended Soldering Land Pattern

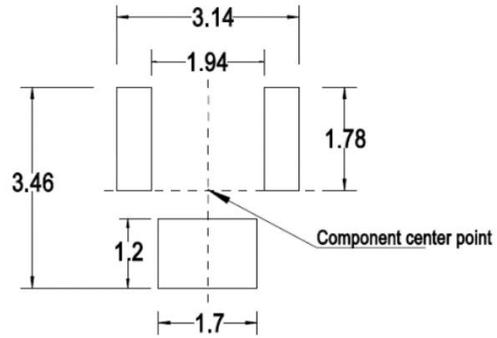

**NOTE:**

1. All dimensions are in millimeters (mm).
2. Recommended stencil thickness is minimum 0.15 mm (6 mil).


Figure 12: Carrier Tape Dimensions

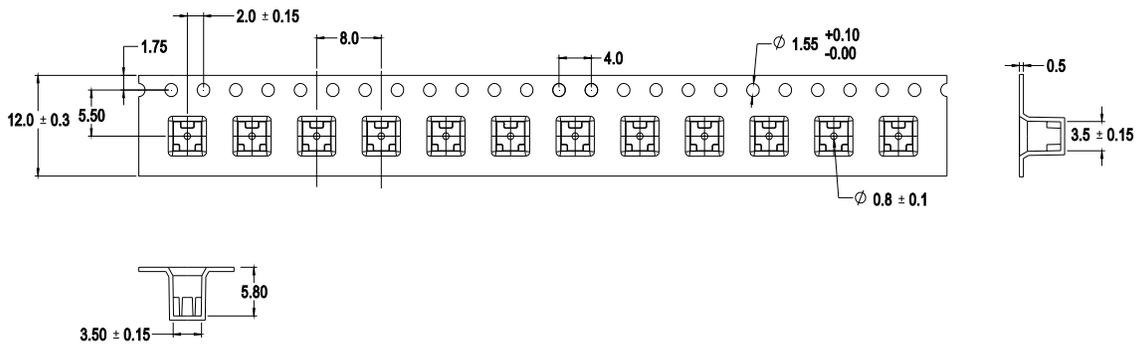

**NOTE:**

1. All dimensions are in millimeters (mm).
2. Tolerance is  $\pm 0.10$  mm unless otherwise specified.
3. Quantity per reel: 1200 pieces.

Figure 13: Reel Dimensions

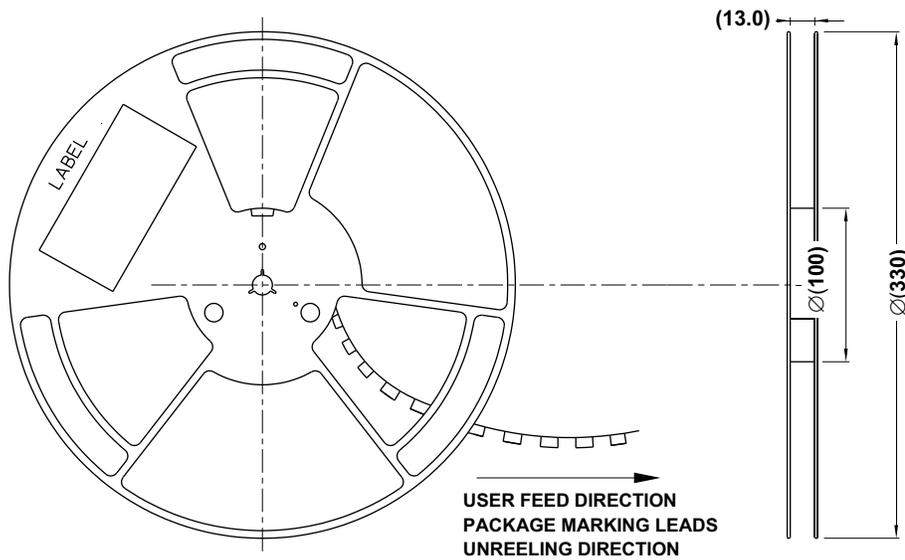

**NOTE:**


1. All dimensions are in millimeters (mm).
2. The dimensions in brackets are for reference only.

## Precautionary Notes

### Soldering

- Do not perform reflow soldering more than twice. Observe necessary precautions of handling moisture-sensitive device as stated in the following section.
- Do not apply any pressure or force on the LED during reflow and after reflow when the LED is still hot.
- Use reflow soldering to solder the LED. Use hand soldering only for rework if unavoidable, but it must be strictly controlled to following conditions:
  - Soldering iron tip temperature = 315°C maximum
  - Soldering duration = 3 seconds maximum
  - Number of cycles = 1 only
  - Power of soldering iron = 50W maximum
- Do not touch the LED package body with the soldering iron except for the soldering terminals, because it may cause damage to the LED.
- Confirm beforehand whether the functionality and performance of the LED are affected by soldering with hand soldering.


Figure 14: Recommended Lead-Free Reflow Soldering Profile

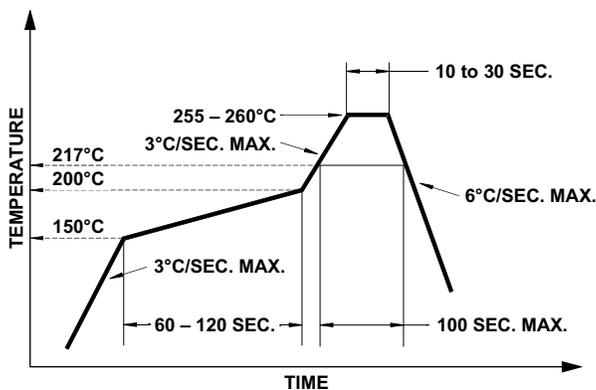

### Handling Precautions

For automated pick and place, Broadcom has tested following nozzle size to work with this LED. However, due to the possibility of variations in other parameters such as pick-and-place machine maker/model, and other settings of the machine, verify that the selected nozzle performs as per requirements.

Figure 15: Recommended Nozzle Dimension

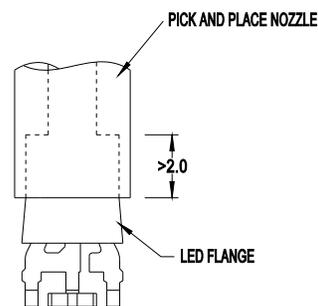

#### NOTE:

1. The nozzle tip must touch the LED flange during pick and place.
2. The outer dimensions of the nozzle tip must be able to fit into the carrier tape pocket until it touches the LED flange.
3. All dimensions are in millimeters (mm).

## Handling Moisture-Sensitive Devices

This product has a Moisture Sensitive Level 3 rating per JEDEC J-STD-020. For additional details and a review of proper handling procedures, refer to Broadcom Application Note 5305, *Handling Moisture-Sensitive Surface-Mount LEDs*.

- Before use:
  - An unopened moisture barrier bag (MBB) can be stored at <math>40^{\circ}\text{C}/90\% \text{RH}</math> for 12 months. If the actual shelf life has exceeded 12 months and the Humidity Indicator Card (HIC) indicates that baking is not required, then it is safe to reflow the LEDs per the original MSL rating.
  - Do not open the MBB prior to assembly (for example, for IQC). If unavoidable, the MBB must be properly resealed with fresh desiccant and HIC. The exposed duration must be taken in as floor life.
- Control after opening the MBB:
  - Read the HIC immediately upon opening the MBB.
  - Keep the LEDs at <math>30^{\circ}/60\% \text{RH}</math> at all times, and complete all high temperature-related processes, including soldering, curing or rework within 168 hours.
- Control for unfinished reel:
 

Store unused LEDs in a sealed MBB with desiccant or a desiccator at <math>5\% \text{RH}</math>.
- Control of assembled boards:
 

If the PCB soldered with the LEDs is to be subjected to other high-temperature processes, store the PCB in a sealed MBB with desiccant or desiccator at <math>5\% \text{RH}</math> to ensure that all LEDs have not exceeded their floor life of 168 hours.
- Baking is required if any of these conditions exist:
  - The HIC indicates a change in color for 10% and 5%, as stated on the HIC.
  - The LEDs are exposed to conditions of <math>30^{\circ}\text{C}/60\% \text{RH}</math> at any time.
  - The LED's floor life exceeded 168 hours.

The recommended baking condition is: <math>60 \pm 5^{\circ}\text{C}</math> for 20 hours.

Baking can only be done once.
- Storage:
 

The soldering terminals of these Broadcom LEDs are silver plated. If the LEDs are exposed in ambient environment for too long, the silver plating might be oxidized, thus affecting its solderability performance. As such, keep unused LEDs in a sealed MBB with desiccant or in a desiccator at <math>5\% \text{RH}</math>.

## Application Precautions

- The drive current of the LED must not exceed the maximum allowable limit across temperature as stated in this data sheet. Constant current driving is recommended to ensure consistent performance.
- Circuit design must cater to the whole range of forward voltage ( $V_F$ ) of the LEDs to ensure the intended drive current can always be achieved.
- The LED exhibits slightly different characteristics at different drive currents, which may result in a larger variation of performance (meaning intensity, wavelength, and forward voltage). Set the application current as close as possible to the test current to minimize these variations.
- The LED is not intended for reverse bias. Use other appropriate components for such purposes. When driving the LED in matrix form, ensure that the reverse bias voltage does not exceed the allowable limit of the LED.
- Avoid rapid changes in ambient temperature, especially in high-humidity environments, because they cause condensation on the LED.
- If the LED is intended to be used in harsh or outdoor environments, protect the LED against damages caused by rainwater, dust, oil, corrosive gases, external mechanical stresses, and so on.

## Thermal Management

The optical, electrical, and reliability characteristics of the LED are affected by temperature. Keep the junction temperature ( $T_J$ ) of the LED below the allowable limit at all times.  $T_J$  can be calculated as follows:

$$T_J = T_A + R_{\theta J-A} \times I_F \times V_{Fmax}$$

where:

$T_A$  = ambient temperature ( $^{\circ}\text{C}$ )

$R_{\theta J-A}$  = thermal resistance from LED junction to ambient ( $^{\circ}\text{C/W}$ )

$I_F$  = forward current (A)

$V_{Fmax}$  = maximum forward voltage (V)

The complication of using this formula lies in  $T_A$  and  $R_{\theta J-A}$ . Actual  $T_A$  is sometimes subjective and hard to determine.  $R_{\theta J-A}$  varies from system to system depending on design and is usually not known.

Another way of calculating  $T_J$  is by using the solder point temperature ( $T_S$ ) as follows:

$$T_J = T_S + R_{\theta J-S} \times I_F \times V_{Fmax}$$

where:


$T_S$  = LED solder point temperature as shown in the following figure ( $^{\circ}\text{C}$ )

$R_{\theta J-S}$  = thermal resistance from junction to solder point ( $^{\circ}\text{C/W}$ )

$I_F$  = forward current (A)

$V_{Fmax}$  = maximum forward voltage (V)

**Figure 16: Solder Point Temperature on PCB**



$T_S$  can be easily measured by mounting a thermocouple on the soldering joint as shown in preceding figure, while  $R_{\theta J-S}$  is provided in this data sheet. Verify the  $T_S$  of the LED in the final product to ensure that the LEDs are operating within all maximum ratings stated in this data sheet.

## Eye Safety Precautions

LEDs may pose optical hazards when in operation. Do not look directly at operating LEDs because it might be harmful to the eyes. For safety reasons, use appropriate shielding or personal protective equipment.

## Disclaimer

Broadcom's products and software are not specifically designed, manufactured, or authorized for sale as parts, components, or assemblies for the planning, construction, maintenance, or direct operation of a nuclear facility or for use in medical devices or applications. The customer is solely responsible, and waives all rights to make claims against Broadcom or its suppliers, for all loss, damage, expense, or liability in connection with such use.

Copyright © 2025 Broadcom. All Rights Reserved. The term "Broadcom" refers to Broadcom Inc. and/or its subsidiaries. For more information, go to [www.broadcom.com](http://www.broadcom.com). All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.



Lead (Pb) Free  
RoHS Compliant