


## Actuator

704.294.0

Distribution by Rs-online



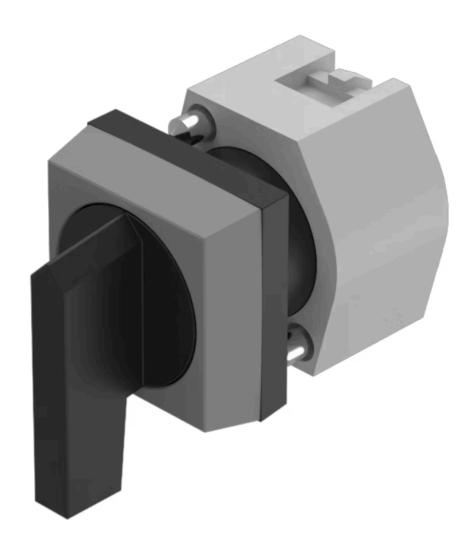



### Your product:



# 704.294.0 Actuator

| FRONT                      |   |
|----------------------------|---|
| Front dimension:           | 30 mm x 30 mm   |
| Front form:                | Square  |
| Front bezel colour:        | Grey  |
| Front bezel material:      | Plastic   |
|                            |   |
| MOUNTING                   |   |
| Design:                    | Raised  |
| Mounting type:             | Panel mounting  |
|                            |   |
| OPERATING-/INDICATION PART |   |
| Lever colour:              | Black   |
| Lever bar colour:          | Black   |
| Lever material:            | plastic   |
| Lever shape:               | long  |
|                            |   |
| ELECTRICAL CHARACTERISTICS |   |
| Standards:                 | The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1 |
| MEQUANIQAL QUAD TERROTIO   |   |
| MECHANICAL CHARATERISTIC   |   |

**Switching action:** Momentary - Rest - Momentary

**Switching positions:** 3 positions

**Switching angle:** 42° left / 42° right

**Mechanical lifetime:** ≤2.5 Mil. cycles of operation

Weight: 0.034 kg

#### **AMBIENT CONDITION**

**IP Protection:** IP65 front side

**Operating temperature:**  $-40 \, ^{\circ}\text{C} \, ... + 55 \, ^{\circ}\text{C}$ 

Storage temperature:  $-40 \, ^{\circ}\text{C} \dots + 85 \, ^{\circ}\text{C}$ 

#### **CERTIFICATE**

**REACH:** REACH compliant

RoHS: RoHS compliant

#### **OTHER**

**Short Description:** Actuator, 30 mm x 30 mm, non illuminative, Black, long, Square, Grey, Plastic,

Momentary - Rest - Momentary


Hints: Max. 3 switching elements can be clipped on

max. number of switching

elements:


3

**Switching positions:** 



Wiring diagrams:


Mounting cut-outs:



A = Screw terminal

B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

### Dimension drawings:



A = Screw terminal