



HDcctv
Digital Video Camera
OPERATION MANUAL



Thank you for choosing our high quality camera. Before attempting to connect or operate, please read and follow these instructions.

MOUNTING POSITION



CAUTION !
Please start installing in the order shown.

CAUTIONS



**Correct Disposal of This Product
(Waste Electrical & Electronic Equipment)**


(Applicable in the European Union and other European countries with separate collection systems)


This marking shown on the product or its literature, indicate that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

This product should not be mixed with other commercial wastes purchased this product, or their local government office, for details of where and how they can take item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract.
Household users should contact either the retailer where they for disposal.



 This symbol is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

 This symbol is intended to alert the user to the presence of important operating and maintenance(servicing) instruction in the literature accompanying the appliance.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions;

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Note -

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

WARNING -

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.


Caution -

Any changes or modifications in construction of this devices which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

CAUTION


1. A regulated DC12V 300mA power supply is recommended for use with this camera for the best picture and the most stable operation. **An unregulated power supply can cause damage to the camera. When unregulated power supply is applied, product warranty will be out of subject.**
2. It is recommended that the camera is used with a monitor that has a CCTV quality 75 video impedance level. If your monitor is switched to high impedance then please adjust accordingly.
3. Do not attempt to disassemble the camera to gain access to the internal componets. Refer servicing to your dealer.
4. Never face the camera towards the sun or any bright or reflective light, which may cause smear on the picture and possible damage to the CCD.
5. **Do not remove the serial sticker for the warranty service.**
6. Do not expose the camera to rain or other types of liquid.
7. The apparatus must be connected to a mains socket-outlet with a protective earthing connection.

CONNECTION

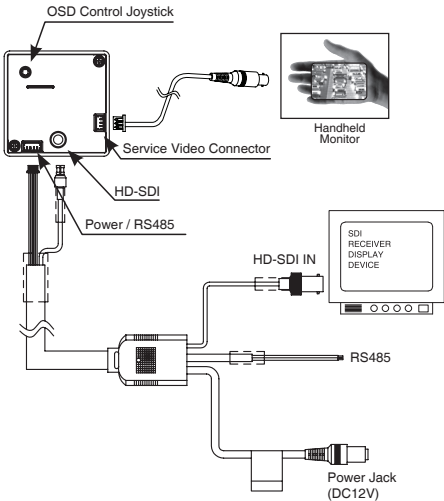




DIMENSIONS

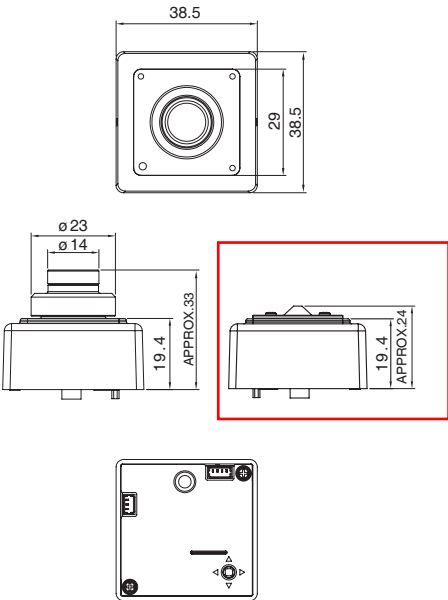Unit: mm



EQUIPMENT AND ACCESSORIES

Camera		
Mounting Bracket		
Screw	Machine Screw M2x2.5(4ea)	Tapping Screw ø3 x 8(2ea)
Operation Manual		
Cable	Service Video Output Test Cable	DIY Cable
CAUTION <ul style="list-style-type: none">• When you connect Service Video Output Cable WDR function does not work.• Service Video Output looks the angle of view narrower than HD-SDI Output.		

SPECIFICATION

Image Device	1/3" 2.1 Mega Pixel SONY CMOS
Pixel Size	2.8um(H) x 2.8um(V)
Effective Pixels	1984(H) x 1105(V)
Manual Shutter	1/30(25), 1/60(50), 1/120(100), 1/250, 1/700, 1/1K, 1/1.6K, 1/2.5K, 1/5K, 1/7K, 1/10K, 1/30K
Sense-up	x 2, x 3, x 4
AGC	0dB ~ 23dB
White Balance	AUTO / Manual / PUSH LOCK
Sensitivity	0.1 Lux
S/N Ratio	More than 50dB
Video Output	HD-SDI / CVBS
Day & Night	Digital D&N (AUTO / COLOR / BW)
LENS	Board Lens, Pinhole Lens
Dimension	38.5mm(H) x 38.5mm(V)
Weight	Approx. 80g
ETC.	Motion Detection, 3DNR, Mirror(H,V,H/V), Digital Zoom, BLC, WDR, OSD(JOYSTICK)
Power Consumption	DC12V[±10%], MAX 160mA
Operating Temperature	14°F~122°F (-10°C~+50°C)
Storage Temperature	-4°F~140°F (-20°C~+60°C)
External Control	RS-485

Specifications and designs are subject to change for improving the functionality of this product without notice.

OSD FUNCTION DESCRIPTION

1. EXPOSURE

- BRIGHTNESS:
Enable user to control the image brightness (0~20steps).

- SHUTTER MODE:
Enable user to set up the Shutter Mode.
-> AUTO, MANUAL

- SHUTTER SPEED:
Enable user to set up the Shutter Speed.
-> 1/30(25), 1/60(50), 1/120(100), 1/250, 1/700, 1/1K, 1/1.6K, 1/2.5K, 1/5K, 1/7K, 1/10K, 1/30K.
*() is for power-frequency 50Hz.

- DSS(Digital Slow Shutter):
Enable user to set up the DSS Level. -> OFF, X2, X3, X4.

- AGC MAX:
Enable user to make imager bright to amplify the Gain (0~23dB).

- INITIAL: Enable user to initialize the Exposure menu set up.

EXPOSURE

> BRIGHTNESS 14
SHUTTER MODE AUTO
SHUTTER SPEED OFF
DSS OFF
AGC MAX 23dB
INITIAL RETURN

2. WHITE BALANCE

Enable user to represent the accurate white color by controlling the R,G,B level.

- WB MODE

1. AUTO : Enable user to trace the White Balance automatically in the range of 2,300K~10,000K.

2. PUSH LOCK : Enable user to fix the White Balance according to the color temperature in the certain environment.

3. MANUAL : Enable user to sets the White Balance according to the circumstance.

- CHROMA: Enable user to set the Color Gain(0~20steps).

- KELVIN: In the MANUAL setting of WB MODE, enable user to set the color temperature range.

- RED GAIN: In the MANUAL setting of WB MODE, enable user to set the RED GAIN.

WHITE BALANCE

> WB MODE AUTO
CHROMA 7
KELVIN ---
RED GAIN ---
BLUE GAIN ---
PUSH AUTO ---
INITIAL RETURN

4. Enable user to finish words choice and position by using LEFT, RIGHT KEY in RETURN

[TITLE LOCATION]

TITLE SET

[U] ↑ [D] ↓ [L]← [R]→ [M] +

- **LANGUAGE:** Enable user to set up an OSD language
-> ENGLISH, RUSSIAN, SPANISH, GERMAN, FRENCH, PORTUGUESE.

- COMM ADJUST: Enable user to set up CAMERA ID, BAUDRATE.

1. CAM ID: Enable user to set up Camera ID (1~255).

2. BAUDRATE: A communication speed to communicate with external device. (2400, 4800, 9600, 19200, 38400, 57600, 115200)

3. APPLY: Enable user to setting of Communication

COMM ADJUST

> CAM ID 1
BAUDRATE 2400BPS
APPLY 1
RETURN

- PRIVACY: Privacy is the function that covers the some part on screen to prevent private life.
(Maximum 30 point covered)

1. ZONE NO : Enable user to set up a position from 0 to 29 area.

2. MASK MODE: Enable user to set up screen output of chosen position.

3. X-POSITION : Mask Horizontal start position.

4. Y-POSITION : Mask Vertical start position.

5. X-SIZE : Mask Horizontal width.

6. Y-SIZE : Mask Vertical height.

7. COLOR : Set the mask color.

8. TRANSPARENCY : Set the transparency of the mask.

9. INITIAL : Enable user to initialize setting of PRIVACY MENU.

PRIVACY

> ZONE NO 0
MASK MODE ON
X-POSITION 12
Y-POSITION 2
X-SIZE 2
Y-SIZE 3
COLOR CYN
TRANSPARENCY 0%
INITIAL RETURN

- **BLUE GAIN:** In the MANUAL setting of WB MODE, enable user to set the BLUE GAIN.

- **PUSH AUTO:** In the PUSH LOCK setting of WB MODE, enable user to fix the White Balance in camera setting.

- **INITIAL:** Enable user to reset the WHITE BALANCE menu setting.

3. WDR/BLC

- MODE:
Enable user to set WDR/BLC mode. -> OFF, WDR, BLC

1. WDR(Wide Dynamic Range):
Use the condition which Image doesn't figure out with BLC such as place surrounded windows and lobby.
(*The screen display may be unnatural)

2. BLC(Backlight compensation mode):
This function works for subjects in the kind of backlight conditions.

- **WDR LEVEL:** Enable user to set up WDR Level(0~4 level).

- **BLC OSD:** Enable user to set up screen output of chosen BLC zone.

- **BLC X-POSITION:** Enable user to set up Horizontal start position(0~20steps).

- **BLC Y-POSITION:** Enable user to set up Vertical start position(0~20steps).

- **BLC X-SIZE:** Enable user to set up Horizontal size(0~20steps).

- **BLC Y-SIZE:** Enable user to set up Vertical size(0~20steps).

- **INITIAL:** Enable user to initialize the WDR/BLC setting.

WDR / BLC

> MODE WDR
WDR LEVEL 4 ON
BLC OSD 6
BLC X - POSITION 4
BLC Y - POSITION 7
BLC X - SIZE 10
BLC Y - SIZE 10
INITIAL RETURN

4. DAY&NIGHT

: Conversion of output image COLOR / BW depending on exterior environment.

- MOTION: Motion detection function.

1. RESOLUTION: Enable user to set up resolution

2. SENSITIVITY: Enable user to set up sensitivity.

3. WINDOW USE: Enable user to select to motion area.

4. WINDOW TONE : Enable user to area window tone.

5. X-POSITION : Window Horizontal start position.

6. Y-POSITION : Window Vertical start position.

7. X-SIZE : Window Horizontal width.

8. Y-SIZE : Window Vertical height.

9. INITIAL : Enable user to initialize setting of MOTION DETECT.

MOTION

> RESOLUTION 0
SENSITIVITY 10
WINDOW USE ON
WINDOW TONE 1
X-POSITION 11
Y-POSITION 3
X-SIZE 39
Y-SIZE 28
INITIAL

- DISPLAY :
Enable user to set up a screen marking of CAM ID, CAM TITLE, MOTION, DZOOM.

1. CAM ID: Enable user to set up ID for RS485.

2. CAM TITLE: Enable user to set up output in fixed CAM TITLE.

3. MOTION: Enable user to set up out put of MOTION on the screen as MOTION ON setting.

4. DZOOM: Enable user to set up output DZOOM ratio.

5. INITIAL: Enable user to initialize of DISPLAY menu.

DISPLAY

> CAM ID OFF
CAM TITLE OFF
MOTION OFF
DZOOM OFF
INITIAL RETURN

- SYSTEM

1. DEFECT DET: White pixel detection and compensation function.

2. DOUT FORMAT: Enable user to set up digital output format (720p, 1080p).

3. DOUT FPS: Enable user to set up digital output frame rate.

4. FREQ: Enable user to set up power-frequency(50Hz, 60Hz).

5. CVBS: Enable user to set up CVBS type NTSC or PAL.

6. APPLY: Enable user to setting of SYSTEM.

SYSTEM

> DEFECT DET []
DOUT FORMAT 1080P
DOUT FPS 30
FREQ 60HZ
CVBS NTSC
APPLY 1
RETURN

- D&N MODE

1. COLOR : Enable user to fit the output image in color.

2. B/W : Enable user to fit the output image in B/W.

3. AUTO : Enable user to convert to COLOR/BW automatically by luminance element on Screen

DAY&NIGHT

> MODE AUTO
DWELL TIME 3s
AGC THRS 10
MARGIN 10
INITIAL RETURN

- **DWELL TIME:**
In D&N MODE AUTO, enable user to set to delay time for changing COLOR/BW(0~10sec).

- **AGC THRS:** The value of switching from Day to Night. In D&N MODE AUTO, enable user to set to AGC THRS level (0~20steps).

- **MARGIN:** To switch from Day to Night margins.

- **INITIAL:** Enable user to initialize the setting in DAY&NIGHT menu.

5. IMAGE

- SHARPNESS: Enable user to control the image sharpness(0~10steps).

- MIRROR: Sets the horizontal flip for the display output.

- FLIP: Sets the Vertical flip for the displayoutput.

- DZOOM(Digital Zoom): Max. 20x Digital Zoom.

IMAGE

> SHARPNESS 4
MIRROR OFF
FLIP OFF
DZOOM 1X
HLMASK OFF
D-WDR OFF
DNR OFF
INITIAL MIDDLE
RETURN

7. FACTORY DEFAULT

: Enable user to reset all of the status as the factory default.

8. EXIT

: After saving the current settings in the OSD menu and exit.

HOT KEY

To quickly switch CVBS type(NTSC or PAL), Push LEFT KEY or RIGHT KEY more than 2secends and push SET KEY.

- **HLMASK:** This function that improves the visual recognition of license plates and other such objects by suppressing or masking strong light sources.

1. HLMASK LEVEL: Enable user to set HLMASK Level(0~20steps).

2. HLMASK COLOR: Set the HLMASK color
(Black, White, Yellow, Cyan, Green, Magenta, Red, Blue).

- **D-WDR:** In this mode, the brightness of a single image is compensated using the gamma curve.

- DNR: This function reduces noise.

- INITIAL: Enable user to initialize the setting on IMAGE menu.

Noise removal effect

Low (Outline of DNR function) High

6. SPECIAL

: Setting up the CAM TITLE, LANGUAGE, PRIVACY, COMM MOTION, DISPLAY, SYSTEM.

- CAM TITLE : Enable user to choose any word in screen.
(Maximum 10 letter is available)

1. A letter Choice from the screen using Menu key.

2. Enable user to move to next menu using LEFT, RIGHT KEY in LOCATION.

3. By using UP, DOWN, LEFT, RIGHT KEY, enable user to choose any letters in LOCATION and then get back to previous step.

SPECIAL

> CAM TITLE ENGLISH
LANGUAGE OFF
PRIVACY OFF
MOTION OFF
DISPLAY OFF
SYSTEM OFF
INITIAL RETURN

CAM TITLE

0123456789ABCDEFGHIJKLMN
OPQRSTUVWXYZ!?"#%<()>{}
SPACE>> <<BACK

TITLE SET

LOCATION RETURN

Pelco “D” Protocol Commands

	BYTE1	BYTE2	BYTE3	BYTE4	BYTE5	BYTE6	BYTE7
TELE	0xFF	CamID	0x00	0x20	0x00	0x00	ChkSum
WIDE	0xFF	CamID	0x00	0x40	0x00	0x00	ChkSum
NEAR	0xFF	CamID	0x01	0x00	0x00	0x00	ChkSum
FAR	0xFF	CamID	0x00	0x00	0x00	0x00	ChkSum
MENU 1	0xFF	CamID	0x00	0x23	0x00	0x5F	ChkSum
MENU 2	0xFF	CamID	0x00	0x03	0x00	0x62	ChkSum
MENU 3	0xFF	CamID	0x00	0x07	0x00	0x5F	ChkSum
MENU 4	0xFF	CamID	0x00	0x07	0x00	0x60	ChkSum

MENU 1 : Pelco Keyboard Menu On / Off [95(=0x5F) + Pattern]
MENU 2 : V/D Keyboard Menu On / Off [Set Preset + 98(=0x62)]
MENU 3.4 : Another Menu On / Off [Go To Preset + 95(=0x5F) or 96(=0x60)]

CamID: 0x00 ~0xFF
ChkSum: The Check Sum is the 8 bit (modulo256) sum of the payload bytes (BYTE2 - BYTE6) in the command.

- TELE = UP KEY
- WIDE = DOWN KEY
- NEAR = LEFT KEY
- FAR = RIGHT KEY
- MENU = SELECT KEY