SIEMENS

SITOP power supply

SITOP PSU100C

Operating Instructions

SITOP PSU100C 12 V/2 A
6EP1321-5BA00
SITOP PSU100C 12 V/6.5 A
6EP1322-5BA10
SITOP PSU100C 24 V/0.6 A
6EP1331-5BA00
SITOP PSU100C 24 V/1.3 A
6EP1331-5BA10
SITOP PSU100C 24 V/2.5 A
6EP1332-5BA00
SITOP PSU100C 24 V/3.7 A
6EP1332-5BA20
SITOP PSU100C 24 V/4 A
6EP1332-5BA10

Overview Safety instructions Description, device design, dimension drawing Mounting/disassembly Mounting position, mounting clearances Installation Technical data Safety, approvals, EMC 8 Ambient conditions **Applications** 10 **Environment** Service & Support

Legal information

Warning notice system

This manual contains notices you have to observe in order to ensure your personal safety, as well as to prevent damage to property. The notices referring to your personal safety are highlighted in the manual by a safety alert symbol, notices referring only to property damage have no safety alert symbol. These notices shown below are graded according to the degree of danger.

M DANGER

indicates that death or severe personal injury will result if proper precautions are not taken.

A WARNING

indicates that death or severe personal injury may result if proper precautions are not taken.

A CAUTION

indicates that minor personal injury can result if proper precautions are not taken.

NOTICE

indicates that property damage can result if proper precautions are not taken.

If more than one degree of danger is present, the warning notice representing the highest degree of danger will be used. A notice warning of injury to persons with a safety alert symbol may also include a warning relating to property damage.

Qualified Personnel

The product/system described in this documentation may be operated only by **personnel qualified** for the specific task in accordance with the relevant documentation, in particular its warning notices and safety instructions. Qualified personnel are those who, based on their training and experience, are capable of identifying risks and avoiding potential hazards when working with these products/systems.

Proper use of Siemens products

Note the following:

▲ WARNING

Siemens products may only be used for the applications described in the catalog and in the relevant technical documentation. If products and components from other manufacturers are used, these must be recommended or approved by Siemens. Proper transport, storage, installation, assembly, commissioning, operation and maintenance are required to ensure that the products operate safely and without any problems. The permissible ambient conditions must be complied with. The information in the relevant documentation must be observed.

Trademarks

All names identified by ® are registered trademarks of Siemens AG. The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.

Disclaimer of Liability

We have reviewed the contents of this publication to ensure consistency with the hardware and software described. Since variance cannot be precluded entirely, we cannot guarantee full consistency. However, the information in this publication is reviewed regularly and any necessary corrections are included in subsequent editions.

Overview



The key benefits of the product include:

- Power supply with wide range input for operation on 1-phase AC line supplies or a DC voltage
- Small mounting footprint as a result of the low-profile design
- Low energy usage as a result of the high efficiency over the complete load range
- Minimum energy losses for no-load operation (<0.75 W)
- Can be snapped onto and removed from mounting rails without requiring any tools
- Connection using plug-in terminals
- Wide operating temperature range from -20 °C up to +70 °C (derating from +50 °C / 55 °C)
- International package of standards

Ordering data

The following device options are available:

| SITOP PSU100C primary-clocked power supply | | |
|--|---------------|--|
| Туре | Order number | |
| Input 100 - 230 V AC 120 - 230 V DC | 6EP1321-5BA00 | |
| Output 12 V DC / 2 A | | |
| Input 100 - 230 V AC 120 - 230 V DC | 6EP1322-5BA10 | |
| Output 12 V DC / 6.5 A | | |
| Input 100 - 230 V AC 120 - 230 V DC | 6EP1331-5BA00 | |
| Output 24 V DC / 0.6 A | | |
| Input 100 - 230 V AC 120 - 230 V DC | 6EP1331-5BA10 | |
| Output 24 V DC / 1.3 A | | |
| Input 100 - 230 V AC 120 - 230 V DC | 6EP1332-5BA00 | |
| Output 24 V DC / 2.5 A | | |
| Input 100 - 230 V AC 120 - 230 V DC | 6EP1332-5BA20 | |
| Output 24 V DC / 3.7 A | | |
| Input 100 - 230 V AC 120 - 230 V DC | 6EP1332-5BA10 | |
| Output 24 V DC / 4 A | | |

| Accessories | |
|----------------------------------|---|
| Туре | Order number |
| Pluggable spring-loaded terminal | 6EP1971-5BA00 (packing unit): 100 terminals, for 50 SITOP PSU100C power supplies) |

Table of contents

| | Overv | riew | 3 |
|---|---------|---|----|
| 1 | Safety | y instructions | 7 |
| 2 | Descr | ription, device design, dimension drawing | 9 |
| | 2.1 | Device description | g |
| | 2.2 | Connections and terminal designation | 10 |
| | 2.3 | Potentiometer | 11 |
| | 2.4 | Operating displays and signaling | 12 |
| | 2.5 | Block diagram | 13 |
| | 2.6 | Dimensions and weight | 14 |
| 3 | Moun | ting/disassembly | 17 |
| 4 | Moun | ting position, mounting clearances | 19 |
| | 4.1 | Standard mounting position | 19 |
| | 4.2 | Other mounting positions | 22 |
| 5 | Install | lation | 23 |
| | 5.1 | Line-side connection | 23 |
| | 5.2 | Output-side connection | 25 |
| 6 | Techr | nical data | 27 |
| | 6.1 | Input | 27 |
| | 6.2 | Output | 29 |
| | 6.3 | Efficiency and power loss | 32 |
| | 6.4 | Closed-loop control | 36 |
| | 6.5 | Protection and monitoring | 37 |
| | 6.6 | MTBF | 37 |
| | 6.7 | Mechanical system | 37 |
| | 6.8 | Accessories | 39 |
| | 6.9 | Dimension drawing | 39 |
| 7 | Safety | y, approvals, EMC | 41 |
| | 7.1 | Safety | 41 |
| | 7.2 | Test voltage | 42 |
| | 7.3 | Certifications | 43 |
| | 7.4 | EMC | 44 |

| 8 | Ambie | ent conditions | 45 |
|----|--------|--|----|
| 9 | Applic | cations | 47 |
| | 9.1 | Parallel connection to increase the power rating | 47 |
| | 9.2 | Parallel connection for redundancy | 49 |
| | 9.3 | Series connection for increased voltage | 51 |
| | 9.4 | Protection against short-time voltage dips | 52 |
| 10 | Enviro | onment | 53 |
| 11 | Servi | ice & Support | 55 |

Safety instructions

WARNING

Correct handling of the devices

When operating electrical devices, it is inevitable that certain components will carry dangerous voltages.

Therefore, failure to handle the units properly can result in death or serious physical injury as well as extensive property damage.

Only appropriately qualified personnel may work on or in the vicinity of this equipment.


Perfect, safe, and reliable operation of this equipment is dependent on proper transportation, storage, installation and mounting.

Before installation or maintenance work can begin, the system's main switch must be switched off and measures taken to prevent it being switched on again.

If this instruction is not observed, touching live parts can result in death or serious injury.

2.1 Device description

SITOP PSU100C are primary clocked power supplies for connection to a 1-phase AC line supply or to DC power systems. An electronically regulated DC voltage that can be set via a potentiometer is available at the output of the device (not for the devices: 6EP1331-5BA00, 6EP1332-5BA20). The output of the device is isolated, no-load proof and short-circuit proof. The LED display indicates the operating status.

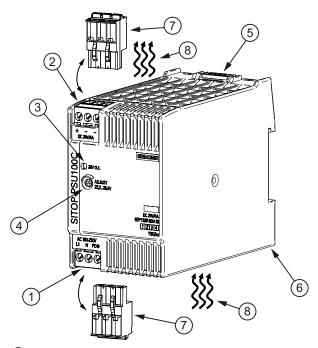

- 1 Line input (pluggable screw terminal)
- 2 DC output (pluggable screw terminal)
- 3 Indicator light (output voltage OK)
- 4 Potentiometer 22.2...26.4 V/10.5...12.9 V
- Slider to manually release
- 6 Lug for releasing with a screwdriver
- Spring-loaded terminal MLFB 6EP1971-5BA00 (accessory)
- 8 Natural convection

Figure 2-1 Design (example: 6EP1332-5BA10)

2.2 Connections and terminal designation

The line input terminals ① can be used to establish the connection to supply voltage. The output terminals ② are used to connect to the loads to be supplied (see also Section Installation (Page 23)).

| Connections and terminal designations | | |
|---------------------------------------|--|--|
| ① line input L, N, PE | One screw terminal each for 0.5 to 2.5 mm² | |
| ② Output + | 1 screw terminal for 0.52.5 mm² | |
| ② Output – | 2 screw terminals for 0.52.5 mm² | |

| | 1 + 2 | 7 | 4 |
|----------|-------------------------------|-------------------------------|--|
| | SZS 0,6 x 3,5 / PZ1 / PH1 | SZS 0,6 x 3,5 | SZS 0,6 x 3 / PZ1 / PH1 max. Ø 3,5 mm |
| | 1 x 0,5 - 2,5 mm ² | 1 x 0,5 - 2,5 mm ² | - |
| | 1 x 0,5 - 2,5 mm ² | 1 x 0,5 - 2,5 mm ² | - |
| AWG | 28 - 12 | 26 - 16 | - |
| Nm | 0,5 Nm | - | 0,04 Nm |
| * | 7 - 8 mm | 12 - 13 mm | - |

Figure 2-2 Terminal data

2.3 Potentiometer

The potentiometer ④ on the front of the device is used to adjust the output voltage. The output voltage is set to the rated value at the factory and can be set within certain limits; for example, to compensate voltage drops across long supply lines to the connected load.

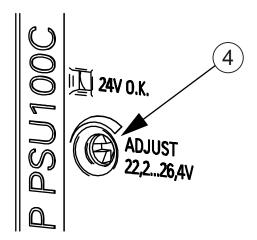


Figure 2-3 Potentiometer (example 6EP1332-5BA10)

| Туре | Factory setting | Setting range |
|----------------------------|-----------------|---------------|
| 6EP1321-5BA00 (12 V/2 A) | 12 V | 10.512.9 V |
| 6EP1322-5BA10 (12 V/6.5 A) | | |
| 6EP1331-5BA10 (24 V/1.3 A) | 24 V | 22.226.4 V |
| 6EP1332-5BA00 (24 V/2.5 A) | | |
| 6EP1332-5BA10 (24 V/4 A) | | |
| 6EP1331-5BA00 (24 V/0.6 A) | 24 V | - |
| 6EP1332-5BA20 (24 V/3.7 A) | | |

The following devices do not have a potentiometer: 6EP1331-5BA00 and 6EP1332-5BA20.

NOTICE

Thermal overload possible

When adjusting the output voltage to >24 V or >12 V, the output current must be derated by 4%/V.

Note

It is only permissible to activate the potentiometer using an insulated screwdriver.

For notes on actuating the potentiometer (screwdriver, torque), see Figure 2-2 Terminal data (Page 10).

2.4 Operating displays and signaling

| | 6EP1321-5BA00 (12 V/2 A) |
|-------------------|---------------------------------|
| | 6EP1322-5BA10 (12 V/6.5 A) |
| | 6EP1331-5BA00 (24 V/0.6 A) |
| | 6EP1331-5BA10 (24 V/1.3 A) |
| | 6EP1332-5BA00 (24 V/2.5 A) |
| | 6EP1332-5BA20 (24 V/3.7 A) |
| | 6EP1332-5BA10 (24 V/4 A) |
| Operating display | Green LED for output voltage OK |




Figure 2-4 Operating displays and signals (example of 6EP1332-5BA10)

| Signaling | 6EP1321-5BA00 (12 V/2 A) |
|-----------------------|--|
| | 6EP1322-5BA10 (12 V/6.5 A) |
| | 6EP1331-5BA00 (24 V/0.6 A) |
| | 6EP1331-5BA10 (24 V/1.3 A) |
| | 6EP1332-5BA00 (24 V/2.5 A) |
| | 6EP1332-5BA20 (24 V/3.7 A) |
| | 6EP1332-5BA10 (24 V/4 A) |
| LED ③ lights up green | Normal operation, output voltage present |
| LED ③ off | Output voltage not present |

2.5 Block diagram

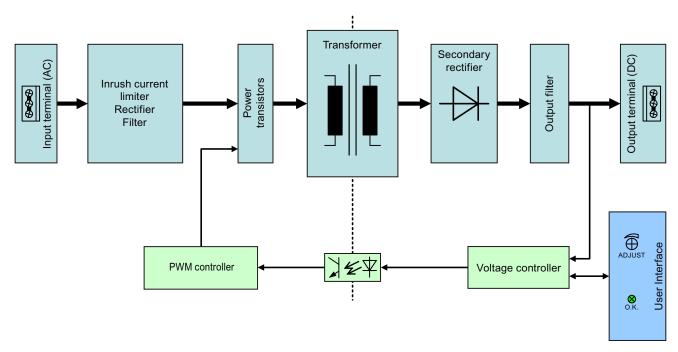


Figure 2-5 Block diagram

2.6 Dimensions and weight

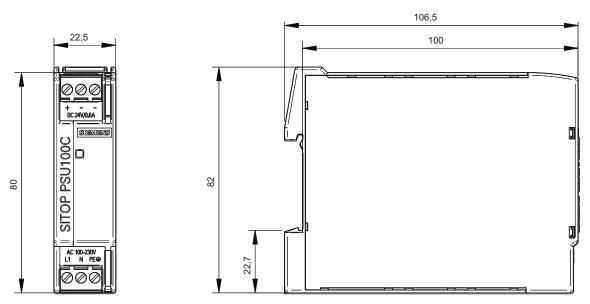


Figure 2-6 Dimension drawing 6EP1331-5BA00

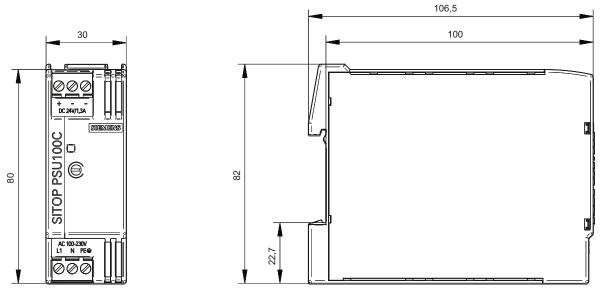


Figure 2-7 Dimension drawing 6EP1331-5BA10, 6EP1321-5BA00

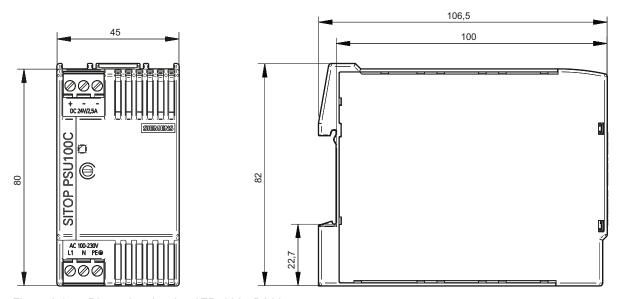


Figure 2-8 Dimension drawing 6EP1332-5BA00

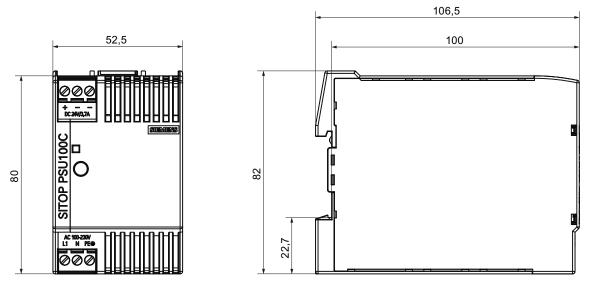


Figure 2-9 Dimension drawing 6EP1332-5BA20, 6EP1332-5BA10, 6EP1322-5BA10

2.6 Dimensions and weight

| | 6EP1331-5BA00 (24 V/0.6 A) | 6EP1321-5BA00 (12 V/2 A) | 6EP1332-5BA00 (24 V/2.5 A) | 6EP1322-5BA10 (12 V/6.5 A) |
|---------------------------------|-------------------------------|-------------------------------|--|-------------------------------|
| | (= : ::::714) | 6EP1331-5BA10 (24 V/1.3 A) | (= : · · · · · · · · · · · · · · · · · · | 6EP1332-5BA20 (24 V/3.7 A) |
| | | | | 6EP1332-5BA10 (24 V/4 A) |
| Dimensions (W × H × D) in mm | 22.5 × 80 × 100 | 30 × 80 × 100 | 45 × 80 × 100 | 52.5 × 80 × 100 |
| Weight | Approx. 0.12 kg | Approx. 0.17 kg | Approx. 0.22 kg | Approx. 0.32 kg |

Mounting/disassembly

WARNING

Installing the device in a housing or a control cabinet

SITOP PSU100C power supplies are built-in units. They must be installed in a casing or control cabinet to which only qualified personnel have access.

The devices can be mounted in a control cabinet on standard mounting rails according to EN 60715 35x7,5/15.

Mounting

To mount the device, position it with the mounting rail guide at the upper edge of the standard mounting rail and press down to lock it into place. If this is too difficult, press slider ① or lug ② at the same time, as described for "Removing".

Removing

To remove, press slider ① by hand downwards, or pull the lug ② using a screwdriver ③ – and withdraw the device at the lower edge of the standard mounting rail. Then you can remove the device from the upper edge of the DIN rail.

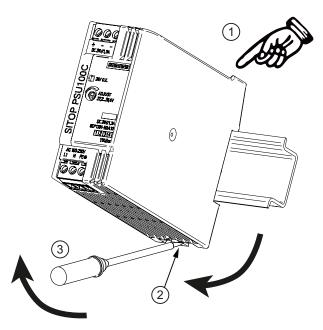


Figure 3-1 Mounting (example: 6EP1331-5BA10)

MWARNING

Use in hazardous zones

If the device is to be used in a hazardous zone (Ex II 3G Ex nA IIC T4 Gc) it must be installed in a distribution box with degree of protection IP54 or higher.

Mounting position, mounting clearances

4

4.1 Standard mounting position

The device is mounted on standard mounting rails according to EN 60715 35x7,5/15. The device must be mounted vertically in such a way that the input terminals are at the bottom and the output terminals are at the top to ensure correct cooling.

A clearance of at least 50 mm must always be maintained above and below the device. In the vicinity of cable ducts it is only permissible to reduce the clearance to a minimum of 25 mm (see Figure 4-1 Mounting (Page 19)).

Lateral clearances do not have to be maintained.

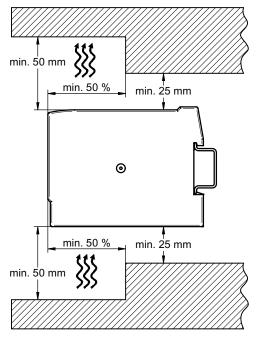


Figure 4-1 Mounting

4.1 Standard mounting position

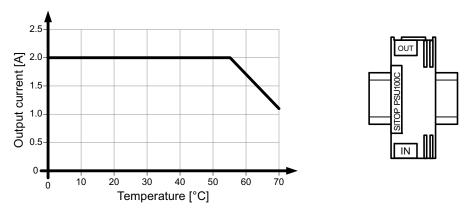


Figure 4-2 6EP1321-5BA00: Output current in the standard mounting position

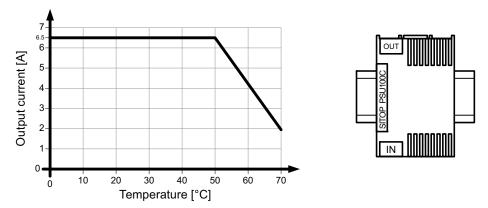


Figure 4-3 6EP1322-5BA10: Output current in the standard mounting position

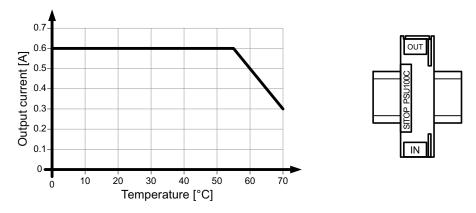


Figure 4-4 6EP1331-5BA00: Output current in the standard mounting position

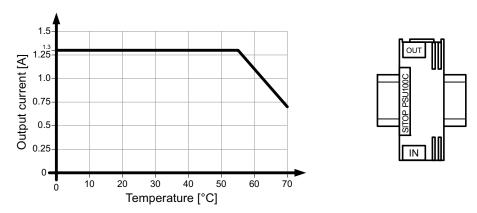


Figure 4-5 6EP1331-5BA10: Output current in the standard mounting position

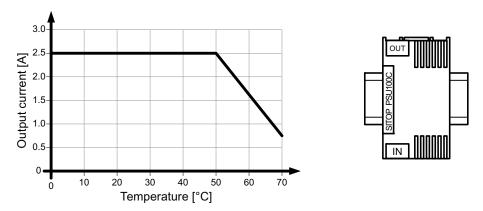


Figure 4-6 6EP1332-5BA00: Output current in the standard mounting position

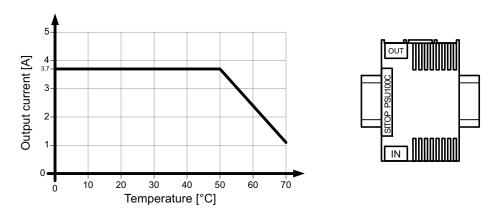


Figure 4-7 6EP1332-5BA20: Output current in the standard mounting position

4.2 Other mounting positions

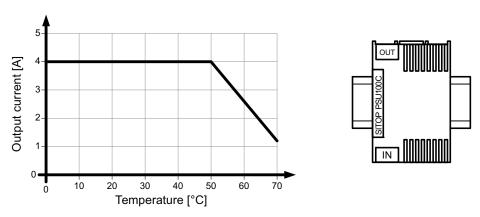


Figure 4-8 6EP1332-5BA10: Output current in the standard mounting position

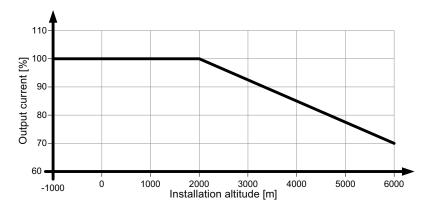


Figure 4-9 Mounting height derating

For details, see Section Ambient conditions (Page 45)

4.2 Other mounting positions

Not permitted.

Installation

MARNING

Hazard due to electric shock

Before installation or maintenance work can begin, the system's main switch must be switched off and measures taken to prevent it being switched on again. If this instruction is not observed, touching live parts can result in death or serious injury.

5.1 Line-side connection

SITOP PSU100C power supplies are designed for connection to 1-phase AC line supplies (TN or TT system according to VDE 0100 T 300 / IEC 364-3) with a rated voltage of 1-phase 100-230 VAC, 50/60 Hz or to a power supply with 120-230 V DC.




Figure 5-1 Line connection (example 6EP1332-5BA10)

The line supply is connected using terminal L1, N and PE (see Figure 5-1 Line connection (example 6EP1332-5BA10) (Page 23)), and must be implemented according to IEC 60364 and EN 50178. A protective device (miniature circuit-breaker or circuit-breaker) and a disconnection unit for the power supply must be provided. A ground-fault circuit interrupter is not permissible against indirect contact as the only protective measure. This is true for the complete line supply protected by the ground-fault circuit interrupter.

5.1 Line-side connection

Protection

| OITOD DOLLAGOO | December and adding side masks able to |
|-------------------------------|--|
| SITOP PSU100C | Recommended line-side protection |
| 6EP1321-5BA00 (12 V/2 A) | Miniature circuit-breaker (IEC 898): Characteristic B from 16 A and higher or characteristic C from 10 A |
| 6EP1322-5BA10 (12 V/6.5 A) | Miniature circuit-breaker (IEC 898): Characteristic B from 16 A and higher or characteristic C from 10 A |
| 6EP1331-5BA00 (24 V/0.6 A) | Miniature circuit-breaker (IEC 898): Characteristic B from 16 A and higher or characteristic C from 10 A |
| 6EP1331-5BA10 (24 V/1.3 A) | Miniature circuit-breaker (IEC 898): Characteristic B from 16 A and higher or characteristic C from 10 A |
| 6EP1332-5BA00 (24 V/2.5 A) | Miniature circuit-breaker (IEC 898): Characteristic B from 16 A and higher or characteristic C from 10 A |
| 6EP1332-5BA20 (24 V/3.7 A) | Miniature circuit-breaker (IEC 898): Characteristic B from 16 A and higher or characteristic C from 10 A |
| 6EP1332-5BA10 (24 V/4 A) | Miniature circuit-breaker (IEC 898): Characteristic B from 16 A and higher or characteristic C from 10 A |

The protective conductor of the line supply must be connected at the PE terminal.

Other country-specific regulations may have to be observed when installing the device.

Note

For operation on a DC power system (DC), the plus pole (+) must be connected to L1 and the minus pole (-) to N.

5.2 Output-side connection

The SITOP PSU100C power supplies provide an isolated (= non-grounded) SELV (Safety Extra Low Voltage) output voltage. The output of the power supplies is no-load, overload and short-circuit proof. If an overload occurs, the electronic current limiting function limits the output current to a maximum value (refer to Chapter Technical data (Page 27)).

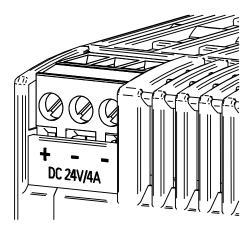


Figure 5-2 Connecting the output voltage (example 6EP1332-5BA10)

The output voltage is connected via the + and - terminals at the output of the power supply (see Figure 5-2 Connecting the output voltage (example 6EP1332-5BA10) (Page 25)). Make sure that the output cables are dimensioned correctly for the maximum output current rms value and fused accordingly.

Note

If the safety concept of the plant or system specifies that the DC output circuit should be grounded (PELV), then it is permissible that the output voltage of the SITOP power supply is grounded. In this case, ideally, the grounding at the output should be directly connected from terminal "-" of the power supply to a suitable connection point of the protective conductor system (PE) of the plant or system using a minimum 1.5 mm² conductor cross-section.

5.2 Output-side connection

Technical data

Note

For an AC input voltage, the technical data is applicable for rated input voltage, rated load and +25° C ambient temperature (if nothing else is specified).

6.1 Input

| | 6EP1321-5BA00 | 6EP1322-5BA10 | 6EP1331-5BA00 | 6EP1331-5BA10 |
|---|-----------------------|---------------------------|-------------------------|-----------------------|
| | (12 V/2 A) | (12 V/6.5 A) | (24 V/0.6 A) | (24 V/1.3 A) |
| Input | 1-phase AC or DC | | | |
| Rated voltage <i>U</i> e rated / for AC | 100230 V | | | |
| Voltage range / for AC | 85264 V | | | |
| Rated voltage Ue rated / for DC | 120230 V | | | |
| Voltage range / for DC | 110300 V | | | |
| Wide-range input | Yes | | | |
| Overvoltage strength | 2.3 x Ue rated, 1.3 r | ns | | |
| Power failure buffering at la rated, min. | 20 ms | | | |
| Power failure buffering | at Ue = 230 V | | | |
| Rated line frequency | 50/60 Hz | | | |
| Line frequency range | 4763 Hz | | | |
| Input current / at rated value of input voltage 100 V/rated value | 0.63 A | 1.6 A | 0.28 A | 0.63 A |
| Input current / at rated value of input voltage 230 V | 0.31 A | 0.8 A | 0.18 A | 0.31 A |
| Inrush current limiting (+ 25 °C), max. | 33 A | 31 A | 28 A | 34 A |
| I²t, max. | 1.2 A²·s | 3 A²-s | 0.7 A ² ·s | 1.2 A ² ·s |
| Integrated input fuse | Internal | | | |
| Protection in the line feeder cable (IEC 898) | Recommended mini | iature circuit-breaker: C | haracteristic B from 16 | A or characteristic C |

6.1 Input

| | 6EP1332-5BA00 | 6EP1332-5BA20 | 6EP1332-5BA10 | |
|---|--|---------------|---------------|--|
| | (24 V/2.5 A) | (24 V/3.7 A) | (24 V/4 A) | |
| Input | 1-phase AC or DC | | | |
| Rated voltage <i>U</i> e rated / for AC | 100230 V | | | |
| Voltage range / for AC | 85264 V | | | |
| Rated voltage Ue rated / for DC | 120230 V | | | |
| Voltage range / for DC | 110300 V | | | |
| Wide-range input | Yes | | | |
| Overvoltage strength | 2.3 x Ue rated, 1.3 ms | | | |
| Power failure buffering at la rated, min. | 20 ms | | | |
| Power failure buffering | at Ue = 230 V | | | |
| Rated line frequency | 50/60 Hz | | | |
| Line frequency range | 4763 Hz | | | |
| Input current / at rated value of input voltage 100 V/rated value | 1.21 A | 1.88 A | 2.25 A | |
| Input current / at rated value of input voltage 230 V | 0.67 A | 0.95 A | 1.15 A | |
| Inrush current limiting (+ 25 °C), max. | 31 A | 30 A | 34 A | |
| I²t, max. | 2.4 A ^{2.} s | 3 A²·s | 3 A²⋅s | |
| Integrated input fuse | Internal | | | |
| Protection in the line feeder cable (IEC 898) | Recommended miniature circuit-breaker: Characteristic B from 16 A and higher or characteristic C from 10 A | | | |

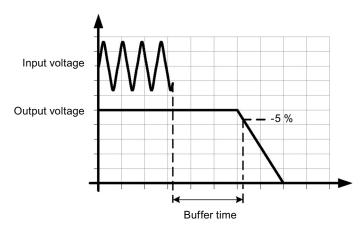


Figure 6-1 Power failure buffering

6.2 Output

| | 6EP1321-5BA00 | 6EP1322-5BA10 | 6EP1331-5BA00 | 6EP1331-5BA10 |
|---|--------------------------------------|--------------------------------------|-------------------------------------|--------------------------------------|
| | (12 V/2 A) | (12 V/6.5 A) | (24 V/0.6 A) | (24 V/1.3 A) |
| Output | Regulated, isolated | DC voltage | | |
| Rated voltage value Ua rated DC | 12 V | 12 V | 24 V | 24 V |
| Total tolerance, static ± | 3 % | 3 % | 3 % | 3 % |
| Static line regulation, approx. | 0.1 % | 0.1 % | 0.1 % | 0.1 % |
| Static load regulation, approx. | 0.2 % | 0.2 % | 0.2 % | 0.2 % |
| Residual ripple peak-peak, max. | 200 mV | 200 mV | 200 mV | 200 mV |
| Residual ripple peak-peak, typ. | 40 mV | 80 mV | 40 mV | 25 mV |
| Spikes peak-peak, max. (bandwidth, approx. 20 MHz) | 300 mV | 300 mV | 300 mV | 300 mV |
| Spikes peak-peak, typ. (bandwidth, approx. 20 MHz) | 50 mV | 80 mV | 20 mV | 20 mV |
| Setting range | 10.512.9 V | 10.512.9 V | - | 22.226.4 V |
| Product function / output voltage can be adjusted | Yes | Yes | No | Yes |
| Setting the output voltage | using a potentiometer | using a potentiometer | - | using a potentiometer |
| Operating display | LED green for outpu | it voltage OK | | |
| Response when switching on/off | Overshoot of Ua approx. 5 % | Overshoot of Ua approx. 1 % | Overshoot of Ua approx. 5 % | Overshoot of Ua approx. 5 % |
| Starting delay, max. | 0.6 s | 1 s | 1 s | 0.6 s |
| Voltage rise, typ. | 10 ms | 500 ms | 25 ms | 90 ms |
| Rated current la rated | 2 A | 6.5 A | 0.6 A | 1.3 A |
| Current range | 02 A | 06.5 A | 00.6 A | 01.3 A |
| Remark | 2 A to +55° C, 1.1 A to +70° C | 6.5 A to +50° C, 1.95 A to +70° C | 0.6 A to +55° C, 0.3 A to +70° C | 1.3 A to +55° C, 0.7 A to +70° C |
| Output active power / typical | 24 W | 78 W | 14 W | 30 W |
| Short-time overload current / for a short circuit in operation / typical | 4.8 A | 14 A | 1 A | 3.1 A |
| Can be connected in parallel to increase the power rating | Yes | Yes | No | Yes |
| Remark | Power-up only with single rated load | Power-up only with single rated load | | Power-up only with single rated load |
| Number of devices that can be connected in parallel to increase the power rating, units | 2 | 2 | - | 2 |
| Output characteristic | See Figure 6-3 12 V (Page 31) | output characteristic | See Figure 6-4 24 (Page 31) | V output characteristic |

| | 6EP1332-5BA00 | 6EP1332-5BA20 | 6EP1332-5BA10 |
|---|--|-------------------------------------|--|
| | (24 V/2.5 A) | (24 V/3.7 A) | (24 V/4 A) |
| Output | Regulated, isolated DC voltage | | |
| Rated voltage value Ua rated DC | 24 V | | |
| Total tolerance, static ± | 3 % | 3 % | 3 % |
| Static line regulation, approx. | 0.1 % | 0.1 % | 0.1 % |
| Static load regulation, approx. | 0.2 % | 0.2 % | 0.2 % |
| Residual ripple peak-peak, max. | 200 mV | 200 mV | 200 mV |
| Residual ripple peak-peak, typ. | 55 mV | 90 mV | 80 mV |
| Spikes peak-peak, max. (bandwidth, approx. 20 MHz) | 300 mV | 300 mV | 300 mV |
| Spikes peak-peak, typ. (bandwidth, approx. 20 MHz) | 50 mV | 60 mV | 80 mV |
| Setting range | 22.226.4 V | - | 22.226.4 V |
| Product function / output voltage can be adjusted | Yes | No | Yes |
| Setting the output voltage | using a potentiometer | - | using a potentiometer |
| Operating display | LED green for output voltag | e OK | |
| Response when switching on/off | Overshoot of Ua approx. 1 % | Overshoot of Ua approx. 1 % | |
| Starting delay, max. | 0.7 s | 1.5 s | 1.5 ms |
| Voltage rise, typ. | 100 ms | 500 ms | 400 ms |
| Rated current la rated | 2.5 A | 3.7 A | 4 A |
| Current range | 02.5 A | 03.7 A | 04 A |
| Remark | 2.5 A to +50° C, 0.75 A to +70° C | 3.7 A to +50° C, 1.1 A to +70° C | 4 A to +50° C, 1.2 A to +70° C |
| Output active power / typical | 60 W | 89 W | 96 W |
| Short-time overload current / for a short circuit in operation / typical | 5.5 A | 5 A | 13 A |
| Can be connected in parallel to increase the power rating Remark | Yes Power-up only with single rated load | No | Yes Power-up only with single rated load |
| Number of devices that can be connected in parallel to increase the power rating, units | 2 | - | 2 |
| Output characteristic | See Figure 6-4 24 V output | characteristic (Page 31) | |

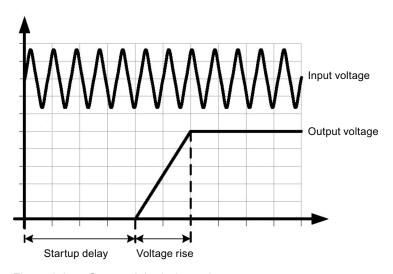


Figure 6-2 Startup delay/voltage rise

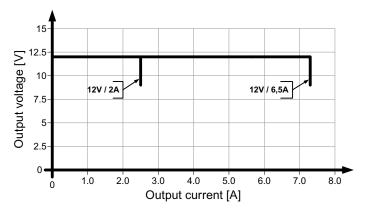


Figure 6-3 12 V output characteristic

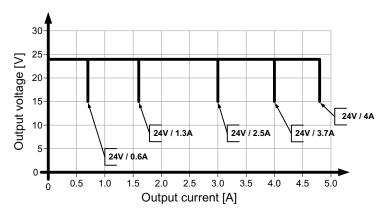


Figure 6-4 24 V output characteristic

6.3 Efficiency and power loss

The device supplies a constant output voltage until the current limit is reached. In the event of an overload, the output current and the output voltage are reduced. When the output voltage falls below approx. 9 V (12 V versions) and 15 V (24 V versions), the device switches off, and automatically restarts. This response is repeated as long as the overload condition is present.

6.3 Efficiency and power loss

| | 6EP1321-5BA00 (12 V/2 A) | 6EP1322-5BA10 (12 V/6.5 A) | 6EP1331-5BA00 (24 V/0.6 A) | 6EP1331-5BA10 (24 V/1.3 A) |
|--|-----------------------------|-------------------------------|-------------------------------|-------------------------------|
| Efficiency at Ua rated, la rated, approx. | 82 % | 86 % | 82 % | 86 % |
| Power loss at Ua rated, la rated, approx. | 5.8 W | 12.5 W | 2.6 W | 4.5 W |

| | 6EP1332-5BA00 | 6EP1332-5BA20 | 6EP1332-5BA10 | |
|---|---------------|---------------|---------------|--|
| | (24 V/2.5 A) | (24 V/3.7 A) | (24 V/4 A) | |
| Efficiency at Ua rated, la rated, approx. | 87 % | 87 % | 88 % | |
| Power loss at Ua rated, la rated, approx. | 9 W | 14 W | 13 W | |

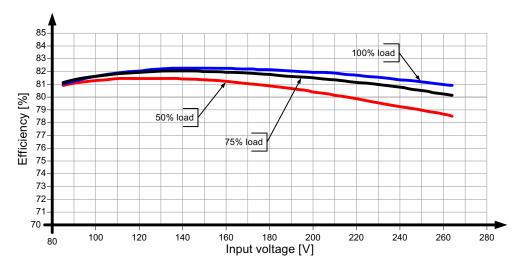


Figure 6-5 Efficiency for AC: 6EP1321-5BA00

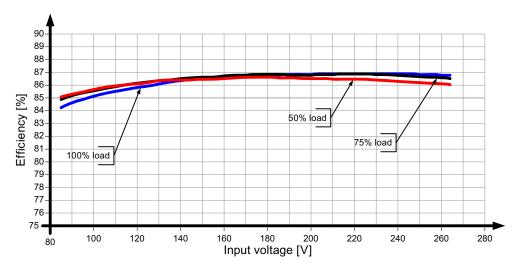


Figure 6-6 Efficiency for AC: 6EP1322-5BA10

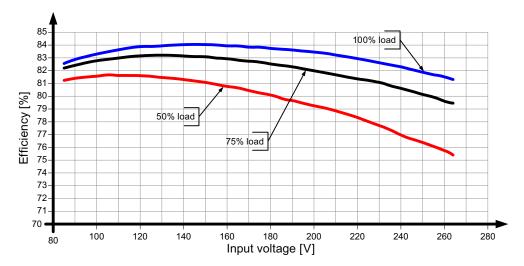


Figure 6-7 Efficiency for AC: 6EP1331-5BA00

6.3 Efficiency and power loss

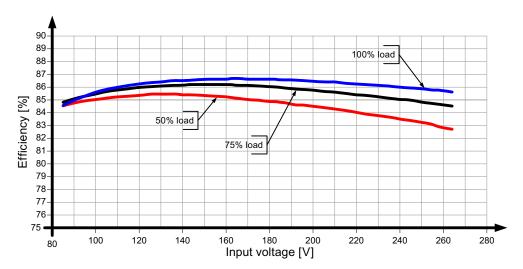


Figure 6-8 Efficiency for AC: 6EP1331-5BA10

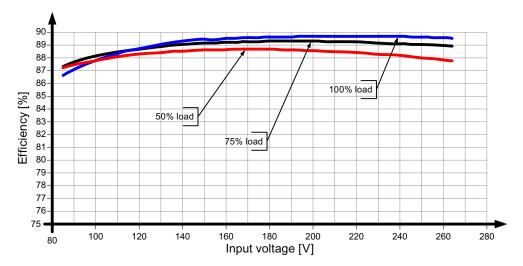


Figure 6-9 Efficiency for AC: 6EP1332-5BA00

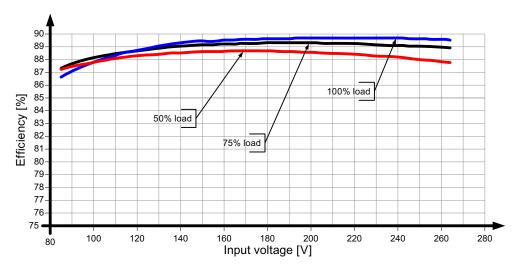


Figure 6-10 Efficiency for AC: 6EP1332-5BA20

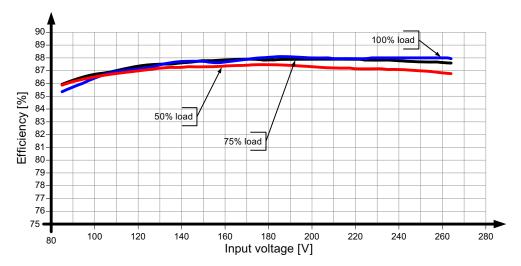


Figure 6-11 Efficiency for AC: 6EP1332-5BA10

6.4 Closed-loop control

| | 6EP1321-5BA00 (12 V/2 A) | 6EP1322-5BA10 (12 V/6.5 A) | 6EP1331-5BA00 (24 V/0.6 A) | 6EP1331-5BA10 (24 V/1.3 A) |
|---|-----------------------------|-------------------------------|-------------------------------|-------------------------------|
| Dyn. line compensation (Ue rated ±15%), max. | 0.1 % | 0.1 % | 0.1 % | 0.1 % |
| Dyn. load compensation (la: 10/90/10 %), Ua ± ,typ. | 3 % | 3 % | 3 % | 3 % |
| Load step compensation time 10 to 90 %, typ. | 4 ms | 3 ms | 3 ms | 5 ms |
| Load step compensation time 90 to 10 %, typ. | 3 ms | 3 ms | 3 ms | 5 ms |

| | 6EP1332-5BA00 (24 V/2.5 A) | 6EP1332-5BA20 (24 V/3.7 A) | 6EP1332-5BA10 (24 V/4 A) |
|---|-------------------------------|-------------------------------|-----------------------------|
| Dyn. line compensation (Ue rated ±15%), max. | 0.1 % | 0.1 % | 0.1 % |
| Dyn. load compensation (la: 10/90/10 %), Ua ± ,typ. | 3 % | 3 % | 3 % |
| Load step compensation time 10 to 90 %, typ. | 4 ms | 4 ms | 4 ms |
| Load step compensation time 90 to 10 %, typ. | 4 ms | 4 ms | 4 ms |

6.5 Protection and monitoring

| | 6EP1321-5BA00 (12 V/2 A) | 6EP1322-5BA10 (12 V/6.5 A) | 6EP1331-5BA00 (24 V/0.6 A) | 6EP1331-5BA10 (24 V/1.3 A) |
|--|------------------------------------|-------------------------------|-------------------------------|-------------------------------|
| Output overvoltage protection | Yes, according to E | N 60950-1 | | |
| Current limitation, typ. | 2.4 A | 7.2 A | 0.7 A | 1.4 A |
| Property of the output/short-circuit proof | Yes | | | |
| Short-circuit protection | Electronic trip, automatic restart | | | |

| | 6EP1332-5BA00 | 6EP1332-5BA20 | 6EP1332-5BA10 |
|--|------------------------------------|---------------|---------------|
| | (24 V/2.5 A) | (24 V/3.7 A) | (24 V/4 A) |
| Output overvoltage protection | Yes, according to EN 6 | 0950-1 | |
| Current limitation, typ. | 3 A | 4 A | 4.8 A |
| Property of the output/short-circuit proof | Yes | | |
| Short-circuit protection | Electronic trip, automatic restart | | |

6.6 MTBF

| | 6EP1321-5BA00 (12 V/2 A) |
|----------------------------|--|
| | 6EP1322-5BA10 (12 V/6.5 A) |
| | 6EP1331-5BA00 (24 V/0.6 A) |
| | 6EP1331-5BA10 (24 V/1.3 A) |
| | 6EP1332-5BA00 (24 V/2.5 A) |
| | 6EP1332-5BA20 (24 V/3.7 A) |
| | 6EP1332-5BA10 (24 V/4 A) |
| Mean Time Between Failures | SN29500: >500000 h at 40 °C, rated load, 24 hour operation |

6.7 Mechanical system

| | 6EP1321-5BA00 (12 V/2 A) | 6EP1322-5BA10 (12 V/6.5 A) | 6EP1331-5BA00 (24 V/0.6 A) | 6EP1331-5BA10 (24 V/1.3 A) | |
|---------------------------|---|-------------------------------|-------------------------------|-------------------------------|--|
| Connection system | Screw terminal | Screw terminal | | | |
| Connections / line supply | L, N, PE: removable screw terminal, for each 1 x 0.52.5 mm ² | | | | |
| Connections / output | +: 1 screw terminal for 0.52.5 mm²; -: 2 screw terminals for 0.52.5 mm² | | | | |

6.7 Mechanical system

| | 6EP1321-5BA00 | 6EP1322-5BA10 | 6EP1331-5BA00 | 6EP1331-5BA10 |
|--|--|---------------|---------------|---------------|
| | (12 V/2 A) | (12 V/6.5 A) | (24 V/0.6 A) | (24 V/1.3 A) |
| Width of the housing | 30 mm | 52.5 mm | 22.5 mm | 30 mm |
| Height of the housing | 80 mm | 80 mm | 80 mm | 80 mm |
| Depth of the housing | 100 mm | 100 mm | 100 mm | 100 mm |
| Mounting width | 30 mm | 52.5 mm | 22.5 mm | 30 mm |
| Mounting height | 180 mm | 180 mm | 180 mm | 180 mm |
| Weight, approx. | 0.12 kg | 0.32 kg | 0.12 kg | 0.17 kg |
| Product property / of the housing / housing that can be lined up next to one another | Yes | | | |
| Type of mounting / panel mounting | No | | | |
| Type of mounting / rail mounting | Yes | | | |
| Type of mounting / S7-300 rail mounting | No | | | |
| Mounting | Can be snapped onto standard EN 60715 35x7,5/15 mounting rails | | | |

| | 6EP1332-5BA00 | 6EP1332-5BA20 | 6EP1332-5BA10 | | |
|--|---|-------------------------|--------------------------|--|--|
| | (24 V/2.5 A) | (24 V/3.7 A) | (24 V/4 A) | | |
| Connection system | Screw terminal | | | | |
| Connections / line supply | L, N, PE: removable screw terminal, for each 1 x 0.52.5 mm ² | | | | |
| Connections / output | +: 1 screw terminal for | 0.52.5 mm²; -: 2 screw | terminals for 0.52.5 mm² | | |
| Width of the housing | 45 mm | 52.5 mm | 52.5 mm | | |
| Height of the housing | 80 mm | 80 mm | 80 mm | | |
| Depth of the housing | 100 mm | 100 mm | 100 mm | | |
| Mounting width | 45 mm | 52.5 mm | 52.5 mm | | |
| Mounting height | 180 mm | 180 mm | 180 mm | | |
| Weight, approx. | 0.22 kg | 0.32 kg | 0.32 kg | | |
| Product property / of the housing / housing that can be lined up next to one another | Yes | | | | |
| Type of mounting / panel mounting | No | | | | |
| Type of mounting / rail mounting | Yes | | | | |
| Type of mounting / S7-300 rail mounting | No | | | | |
| Mounting | Can be snapped onto | standard EN 60715 35x7, | 5/15 mounting rails | | |

6.8 Accessories

| | 6EP1321-5BA00 (12 V/2 A) |
|------------------------|--|
| | 6EP1322-5BA10 (12 V/6.5 A) |
| | 6EP1331-5BA00 (24 V/0.6 A) |
| | 6EP1331-5BA10 (24 V/1.3 A) |
| | 6EP1332-5BA00 (24 V/2.5 A) |
| | 6EP1332-5BA20 (24 V/3.7 A) |
| | 6EP1332-5BA10 (24 V/4 A) |
| Mechanical accessories | Removable 6EP1971-5BA00 spring-loaded terminal |

6.9 Dimension drawing

See Section Dimensions and weight (Page 14)

CAD data that can be downloaded from the Internet:

6EP1321-5BA00

(http://www.automation.siemens.com/bilddb/index.aspx?objKey=G_KT01_XX_00411)

6EP1322-5BA10

(http://www.automation.siemens.com/bilddb/index.aspx?objKey=G_KT01_XX_00468)

6EP1331-5BA00

(http://www.automation.siemens.com/bilddb/index.aspx?objKey=G_KT01_XX_00415)

6EP1331-5BA10

(http://www.automation.siemens.com/bilddb/index.aspx?objKey=G_KT01_XX_00419)

6EP1332-5BA00

(http://www.automation.siemens.com/bilddb/index.aspx?objKey=G_KT01_XX_00462)

6EP1332-5BA20

(http://www.automation.siemens.com/bilddb/index.aspx?objKey=G_KT01_XX_00717)

6EP1332-5BA10

(http://www.automation.siemens.com/bilddb/index.aspx?objKey=G_KT01_XX_00465)

Safety, approvals, EMC

7.1 Safety

| | 6EP1321-5BA00 (12 V/2 A) |
|---|---|
| | 6EP1322-5BA10 (12 V/6.5 A) |
| | 6EP1331-5BA00 (24 V/0.6 A) |
| | 6EP1331-5BA10 (24 V/1.3 A) |
| | 6EP1332-5BA00 (24 V/2.5 A) |
| | 6EP1332-5BA20 (24 V/3.7 A) |
| | 6EP1332-5BA10 (24 V/4 A) |
| Driman/laggendan/ galvania isolation | V |
| Primary/secondary galvanic isolation | Yes |
| Galvanic isolation | SELV output voltage Ua according to EN 60950-1 and EN 50178 |
| | |
| | SELV output voltage Ua according to EN 60950-1 and EN 50178 |
| Galvanic isolation | SELV output voltage Ua according to EN 60950-1 and EN 50178 Transformer according to EN 61558-2-16 |
| Galvanic isolation Protection class | SELV output voltage Ua according to EN 60950-1 and EN 50178 Transformer according to EN 61558-2-16 Class I |
| Galvanic isolation Protection class Degree of protection (EN 60529) | SELV output voltage Ua according to EN 60950-1 and EN 50178 Transformer according to EN 61558-2-16 Class I IP20 |

7.2 Test voltage

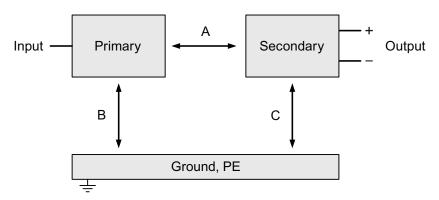


Figure 7-1 Test voltage diagram

Only the manufacturer can perform the type test and production test; users can also perform the field test.

Preconditions for performing the field test:

Tests (A) & (B)

- Connect the input terminals with one another
- · Connect the output terminals and PE together

Test (C)

• Connect the output terminals with one another and measure with respect to PE

Table 7- 1 Test voltage

| | Test time | Prim ↔ sec (A) | Prim ↔ PE (B) | Sec ↔ PE (C) |
|-----------------|-----------|----------------|---------------|--------------|
| Type test | 60 s | 4200 V DC | 2200 V DC | 700 V DC |
| | 60 s | 3000 VAC | 1500 VAC | 500 VAC |
| Production test | 1 s | 2200 V DC | 2200 V DC | 500 V DC |
| | 1 s | 1500 VAC | 1500 VAC | 350 VAC |
| Field test | 1 s | 2200 V DC | 2200 V DC | 500 V DC |
| | 1 s | 1500 VAC | 1500 VAC | 350 VAC |

Remark:

Tripping current for DC measurement: 0 mA

Tripping current for AC measurement: <100 mA

7.3 Certifications

| | 6EP1321-5BA00 | 6EP1322-5BA10 | 6EP1331-5BA00 | 6EP1331-5BA10 | |
|---------------------------------|--|------------------------|--------------------------|--------------------------|--|
| | (12 V/2 A) | (12 V/6.5 A) | (24 V/0.6 A) | (24 V/1.3 A) | |
| CE marking | Yes | | | | |
| UL/CSA approval | Yes | | | | |
| UL/cUL (CSA) approval | cULus-Listed (UL 50 1, UL 60950-1) | 08, CSA C22.2 No. 107. | 1), File E197259; cCSAu | us (CSA C22.2 No. 60950- | |
| NEC Class 2 | - | - | Yes | Yes | |
| Remark | | | Output limited to 100 VA | Output limited to 100 VA | |
| Explosion protection | ATEX (EX) II 3G Ex nA IIC T4; cCSAus (CSA C22.2 No. 213-M1987, ANSI/ISA-12.12.01-2007) Class I, Div. 2, Group ABCD, T4 | | | | |
| CB approval | Yes | | | | |
| Marine approval | GL, ABS | | | | |
| Degree of protection (EN 60529) | IP20 | | | | |

| | 6EP1332-5BA00 | 6EP1332-5BA20 | 6EP1332-5BA10 |
|---------------------------------|---|-----------------------------|------------------------------------|
| | (24 V/2.5 A) | (24 V/3.7 A) | (24 V/4 A) |
| CE marking | Yes | | |
| UL/CSA approval | Yes | | |
| UL/cUL (CSA) approval | cULus-Listed (UL 508, CSA 1, UL 60950-1) | C22.2 No. 107.1), File E197 | 7259; cCSAus (CSA C22.2 No. 60950- |
| NEC Class 2 | Yes | Yes | - |
| Remark | Output limited to 100 VA | Output limited to 100 VA | \ |
| Explosion protection | ATEX (EX) II 3G Ex nA IIC T 2007) Class I, Div. 2, Group | | . 213-M1987, ANSI/ISA-12.12.01- |
| CB approval | Yes | | |
| Marine approval | GL, ABS | | |
| Degree of protection (EN 60529) | IP20 | | |

7.4 EMC

| | | 6EP1321-5BA00 (12 V/2 A) |
|--|---------------|--|
| | | 6EP1322-5BA10 (12 V/6.5 A) |
| | | 6EP1331-5BA00 (24 V/0.6 A) |
| | | 6EP1331-5BA10 (24 V/1.3 A) |
| | | 6EP1332-5BA00 (24 V/2.5 A) |
| | | 6EP1332-5BA20 (24 V/3.7 A) |
| | | 6EP1332-5BA10 (24 V/4 A) |
| Electrostatic discharge | EN 61000-4-2 | 8 kV contact, 8 kV air |
| Electromagnetic fields | EN 61000-4-3 | 0.1580 MHz 10 V/m, 801000 MHz 20 V/m |
| High-speed transient disturbance variables (burst) | EN 61000-4-4 | 4 kV at line supply connections, 2 kV at the DC output |
| Surge voltages | EN 61000-4-5 | 3 kV symmetrical at the line supply connections |
| | | 6 kV symmetrical at the line supply connections |
| | | 500 V symmetrical/asymmetrical on DC output cables |
| High-frequency fields | EN 61000-4-6 | 10 V; 0.1580 MHz |
| Magnetic fields | EN 61000-4-8 | 30 A/m; 50 Hz |
| Voltage dips | EN 61000-4-11 | 100% for 20 ms, 60% for 200 ms, 30% for 500 ms |
| Voltage interruptions | EN 61000-4-11 | 100% for 5000 ms |
| Emitted interference | EN 55022 | Class B |
| Line harmonics limitation | EN 61000-3-2 | Class A |
| Generic standards | EN61000-6-2 | Immunity for industrial environments |
| | EN61000-6-3 | Emission for residential areas |

Ambient conditions

| | 6EP1322-5BA10 (12 V/6.5 A) | 6EP1321-5BA00 (12 V/2 A) | | |
|-----------------------------------|---|---|--|--|
| | 6EP1332-5BA00 (24 V/2.5 A) | 6EP1331-5BA00 (24 V/0.6 A) | | |
| | 6EP1332-5BA20 (24 V/3.7 A) | 6EP1331-5BA10 (24 V/1.3 A) | | |
| | 6EP1332-5BA10 (24 V/4 A) | | | |
| Ambient temperature | -20+70° C with natural convection | -20+70° C with natural convection | | |
| | from +50 °C: 3.5 % la rated/K | from +55 °C: 3 % la rated/K | | |
| | Tested according to: | Tested according to: | | |
| | • EN 60068-2-1 cold | • EN 60068-2-1 cold | | |
| | EN 60068-2-2 dry heat | EN 60068-2-2 dry heat | | |
| | EN 60068-2-78 humid heat, constant | EN 60068-2-78 humid heat, constant | | |
| | EN 60068-2-14 temperature change | EN 60068-2-14 temperature change | | |
| Transport and storage temperature | -40+85 °C | | | |
| | Tests (packed for shipping) according to: | | | |
| | • EN 60068-2-1 cold | | | |
| | EN 60068-2-2 dry heat | | | |
| | EN 60068-2-30 humid heat, cyclic | | | |
| Humidity class | Climate class 3K3 according to EN 60721, without condensation | | | |
| Mechanical stress in operation | Tested according to: | | | |
| | EN 60068-2-6 vibration, test Fc: | | | |
| | - 7 mm deflection in the range 59 Hz | | | |
| | - 2 g acceleration in the range 9150 Hz | | | |
| | • EN 60068-2-27 shock, test Ea: | | | |
| | - Acceleration 150 m/s², test duration 11 ms | | | |

| | 6EP1322-5BA10 (12 V/6.5 A) 6EP1321-5BA00 (12 V/2 A) | | | |
|----------------------|--|--|--|--|
| | 6EP1332-5BA00 (24 V/2.5 A) 6EP1331-5BA00 (24 V/0.6 A) | | | |
| | 6EP1332-5BA20 (24 V/3.7 A) 6EP1331-5BA10 (24 V/1.3 A) | | | |
| | 6EP1332-5BA10 (24 V/4 A) | | | |
| Damaging gases | Tested according to: | | | |
| | EN 60068-2-42 Sulfur dioxide: 10cm³ / m³, 4 days | | | |
| | EN 60068-2-43 Hydrogen sulfide: 1cm³ / m³, 4 days | | | |
| Atmospheric pressure | Operation: | | | |
| | • 1080 795 hPa (-1000 +2000 m) | | | |
| | For operation at altitudes of 2000 m up to 6000 m above sea level: output must be derated by -7.5% / 1000 m or the ambient temperature must be reduced by 5 K / 1000 m see Figure 4-9 Mounting height derating (Page 22) | | | |
| | Overvoltage category: III up to 2000 m (EN 50178) II from 2000 m up to 6000 m (EN 50178) | | | |
| | Storage: | | | |
| | • 1080 660 hPa (-1000 +3500 m) | | | |

Applications 9


9.1 Parallel connection to increase the power rating

To increase the power rating, two identical power supplies SITOP PSU100C, with the exception of 6EP1331-5BA00 and 6EP1332-5BA20, can be directly connected with one another galvanically.

The following must be observed:

- The output voltages of the power supplies to be connected in parallel may differ by a maximum of 0.2 % under no load conditions.
 When required, the output voltages must be adjusted with the potentiometer.
 To do this, the "-" terminals should be connected, and under no-load conditions, the voltage difference measured between the "+" terminals that have not been connected together. This voltage difference must not exceed 0.2%.
- The cables connected to each power supply at terminals "+" and "-" must have identical lengths and the same cable cross-sections (or the same impedance) up to a common external network junction (terminal strip) if possible.
- The power supplies connected in parallel must be switched on simultaneously with a common switch in the line feeder cable (e.g. with the main switch available in control cabinets).

SITOP

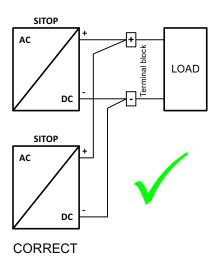

SITOP + LOAD

INCORRECT

Figure 9-1 Parallel connection

Note

The power-up of two SITOP PSU100C (2 × Ia,rated) power supplies is only permissible with the basic rated load (Ia, rated).

9.1 Parallel connection to increase the power rating

NOTICE

Protective circuit for the parallel connection of more than two power supplies

When connecting more than two power supplies in parallel, additional measures must be taken to prevent high reverse currents in the event of a secondary device fault. For this purpose, a suitable protective circuit (e.g. decoupling diode

or DC-compatible miniature circuit-breaker) must be installed between each "+" terminal of the power supply and the common connection point.

9.2 Parallel connection for redundancy

Connecting several SITOP PSU100C power supplies in parallel for redundancy purposes is required if especially high demands are placed on the availability of a reliable 24 V power supply.

Using the SITOP PSE202U redundancy module, two 24 V power supplies of the same type can be decoupled (Figure 9-2 Redundant configuration (Page 49)). When one of the devices fails, then the other automatically takes over the power supply. If one of the power supplies fails, then this is signaled using an LED on the redundancy module as well as an isolated relay contact.

When dimensioning the system, it must be ensured that n+1 redundant connected power supplies can handle the total power requirement of the remaining n power supplies.

Note

For a high reliability of the supply, it is recommended that the redundant switched power supplies are protected separately on the line-side and, if possible, be connected to different power supply networks.

Note

The SITOP PSE202U NEC Class 2 (6EP1962-2BA00) redundancy module must be used to create a redundant circuit configuration according to NEC Class 2 (Figure 9-3 Parallel connection with redundancy module for NEC Class 2 (Page 50)).

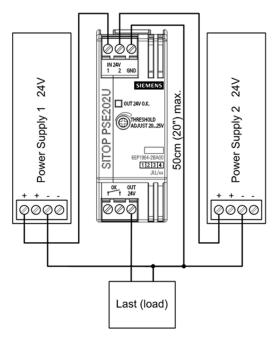


Figure 9-2 Redundant configuration

9.2 Parallel connection for redundancy

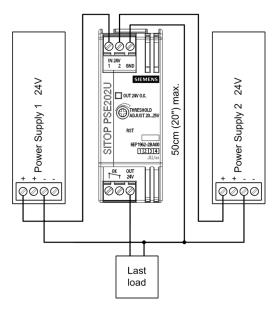


Figure 9-3 Parallel connection with redundancy module for NEC Class 2

You can find additional information at:

SITOP PSE202U manual (http://support.automation.siemens.com/WW/view/en/42248598)

9.3 Series connection for increased voltage

To achieve an output voltage of 48 V DC, two SITOP PSU100C power supplies of the same type can be connected in series. In this case, connect the "-" terminal of the first power supply to the "+" terminal of the second power supply. The "+" terminal of the first power supply and the "-" terminal of the second power supply are routed to the load.

Depending on the grounding point of the secondary output voltages, voltages of +48 V, ±24 V or -48 V can be realized.

In the case of an asymmetric load distribution, it is not possible to guarantee correct functionality.



SELV is not guaranteed in the case of a fault

When connecting two power supplies in series, the continuous, permissible SELV voltage of a maximum of 60 V DC according to EN 60950 cannot be guaranteed in the case of a fault




Figure 9-4 Series connection

9.4 Protection against short-time voltage dips

9.4 Protection against short-time voltage dips

During a drop in the primary-side supply voltage, SITOP PSU100C power supplies still maintain the output voltage over a short millisecond period (see section Technical data, Input (Page 27))

Environment 10

The device is in conformance with RoHS.

As a rule, only non-silicon precipitating materials are used.

Disposal guidelines



Packaging and packaging aids can and should always be recycled. The product itself may not be disposed of as domestic refuse.

Service & Support

Technical support

Technical support for all IA/DT products can be accessed through the following communication channels:

- Phone: +49 (0) 911 895 7222
- E-Mail (mailto:support.automation@siemens.com)
- Internet:
 Online support request form (http://www.siemens.de/automation/support-request)

Technical documentation on the Internet

Operating instructions and manuals for SITOP are available in the Internet: Operating instructions/manuals (http://www.siemens.de/sitop/manuals)

SITOP power supply homepage

General news about our power supplies is available in the Internet at the SITOP homepage: SITOP (http://www.siemens.de/sitop)

Information material

SITOP information can be downloaded from the Internet: Information and download center (http://www.siemens.de/sitop-infomaterial)

CAx data

2D/3D data and circuit diagram macros can be downloaded from the Internet: Siemens image database (http://www.siemens.de/sitop-cax)

Request all CAx data via the CAx download manager: CAx shopping cart (http://www.siemens.de/cax)

SITOP Selection Tool

Simply and quickly select the optimum the power supply or DC-UPS: SITOP Selection Tool (http://www.siemens.de/sitop-selection-tool)

Online catalog and ordering system

The online catalog and the online ordering system are available through the Industry Mall homepage:

Industry Mall (http://www.siemens.com/industrymall/de)

Contact persons

If you have any questions regarding the use of our products, then contact the Siemens contact person in your regional Siemens sales office.

You can find these addresses as follows:

- On the Internet (http://www.siemens.de/automation/partner)
- In Catalog CA 01