


Servo drive CMMT-AS

FESTO

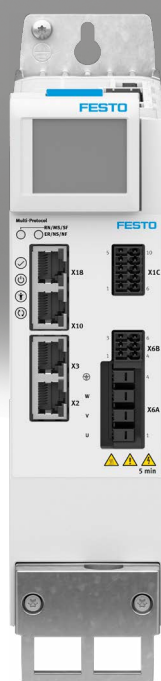

Key features

At a glance

- Universal servo drive for PM-synchronous servo motors with up to 12000 W continuous power
- Supports the motor series EMMT-AS, EMME-AS and EMMB-AS as well as third-party motors
- Integrated single-phase/three-phase mains connection 230/400 V AC, mains filter and braking resistor, connection option for external braking resistor
- Precise torque, speed and position control
- Motion from point-to-point to interpolated motion
- Comprehensively integrated protective functions for the servo drive, motor and axis with automatic motor shut-down/quick stop
- Bus protocols

EtherCAT

**PROFI
NET**


EtherNet/IP

Modbus

- Modbus TCP is available as an additional protocol for all EtherNet/IP devices
- Prepared device description files and function blocks for integration in PLC systems

- Configuration:
 - Automatically with the "Festo Automation Suite" as well as auto-tuning
 - Directly via fieldbus and PLC
 - Data backup concept via PLC or operating panel CDSB
- Supports digital absolute encoders (EnDat, Hiperface, Nikon-A) in the motor as well as incremental (A/B, Sin/Cos) displacement encoders on the axis
- Integrated safety functions:
 - Safe torque off (STO) up to SIL3/Cat. 4 PL e
 - Safe stop 1 (SS1) when using a suitable external safety relay unit and suitable circuitry for the servo drive
 - Safe brake control (SBC) up to SIL3/Cat. 3 PL e
 - Diagnostic outputs STA and SBA for feedback of the active safety function
 - Advanced safety functions such as SS1, SS2, SLS, SMS, SOS and control via IO and fieldbus available

The technology in detail

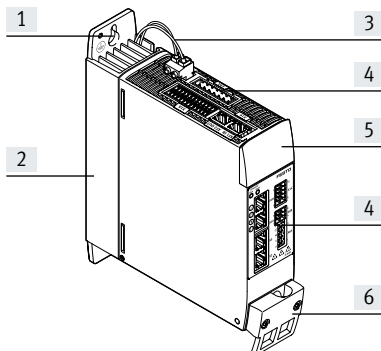

- [1] Elongated hole for mounting the servo drive on the control cabinet back wall
- [2] Cooling element for dissipating heat. The internal braking resistor is housed in the cooling element
- [3] Connection for braking resistor
- [4] Connections
- [5] Blind plate (optionally with plug-on operating panel CDSB a page 17)
- [6] Shield clamp and strain relief

Electric Motion Sizing

Configuring electromechanical drives



Create the optimum drive package quickly and reliably. Electric Motion Sizing calculates suitable combinations of electric axis, electric motor and servo drive using just a few application details. It provides you with all the relevant data including the bill of materials and documentation for the selected combination. This avoids design errors and results in significantly improved energy efficiency for the system.

A smooth connection to the Festo Automation Suite also makes commissioning easier for you.

To find out more, go to www.festo.com/ems

Key features

Library for EPLAN


→ www.festo.com/eplan



EPLAN macros for fast and reliable planning of electrical projects in combination with servo drives, motors and cables. This enables a high level of planning reliability, standardised documentation, and there is no need to create symbols, graphics and master data.


Festo Automation Suite

Parameterisation and programming software for electronic devices from Festo

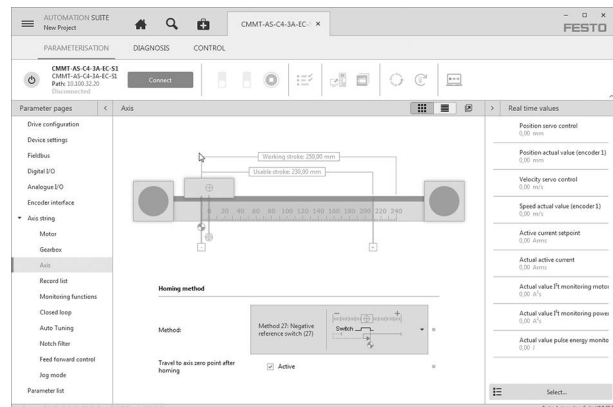

- Parameterisation, programming and commissioning in a clear and user-friendly interface
- Optimum support for complex processes thanks to guided wizards (e.g. for commissioning, drive configuration, etc.)
- Fast access to the required documents and additional information
- Easy integration of electric drives in the controller programming

System overview

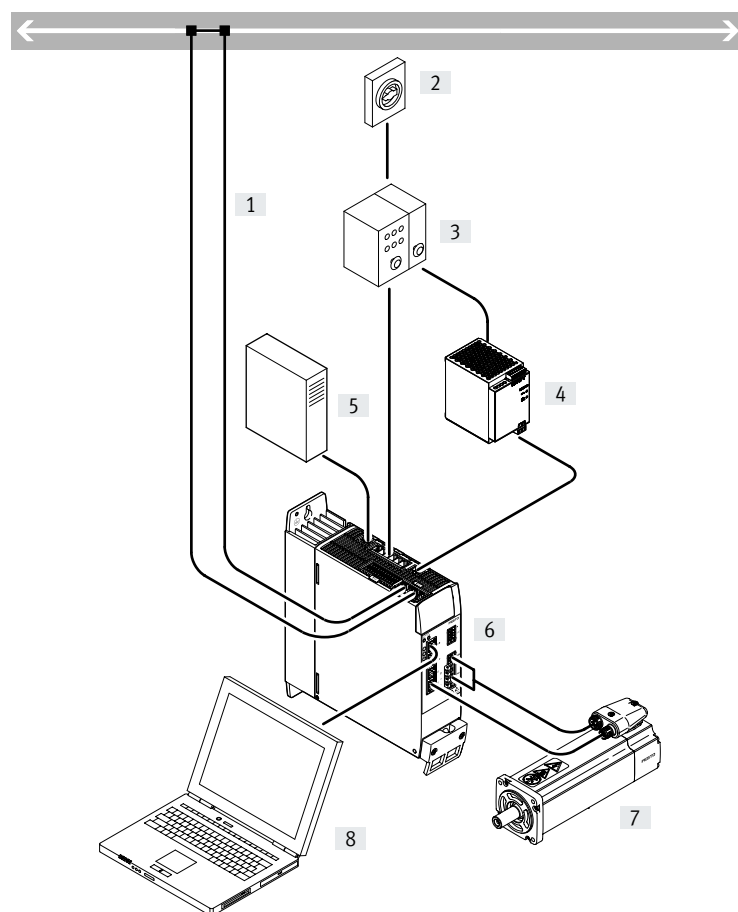

- [1] Bus/network
- [2] Main switch
- [3] Circuit breaker/fuses
- [4] Power supply unit for logic voltage supply 24 V DC (PELV)
- [5] External braking resistor (optional)
- [6] Servo drive CMMT-AS
- [7] Servo motor
- [8] PC with Ethernet connection for parameterisation

Type codes

001	Series	
CMMT	Motor controller	
002	Motor type	
AS	AC synchronous	
003	Nominal current	
C2	2 A	
C3	3 A	
C4	4 A	
C5	5 A	
C7	7 A	
C12	12 A	
C18	18 A	
C25	25 A	

004	Nominal input voltage	
3A	230 V AC/50-60Hz	
11A	400 V AC/50-60Hz	
005	Number of phases	
	Single-phase	
P3	Three-phase	
006	Bus protocol/activation	
MP	Multiprotocol	
007	Safety function	
S1	Standard safety	
S3	Advanced safety	

Datasheet

Bus protocols

EtherCAT®

PROFINET

EtherNet/IP™

Modbus



General technical data

CMMT-AS-	C2-3A	C4-3A	C2-11A	C3-11A	C5-11A	C7-11A	C12-11A	C18-11A	C25-11A
Type of mounting	Mounting plate, screwed in								
Display	Green/yellow/red LED or operating panel CDSB with plain-text message								
Controller operating mode	• Cascade controller • P position controller • PI speed controller • PI current controller for F or M • Profile operation with record and direct mode • Interpolated mode via fieldbus • Homing/setup mode/auto-tuning								
Operating mode	• Field-oriented control, position resolution 24-bit/rev. • Sampling rate 16 kHz • PWM with 8 or 16 kHz, vector modulation with third harmonic (16 kHz only with CMMT-AS-C2-3A and CMMT-AS-C4-3A) • Real-time data acquisition: – 2x input position capture – 2x output position trigger – 2x position encoder input – 1x SYNC interface for encoder emulation or encoder input								
Mounting position	Vertical								
Product weight [g]	1300	1400	2100	2100	2200	4100	4100	4300	4300

Bus protocols

Interface	EtherCAT®	PROFINET RT/IRT	EtherNet/IP	Modbus TCP
Function	Bus connection incoming/outgoing			
Process interfacing	Interpolated mode CSP	AC1: adjustable-speed drives	Adjustable-speed drives	Adjustable-speed drives
	Interpolated mode CSV	AC3: drives with positioning function		
	Interpolated mode CST	AC4: synchronous servo application		
	Point-to-point mode PP			
	Point-to-point mode PV			
	Point-to-point mode PT			
	Homing mode HM			
	Record table with 128 entries			
Communication profile	CiA402	PROFIdrive	DriveProfile	DriveProfile
	CoE (CANopen over EtherCAT)			
	EoE (Ethernet over EtherCAT)			
Max. fieldbus transmission rate	[Mbps]	100		
Connection type	2x socket			
Connection technology	RJ45			

Datasheet

Electrical data		C2-3A		C4-3A		C2-11A		C3-11A		C5-11A	
Output connection data											
Output voltage range	[V AC]	3x (0 – Input)									
Nominal current per phase	[A _{eff}]	2	4	1.7	2.5	5					
Peak current per phase	[A _{eff}]	6	12	5.1	7.5	15					
Max. peak current duration (at f _s › 5 Hz)	[s]	2									
Nominal power	[W]	350	700	800	1200	2500					
Peak power	[W]	1000	2000	2400	3600	7500					
Output frequency	[Hz]	0 ... 599									
Max. motor cable length1)	[m]	25/50			50/100						
Load voltage AC											
Nominal operating voltage phases		1-phase				3-phase					
Voltage input range	[V AC]	100 ... 230 (–20%/+15%)				200 ... 480 (–10%/+10%)					
Nominal operating voltage	[V AC]	230				400					
Nominal current	[A _{eff}]	2.8	5.6	2	3	6					
Peak current		8.4	16.8	6	9	18					
Mains frequency	[Hz]	48 ... 62									
System voltage in accordance with EN 61800-5-1	[V]	300									
Max. short circuit current rating of the mains	[kA]	100			10						
Mains types of system earthing		TN, TT, IT			TN, IT						
Mains filters		Built in									
Load voltage DC											
Voltage input range	[V DC]	80 ... 360			80 ... 700						
Max. intermediate circuit voltage	[V DC]	395			800						
Nominal current											
at 320 V DC	[A]	1.3	2.6	–	–	–					
at 560 V DC	[A]	–	–	1.5	2.3	4.7					
Logic supply											
Nominal voltage	[V DC]	24 ±20%									
Max. current consumption	[A]	0.5/2.3 ²⁾									0.5/2.5 ²⁾

1) Without/with external mains filter

2) Max. current at full expansion, with two position encoders, brake output and all I/Os with max. specified loads connected

Braking resistor		C2-3A		C4-3A		C2-11A		C3-11A		C5-11A	
CMMT-AS-											
Integrated											
Resistance	[Ω]	100				130					
Pulse power	[kW]	1.6				5					
Pulse energy	[Ws]	230				850					
Nominal power	[W]	23				48		48		58	
External											
Resistance	[Ω]	100 ... 160		67 ... 100		130 ... 250		130 ... 250		80 ... 130	
Max. continuous power	[W]	180		350		400		600		1200	

Datasheet

Electrical data		C7-11A	C12-11A	C18-11A	C25-11A
CMMT-AS-					
Output connection data					
Output voltage range	[V AC]	3x (0 – Input)			
Nominal current per phase	[A _{eff}]	7	12	18	25
Peak current per phase	[A _{eff}]	21	36	54	75
Max. peak current duration (at f _s › 5 Hz)	[s]	2			
Nominal power	[W]	4000	6000	9000	12000
Peak power	[W]	12000	18000	27000	36000
Output frequency	[Hz]	0 ... 599			
Max. motor cable length1)	[m]	25/100		50/100	
Load voltage AC					
Nominal operating voltage phases		3-phase			
Voltage input range	[V AC]	200 ... 480 (–10%/+10%)			
Nominal operating voltage	[V AC]	400			
Nominal current	[A _{eff}]	9	15	22	29
Peak current		27	45	66	87
Mains frequency	[Hz]	48 ... 62			
System voltage in accordance with EN 61800-5-1	[V]	300			
Max. short circuit current rating of the mains	[kA]	10			
Mains types of system earthing		TN, IT			
Mains filters		Built in			
Load voltage DC					
Voltage input range	[V DC]	80 ... 700			
Max. intermediate circuit voltage	[V DC]	800			
Nominal current					
at 560 V DC	[A]	7.5	11.2	17	23.5
Logic supply					
Nominal voltage	[V DC]	24 ±20%			
Max. current consumption	[A]	0.5/2.5 ²⁾		0.5/3.5 ²⁾	

1) Without/with external mains filter

2) Max. current at full expansion, with two position encoders, brake output and all I/Os with max. specified loads connected

Braking resistor					
CMMT-AS-		C7-11A	C12-11A	C18-11A	C25-11A
Integrated					
Resistance	[Ω]	47		24	
Pulse power	[kW]	13.6		24	
Pulse energy	[Ws]	1200			
Nominal power	[W]	100			
External					
Resistance	[Ω]	60 ... 85	40 ... 60	30 ... 40	20 ... 30
Max. continuous power	[W]	1500	3000	4500	5000

Datasheet

Motor auxiliary connections					
CMMT-AS-	C2-3A	C4-3A	C2-11A	C3-11A	C5-11A
Motor temperature monitoring					
Digital	Connection for temperature switch (PTC, N/C contact or N/O contact)				
Analogue	Connection for analogue temperature sensor (KTY81 ... 84, NTC, Pt1000)				
Output for holding brake					
Version	High-side switch; 24 V; monitored internally				
Output current	[A]	1.0			1.3
Output for 2nd brake					
Version	High-side switch; 24 V; monitored internally				
Output current	[A]	0.1			

Motor auxiliary connections				
CMMT-AS-	C7-11A	C12-11A	C18-11A	C25-11A
Motor temperature monitoring				
Digital	Connection for temperature switch (PTC, N/C contact or N/O contact)			
Analogue	Connection for analogue temperature sensor (KTY81 ... 84, NTC, Pt1000)			
Output for holding brake				
Version	High-side switch; 24 V; monitored internally			
Output current	[A]	1.5	2.3	
Output for 2nd brake				
Version	High-side switch; 24 V; monitored internally			
Output current	[A]	0.1		

Datasheet

Interfaces		
Ethernet		
Function	Parameterisation and commissioning	
Protocol	DHCP	
	TCP/IP	
Synchronisation		
Function	Encoder emulation A/B/Z	
	Encoder input A/B/Z	
Encoder output, characteristics	1 MHz maximum output frequency	
	Resolution up to 16384 ppr	
Encoder input, characteristics	1 MHz maximum input frequency	
	Resolution up to 16384 ppr	
Input/output		
Digital inputs		
Number	10 ... 12 (depending on device design)	
Number of high-speed	2	
Time resolution of high-speed	[µs]	1
Switching logic	PNP	
Characteristics	Not galvanically isolated	
	Freely configurable in some cases	
	Safety inputs in some cases	
Specification	Based on IEC 61131-2, type 3	
Operating range	[V]	0 ... 30
Digital outputs		
Number	4 ... 6 (depending on device design)	
Number of high-speed	2	
Time resolution of high-speed	[µs]	1
Switching logic	PNP	
Characteristics	Not galvanically isolated	
	Freely configurable in some cases	
Max. current	[mA]	20
Analogue setpoint inputs		
Number	1	
Characteristics	Differential input	
	Configurable for current/force, rotational speed and position	
Operating range	[V]	±10
Impedance	[kΩ]	70
Floating switching outputs		
Number	1	
Max. current	[mA]	50

Interfaces		
CMMT-AS-...-	S1	S3
Position encoders		
Function of position encoder 1	ENDAT 2.1 encoder	ENDAT 2.1 encoder
	ENDAT 2.2 encoder	ENDAT 2.2 encoder
	HIPERFACE encoder	HIPERFACE encoder
	Incremental encoder	Incremental encoder
	SIN/COS encoder	SIN/COS encoder
	BISS-C	BISS-C
	Nikon-A	Nikon-A
Function of position encoder 2	Incremental encoder	Incremental encoder
	ENDAT 2.2 encoder	–
	HIPERFACE encoder	–
	SIN/COS encoder	SIN/COS encoder

Datasheet

Safety data ¹⁾ CMMT-AS-...	-S1	-S3
Safety sub-functions up to SIL3	Safe torque off (STO)	Safe torque off (STO)
	Safe brake control (SBC)	Safe brake control (SBC)
	–	Safe stop 1, time controlled (SS1-t)
		Safe stop 1, ramp monitored (SS1-r)
		Safe stop 2, time controlled (SS2-t)
		Safe stop 2, ramp monitored (SS2-r)
		Safe operating stop (SOS)
		Safely limited speed (SLS)
		Safe maximum speed (SMS)
Safety sub-function up to Performance Level e, Category 4	Safe torque off (STO)	Safe torque off (STO)
	–	Safe brake control (SBC)
		Safe stop 1, time controlled (SS1-t)
Safety sub-function up to Performance Level e, Category 3	Safe brake control (SBC)	–
	–	Safe stop 1, ramp monitored (SS1-r)
		Safe stop 2, time controlled (SS2-t)
		Safe stop 2, ramp monitored (SS2-r)
		Safe operating stop (SOS)
		Safely limited speed (SLS)
		Safe maximum speed (SMS)
Safe communication protocol	–	PROFIsafe (Version 2.6)
Certificate-issuing authority	German Technical Control Board (TÜV) Rheinland 01/205/5640.01/23	German Technical Control Board (TÜV) Rheinland 01/205/6032.00/25
Hardware fault tolerance	1	1

1) Safety data can be found in the manual "Standard Safety, Safety Sub-functions" or "Advanced Safety, Safety Sub-functions ..".

Datasheet

Operating and environmental conditions		
Degree of protection		IP20
Ambient temperature ¹⁾	[°C]	0 ... +50
Storage temperature	[°C]	–25 ... +55
Relative humidity	[%]	5 ... 90 (non-condensing)
Protection class		I
Overvoltage category		III
Pollution degree		2
Surge resistance	[kV]	6
Max. setup altitude ²⁾	[m]	2000
Shock and vibration resistance		To EN 61800-2 and EN 61800-5-1
CE marking (see declaration of conformity)		To EU EMC Directive ³⁾
		To EU Machinery Directive
		To EU Low Voltage Directive
		To EU RoHS Directive
UKCA marking (see declaration of conformity)		To UK EMC regulations
		To UK RoHS regulations
		According to UK regulations for machines
KC marking		KC EMC
Certification		c UL us - Listed (OL)
		RCM
LABS (PWIS) conformity		VDMA24364-Zone III
Note on materials		RoHS-compliant

1) Above 40 °C, the power is reduced by 3% per K.

2) Above 1000 m, the power is reduced by 1% per 100 m.

3) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp d Certificates.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.


Datasheet

View of servo drives


Front view

- | | |
|--|---|
| [1] PE connection, housing | [7] [X9B] Connection for braking resistor |
| [2] [X5] Connection for operating panel (behind blind plate) | [8] [X1C] Inputs/outputs for the axis |
| [3] [X18] Standard Ethernet | [9] [X6B] Motor auxiliary connection |
| [4] [X10] Device synchronisation | [10] [X6A] Motor phase connection |
| [5] [X3] Position sensor 2 | [11] Shield clamp and strain relief |
| [6] [X2] Position sensor 1 | [12] DIL switch for the manual changeover of the fieldbuses |


CMMT-AS-...-3A

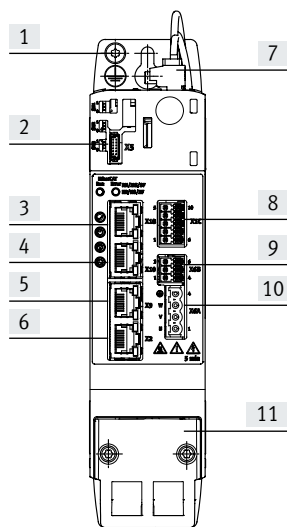

CMMT-AS-C2/C3/C5-...-11A

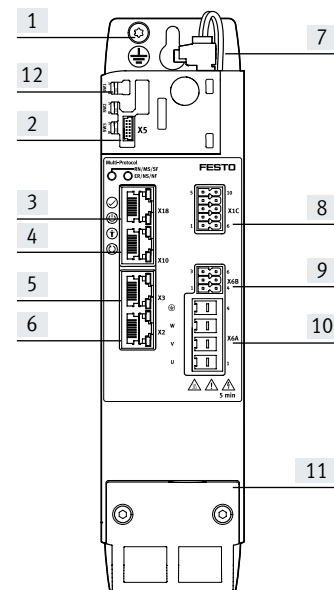


CMMT-AS-C7/C12/C18/C25-...-11A

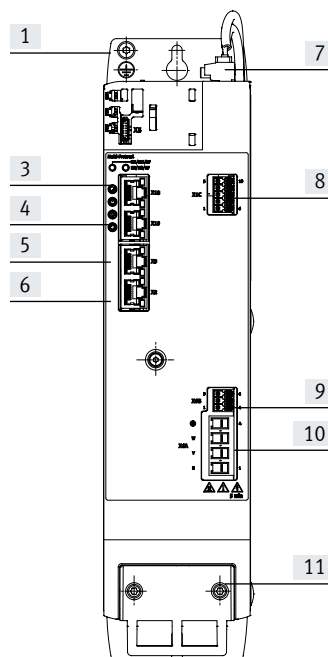


Top view

- | | |
|------------------------------------|--|
| [1] Cooling element | [5] [X9B] Connection for braking resistor |
| [2] [X1A] I/O interface | [6] [X9A] Supply: mains, DC link and logic voltage |
| [3] [XF2 OUT] RTE interface port 2 | [7] [X9A] Supply: mains and DC link voltage |
| [4] [XF1 IN] RTE interface port 1 | [8] [X9C] Supply: logic voltage |


CMMT-AS-...-3A

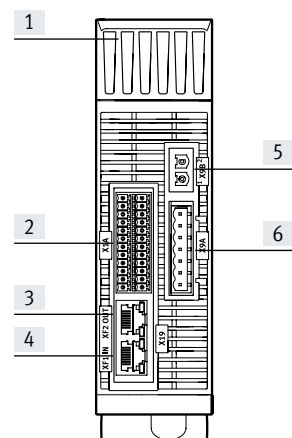

CMMT-AS-C2/C3/C5-...-11A

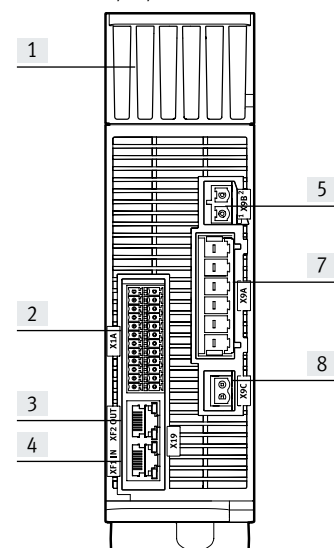


CMMT-AS-C7/C12/C18/C25-...-11A

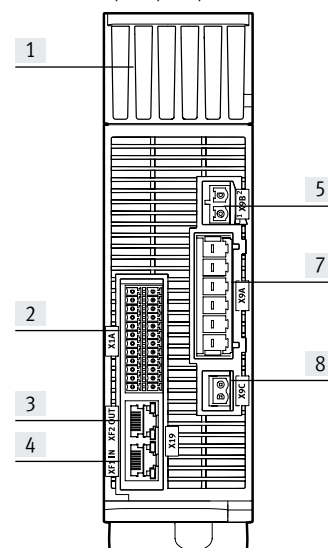

Datasheet

Installation clearance for servo drives

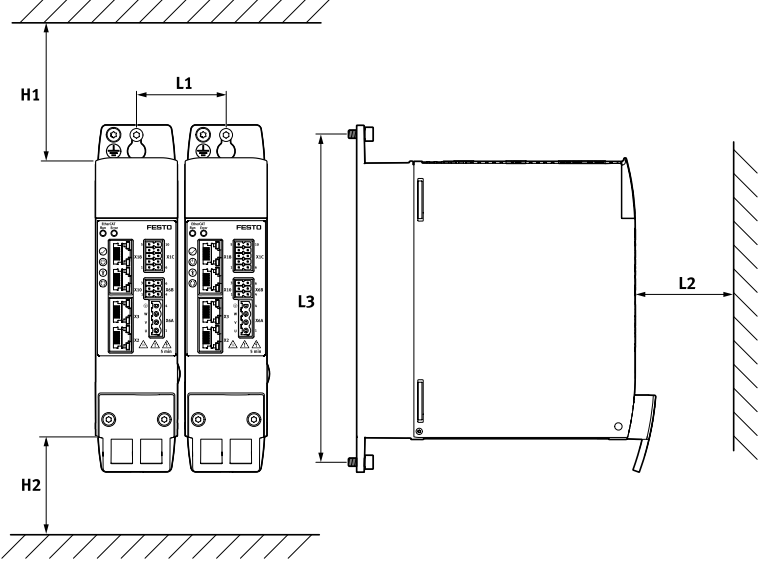


Type	H1	H2 ¹⁾	L1	L2	L3
CMMT-AS-C2-3A	70	70	52	70	200
CMMT-AS-C4-3A					
CMMT-AS-C2-11A					
CMMT-AS-C3-11A					
CMMT-AS-C5-11A					
CMMT-AS-C7-11A	100	70	62	70	230
CMMT-AS-C12-11A					
CMMT-AS-C18-11A					
CMMT-AS-C25-11A					
CMMT-AS-C12-11A	100	70	78	70	300
CMMT-AS-C18-11A					
CMMT-AS-C25-11A					
CMMT-AS-C12-11A					

1) An installation clearance of 150 mm underneath the servo drive is recommended for optimum wiring of the motor or encoder cable

Datasheet


Dimensions Download CAD data → www.festo.com

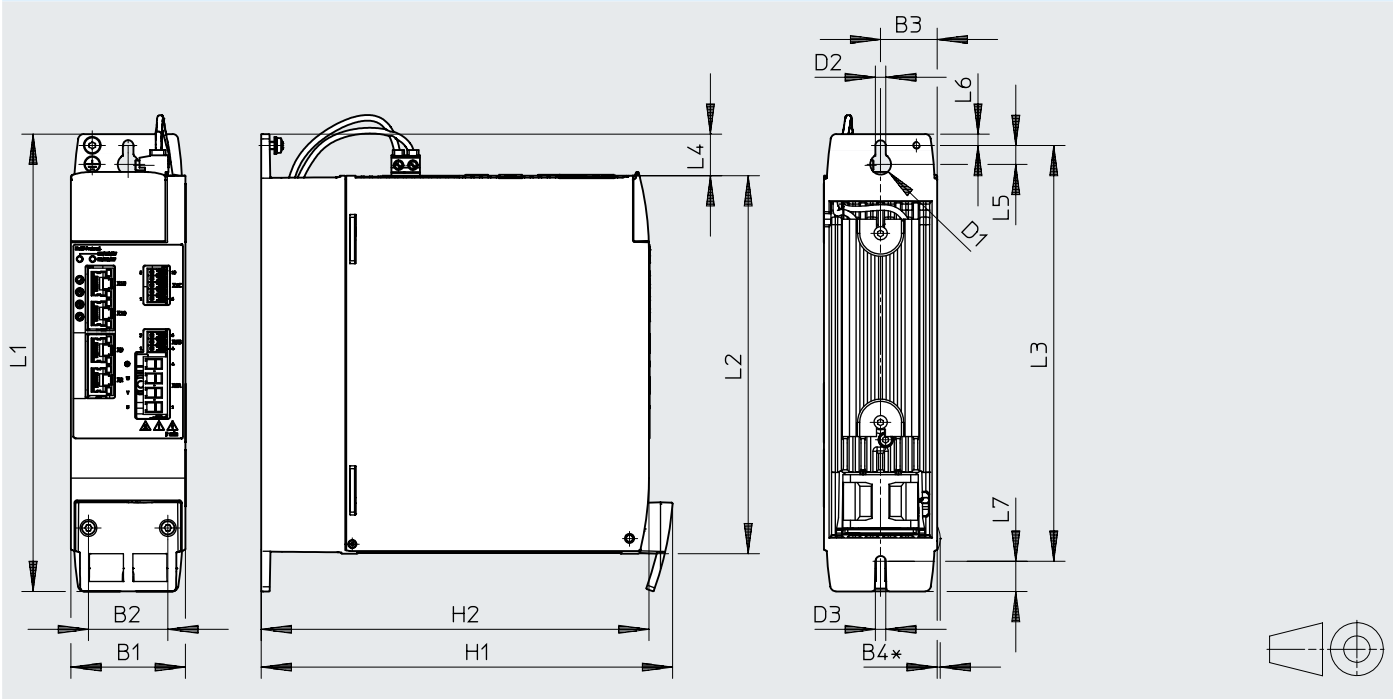


Type	B1	B2	B3	B4	D1 Ø	D2	D3	H1
CMMT-AS-C2-3A	50	34	25	–	11	5.5	5.5	183
CMMT-AS-C4-3A								
CMMT-AS-C2-11A	60	42	29.7	1.6	11	5.5	5.5	218
CMMT-AS-C3-11A								
CMMT-AS-C5-11A								
CMMT-AS-C7-11A	75	44	37.5	1.6	11	5.5	5.5	224
CMMT-AS-C12-11A								
CMMT-AS-C18-11A								
CMMT-AS-C25-11A								

Type	H2	L1	L2	L3	L4	L5	L6	L7
CMMT-AS-C2-3A	170	212	170	200	22	10	6	9
CMMT-AS-C4-3A								
CMMT-AS-C2-11A	205	242	198	220	22	10	6	16
CMMT-AS-C3-11A								
CMMT-AS-C5-11A								
CMMT-AS-C7-11A	205	319	276	300	22	10	6	13
CMMT-AS-C12-11A								
CMMT-AS-C18-11A								
CMMT-AS-C25-11A								

Datasheet

Ordering data – Standard safety					
	Description	Number of phases	Nominal current	Part no.	Type
	The assortment of plugs NEKM (a page 17) is included in the scope of delivery of the servo drive.	1-phase	2	8143163	CMMT-AS-C2-3A-MP-S1
			4	8143164	CMMT-AS-C4-3A-MP-S1
		3-phase	2	8143165	CMMT-AS-C2-11A-P3-MP-S1
			3	8143166	CMMT-AS-C3-11A-P3-MP-S1
			5	8143167	CMMT-AS-C5-11A-P3-MP-S1
			7	8143168	CMMT-AS-C7-11A-P3-MP-S1
			12	8143169	CMMT-AS-C12-11A-P3-MP-S1
			18	8157801	CMMT-AS-C18-11A-P3-MP-S1
			25	8157802	CMMT-AS-C25-11A-P3-MP-S1

Ordering information – Advanced Safety					
	Description	Number of phases	Nominal current	Part no.	Type
	The assortment of plugs NEKM (a page 17) is included in the scope of delivery of the servo drive.	1-phase	2	8151391	CMMT-AS-C2-3A-MP-S3
			4	8151392	CMMT-AS-C4-3A-MP-S3
		3-phase	2	8151393	CMMT-AS-C2-11A-P3-MP-S3
			3	8151394	CMMT-AS-C3-11A-P3-MP-S3
			5	8151395	CMMT-AS-C5-11A-P3-MP-S3
			7	8151396	CMMT-AS-C7-11A-P3-MP-S3
			12	8151397	CMMT-AS-C12-11A-P3-MP-S3
			18	8166886	CMMT-AS-C18-11A-P3-MP-S3
			25	8166887	CMMT-AS-C25-11A-P3-MP-S3

Ordering data – Modular product system

Ordering table					
Series CMMT-AS-...	-3A	-11A	Condi- tions	Code	Enter code
Module no.	5111184	5111189			
Series	CMMT			CMMT	CMMT
Motor type	AC synchronous			-AS	-AS
Nominal current					
2 A				-C2	
3 A	–		[1]	-C3	
4 A		–	[2]	-C4	
5 A	–		[1]	-C5	
7 A	–		[1]	-C7	
12 A	–		[1]	-C12	
18 A	–		[1]	-C18	
25A	–		[1]	-C25	
Nominal input voltage					
230 VAC/50-60 Hz		–		-3A	
400 VAC	–			-11A	
Number of phases					
Single-phase		–			
Three-phase	–			-P3	
Bus protocol/activation	Multiprotocol			-MP	-MP
Safety function	Standard safety			-S1	
	Advanced safety			-S3	

[1] C3, C5, C7, C12, C18, C25


Only with nominal input voltage 11A

[2] C4)

Only with nominal input voltage 3A

Accessories


Ordering data – Included in the scope of delivery of the servo drive

	Description	For CMMT-AS-...		Part no.	Type
		-3A	-11A		
Assortment of plugs					
	For single wiring connection	■	—	4325822	NEKM-C6-C16-S
	For double wiring connection	■	—	5054513	NEKM-C6-C16-D
	For single wiring connection	—	■	5119205	NEKM-C6-C45-P3-S
	For double wiring connection	—	■	5118001	NEKM-C6-C45-P3-D
	The assortment of plugs for double wiring is always supplied with the servo drive.				

Ordering data – Optional accessories



Operating panel CDSB-A1

- Text messages can be displayed in full. This allows errors, warnings and selected data to be read at a glance
 - Easy data backup of parameters and firmware in the unit for e.g. serial commissioning or device replacement
 - One operating panel can be used for several servo drives
- Control element: Touchscreen
 - Display: colour TFT
 - Display size: 1.77"
 - User memory: 3 GB
 - USB interface: USB 2.0 type mini
- Additional technical data:
→ Internet: cdsb


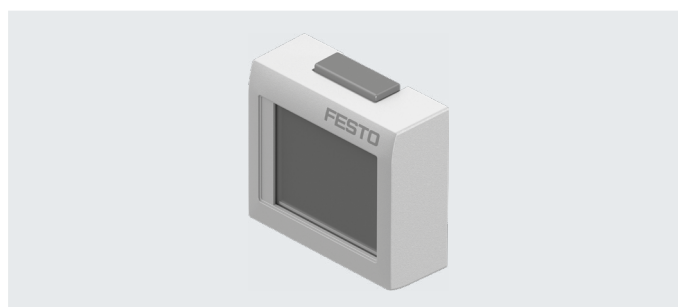



Ambient temperature [°C]	Storage temperature [°C]	Degree of protection	Weight [g]	Part no.	Type
0 ... 60	–20 ... +70	IP20	40	8070984	CDSB-A1
Not included in the scope of delivery of the servo drive					


Ordering data – Optional accessories

	Description	Part no.	Type
Connecting cable			
	- Patch cable for the daisy-chain connection of the bus interfaces X19A/B - Patch cable for master/slave functionality (X10-X11) - Ethernet category Cat 5e - Not included in the scope of delivery of the servo drive	8082383	NEBC-R3G8-KS-0.2-N-S-R3G8-ET
Mains filters			
	Single-phase, 8 A, sufficient for: 2x CMMT-AS-C2-3A or 1x CMMT-AS-C4-3A	8088928	CAMF-C6-F-C8-3A
	Single-phase, 20 A, sufficient for: 6x CMMT-AS-C2-3A or 3x CMMT-AS-C4-3A	8088929	CAMF-C6-F-C20-3A
	Three-phase, 16 A, sufficient for: 8x CMMT-AS-C2-11A or 5x CMMT-AS-C3-11A or 2x CMMT-AS-C5-11A or 2x CMMT-AS-C7-11A or 1x CMMT-AS-C12-11A	8096868	CAMF-C6-F-C16-11A
	3-phase, 42 A, sufficient for: 21x CMMT-AS-C2-11A or 14x CMMT-AS-C3-11A or 7x CMMT-AS-C5-11A or 5x CMMT-AS-C7-11A or 3x CMMT-AS-C12-11A or 1x CMMT-AS-C18-11A or 1x CMMT-AS-C25-11A	8096894	CAMF-C6-F-C42-11A
Not included in the scope of delivery of the servo drive			


Accessories


Ordering data – Optional accessories		Part no.	Type
Description			
Series inductance			
	Single-phase, 6 A, sufficient for: 2x CMMT-AS-C2-3A or 1x CMMT-AS-C4-3A	8088930	CAMF-C6-FD-C6-3A
	Three-phase, 6 A, sufficient for: 3x CMMT-AS-C2-11A or 2x CMMT-AS-C3-11A or 1x CMMT-AS-C5-11A	8096867	CAMF-C6-FD-C6-11A
Not included in the scope of delivery of the servo drive			

Ordering data – Optional accessories					Datasheets → Internet: cacr	
	Resistance value [Ω]	Nominal power at 380 V [W]	Pulse energy at 380 V [Ws]	Part no.	Type	
Braking resistor						
						
For type CMMT-AS-						
C2-3A	C4-3A					
–	■	72	150	2000	1336611 CACR-LE2-72-W500	
■	■	100	150	2000	1336615 CACR-LE2-100-W500	
–	■	67	720	10800	1336617 CACR-KL2-67-W1800	
■	■	100	720	10800	8091545 CACR-KL2-100-W1800	
Not included in the scope of delivery of the servo drive						

Ordering data – Optional accessories					Datasheets → Internet: cacr				
					Resistance value	Nominal power at 780 V	Pulse energy at 780 V	Part no.	Type
					[Ω]	[W]	[Ws]		
Braking resistor									
									
For type CMMT-AS-									
C2-11A	C3-11A	C5-11A	C7-11A	C12-11A					
–	–	–	–	■	50	120	1800	2882342	CACR-LE2-50-W500
–	–	–	■	–	72	120	1800	1336611	CACR-LE2-72-W500
–	–	■	–	–	100	120	1800	1336615	CACR-LE2-100-W500
■	■	–	–	–	240	120	1800	8091543	CACR-LE2-240-W500
–	–	–	–	■	40	480	7200	2882343	CACR-KL2-40-W2000
–	–	–	■	–	67	720	10800	1336617	CACR-KL2-67-W1800
■	■	–	–	–	240	720	10800	8091544	CACR-KL2-240-W1800
–	–	■	–	–	100	720	10800	8091545	CACR-KL2-100-W1800
Not included in the scope of delivery of the servo drive									

Accessories

Ordering data – Optional accessories					Datasheets → Internet: cacr	
	Resistance value	Nominal power at 780 V	Pulse energy at 780 V	Part no.	Type	
	[Ω]	[W]	[Ws]			
Braking resistor						
						
For type CMMT-AS-						
C18-11A	C25-11A					
■	–	40	480	7200	2882343 CACR-KL2-40-W2000	
–	■	21	1440	21600	8140961 CACR-KL2-21-W3600	
Not included in the scope of delivery of the servo drive						

Ordering data – Optional accessories				
	Description	Part no.	Type	
Adapter				
	Required in combination with the linear drives EGC-...-M1/M2, ELGA-...-M1/M2 or ELCC-...-M1 (external displacement encoder) as adapter between encoder cable NEBM-M12G8-...-V3 and interface X3 (position encoder 2)	8106112	NEFM-S1G9-K-0.5-R3G8	
Not included in the scope of delivery of the servo drive				

Ordering data – Optional accessories					
	Description	For CMMT-AS-		Part no.	Type
		C2/C4 -...-3A	C2/C3/C5 -...-11A	C7/C12/ C18/C25 -...-11A	
Blanking plate					
	- Used to cover the connections if no operating panel is used - Included in the scope of delivery of the servo drive	■	■	■	5395254 CAFC-C6-C
Shield clamp					
	- For fitting the shield and strain relief for the motor cable - Included in the scope of delivery of the servo drive	■	–	–	5326867 CAMA-C6-SK-S2
		–	■	–	5335956 CAMA-C6-SK-S3
		–	–	■	8114689 CAMA-C6-SK-S4