


AC2264



AS-Interface control cabinet module

SmartLine25 4DI 3DO T C

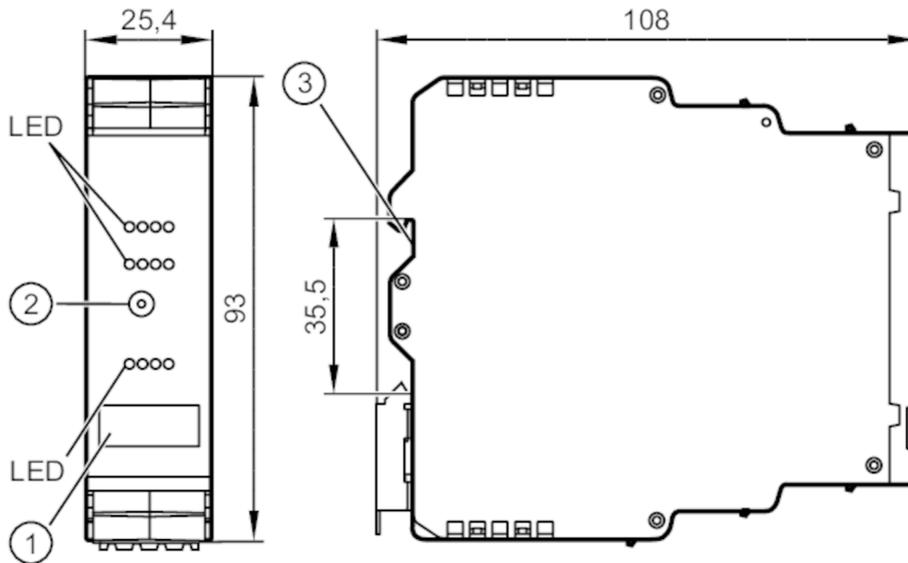

- 1 panel for labelling
- 2 addressing socket
- 3 DIN rail adapter



Application

Application: Installation in control cabinets

Electrical data

Operating voltage [V]	26.5...31.6 DC
Max. current consumption from AS-i [mA]	250
Additional voltage supply [V]	20...30 DC
Max. current consumption from additional supply [mA]	3000; (AUX)
Integrated watchdog	yes

Inputs / outputs

Number of inputs and outputs: Number of digital inputs: 4; Number of digital outputs: 3

Inputs

Number of digital inputs	4
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs	AS-i
Power supply [V]	18...30; (DC)
Max. total current rating of inputs [mA]	200
Input current High [mA]	6...10



AS-Interface control cabinet module

SmartLine25 4DI 3DO T C

Input current Low	[mA]	0...2
Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes

Outputs

Number of digital outputs		3
Circuit		PNP
Voltage range DC	[V]	20...30; (AUX)
Max. current load per output	[mA]	1000; (utilisation category DC-12: 700 mA; utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))
Max. current load outputs total	[A]	3
Short-circuit proof		yes
Electrically separated		yes
Actuator supply outputs		AUX

Operating conditions

Ambient temperature	[°C]	-25...70
Note on ambient temperature		the derating of the current load indicated in the operating instructions is to be taken into account at the following ambient temperature: > 60 °C
Max. relative air humidity	[%]	90; (non condensing)
Max. height above sea level	[m]	2000
Protection		IP 20
Pollution degree		2

Tests / approvals

EMC	EN 61000-6-2	
	EN 62026-2	
	EN 50581	
MTTF	[years]	182
Notes		The device shall be supplied from an isolating source.; This voltage source must have a secondary UL-listed fuse (see enclosed sheet).; Alternatively, a class 2 power supply can be used to supply AUX.

AS-i classification

AS-i version		2.11; 3.0															
AS-i addressing		addressing socket															
Extended addressing mode		yes															
AS-i master profile		M2; M3; M4															
AS-i profile		S-7.A.E															
AS-i I/O configuration	[hex]	7															
AS-i ID code	[hex]	A.E															
AS-i certificate		60701															
Assignment of the data bits		<table border="1"> <thead> <tr> <th>data bit</th> <th>D0</th> <th>D1</th> <th>D2</th> <th>D3</th> </tr> </thead> <tbody> <tr> <td>input</td> <td>I-1</td> <td>I-2</td> <td>I-3</td> <td>I-4</td> </tr> <tr> <td>Output</td> <td>O-1</td> <td>O-2</td> <td>O-3</td> <td>-</td> </tr> </tbody> </table>	data bit	D0	D1	D2	D3	input	I-1	I-2	I-3	I-4	Output	O-1	O-2	O-3	-
data bit	D0	D1	D2	D3													
input	I-1	I-2	I-3	I-4													
Output	O-1	O-2	O-3	-													

Mechanical data

Weight	[g]	146
Housing		housing for DIN rail mounting

AC2264



AS-Interface control cabinet module

SmartLine25 4DI 3DO T C

Type of mounting	mounting on DIN rail
Dimensions [mm]	93 x 25.4 x 108
Materials	PC-GF20

Displays / operating elements

Display	switching status	LED, yellow I1...I4, O1...O3
	operation	LED, green AS-i, AUX
	errors	LED, red

Accessories

Accessories (optional)	connectors
------------------------	------------

Remarks

Remarks	Do not connect any of the following points to an external potential: I-, I+, I1, I2, I3, I4
	The connections are electrically connected with the AS-i cable.
Pack quantity	1 pcs.

Electrical connection

pin header:

Connection

I-	I-	I-	I-
I1	I2	I3	I4
I+	I+	I+	I+

O-	O-	O-	O-
O1	O2	O3	
A+	A-	E+	E-

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24V
I-	Sensor supply 0V
E+	actuator supply +24V
E-	actuator supply 0V
I1...I4	switching input sensor 1...4
O1...O3	switching output actuator 1...3
O-	switching output actuator 0V