

# X20(c)IF10X0

Data sheet  
1.22 (February 2025)



## **Publishing information**

B&R Industrial Automation GmbH

B&R Strasse 1

5142 Eggelsberg

Austria

Telephone: +43 7748 6586-0

Fax: +43 7748 6586-26

[office@br-automation.com](mailto:office@br-automation.com)

## **Disclaimer**

All information in this document is current as of its creation. The contents of this document are subject to change without notice. B&R Industrial Automation GmbH assumes unlimited liability in particular for technical or editorial errors in this document only (i) in the event of gross negligence or (ii) for culpably inflicted personal injury. Beyond that, liability is excluded to the extent permitted by law. Liability in cases in which the law stipulates mandatory unlimited liability (such as product liability) remains unaffected. Liability for indirect damage, consequential damage, business interruption, loss of profit or loss of information and data is excluded, in particular for damage that is directly or indirectly attributable to the delivery, performance and use of this material.

B&R Industrial Automation GmbH notes that the software and hardware designations and brand names of the respective companies used in this document are subject to general trademark, brand or patent protection.

Hardware and software from third-party suppliers referenced in this document is subject exclusively to the respective terms of use of these third-party providers. B&R Industrial Automation GmbH assumes no liability in this regard. Any recommendations made by B&R Industrial Automation GmbH are not contractual content, but merely non-binding information for which no liability is assumed. When using hardware and software from third-party suppliers, the relevant user documentation of these third-party suppliers must additionally be consulted and, in particular, the safety guidelines and technical specifications contained therein must be observed. The compatibility of the products from B&R Industrial Automation GmbH described in this document with hardware and software from third-party suppliers is not contractual content unless this has been separately agreed in individual cases; in this respect, warranty for such compatibility is excluded in any case, and it is the sole responsibility of the customer to verify this compatibility in advance.

## **Version history**

B&R makes every effort to keep documents as current as possible. The most current versions are available for download on the B&R website ([www.br-automation.com](http://www.br-automation.com)).

# 1 General information

## 1.1 Other applicable documents

For additional and supplementary information, see the following documents.

### Other applicable documents

| Document name | Title                                    |
|---------------|--|
| MAX20         | <a href="#">X20 System user's manual</a> |

### Additional documentation

| Document name | Title  |
|---------------|--|
| MAREDSYS      | <a href="#">Redundancy for control systems</a> |

## 1.2 Coated modules

Coated modules are X20 modules with a protective coating for the electronics component. This coating protects X20c modules from condensation and corrosive gases.

The modules' electronics are fully compatible with the corresponding X20 modules.



For simplification purposes, only images and module IDs of uncoated modules are used in this data sheet.

The coating has been certified according to the following standards:

- Condensation: BMW GS 95011-4, 2x 1 cycle
- Corrosive gas: EN 60068-2-60, method 4, exposure 21 days



## 1.3 Order data

| Order number | Short description  | Figure |
|--------------|--|--------|
|              | <b>X20 interface module communication</b>  |        |
| X20IF10X0    | X20 interface module, 1 redundancy link interface 1000BASE-SX, controller-controller data synchronization module for controller redundancy         |        |
| X20cIF10X0   | X20 interface module, coated, 1 redundancy link interface 1000BASE-SX, controller-controller data synchronization module for controller redundancy |        |

Table 1: X20IF10X0, X20cIF10X0 - Order data

## 1.4 Module description

Interface module for redundant operation of controllers.

- Controller-Controller data synchronization module for controller redundancy system

## 2 Technical description

### 2.1 Technical data


| Order number   | X20IF10X0   | X20cIF10X0 |
|--|---|------------|
| Short description  |   |            |
| Communication module   | Controller redundancy link module   |            |
| General information  |   |            |
| B&R ID code  | 0xC3B4  | 0xE239     |
| Status indicators  | Module status, bus function   |            |
| Diagnostics  |   |            |
| Module status  | Yes, using LED status indicator and software  |            |
| Bus function   | Yes, using LED status indicator and software  |            |
| Data transfer  | Yes, using LED status indicator and software  |            |
| Power consumption  | 1.93 W  |            |
| Additional power dissipation caused by actuators (resistive) [W] | -   |            |
| Certifications   |   |            |
| CE   | Yes   |            |
| UKCA   | Yes   |            |
| ATEX   | Zone 2, II 3G Ex nA nC IIA T5 Gc<br>IP20, Ta (see X20 user's manual)<br>FTZÜ 09 ATEX 0083X  |            |
| UL   | cULus E115267<br>Industrial control equipment   |            |
| HazLoc   | cCSAus 244665<br>Process control equipment<br>for hazardous locations<br>Class I, Division 2, Groups ABCD, T5                             |            |
| DNV  | Temperature: <b>B</b> (0 to 55°C)<br>Humidity: <b>B</b> (up to 100%)<br>Vibration: <b>B</b> (4 g)<br>EMC: <b>B</b> (bridge and open deck) |            |
| CCS  | Yes   | -          |
| LR   | ENV1  |            |
| ABS  | Yes   |            |
| BV   | <b>EC33B</b><br>Temperature: 5 - 55°C<br>Vibration: 4 g<br>EMC: Bridge and open deck  |            |
| KC   | Yes   | -          |
| Interfaces   |   |            |
| Fieldbus   | Redundancy link   |            |
| Standard (compliance)  | IEEE Std 802.3, 2002 edition, clause 38   |            |
| Variant  | 1x duplex LC  |            |
| Transfer rate  | 1 Gbit/s  |            |
| Transfer   |   |            |
| Physical layer   | 1000BASE-SX   |            |
| Wave length  | 850 nm  |            |
| Cable fiber type   | Multimode fiber with 62.5/125 µm or 50/125 µm core diameter<br>LC connector on both sides   |            |
| Line length  |   |            |
| MMF 50/125 µm  | Min.: 2 m, max.: Up to 500 m  |            |
| MMF 62.5/125 µm  | Min.: 2 m, max.: Up to 300 m  |            |
| Operating conditions   |   |            |
| Mounting orientation   |   |            |
| Horizontal   | Yes   |            |
| Vertical   | Yes   |            |
| Installation elevation above sea level                           |   |            |
| 0 to 2000 m  | No limitation   |            |
| >2000 m  | Reduction of ambient temperature by 0.5°C per 100 m   |            |
| Degree of protection per EN 60529                                | IP20  |            |

Table 2: X20IF10X0, X20cIF10X0 - Technical data

| Order number                    | X20IF10X0                     |                        | X20cIF10X0                     |
|---------------------------------|-------------------------------|------------------------|--------------------------------|
| Ambient conditions              |                               |                        |                                |
| Temperature                     |                               |                        |                                |
| Operation                       |                               |                        |                                |
| Horizontal mounting orientation | -25 to 60°C                   |                        |                                |
| Vertical mounting orientation   | -25 to 50°C                   |                        |                                |
| Derating                        | See section "Derating".       |                        |                                |
| Storage                         | -40 to 85°C                   |                        |                                |
| Transport                       | -40 to 85°C                   |                        |                                |
| Relative humidity               |                               |                        |                                |
| Operation                       | 5 to 85%, non-condensing      | Up to 100%, condensing |                                |
| Storage                         | 5 to 85%, non-condensing      |                        |                                |
| Transport                       | 5 to 85%, non-condensing      |                        |                                |
| Mechanical properties           |                               |                        |                                |
| Slot                            | Left IF slot of X20CP368x PLC |                        | Left IF slot of X20cCP368x PLC |


Table 2: X20IF10X0, X20cIF10X0 - Technical data

## 2.2 Operating and connection elements

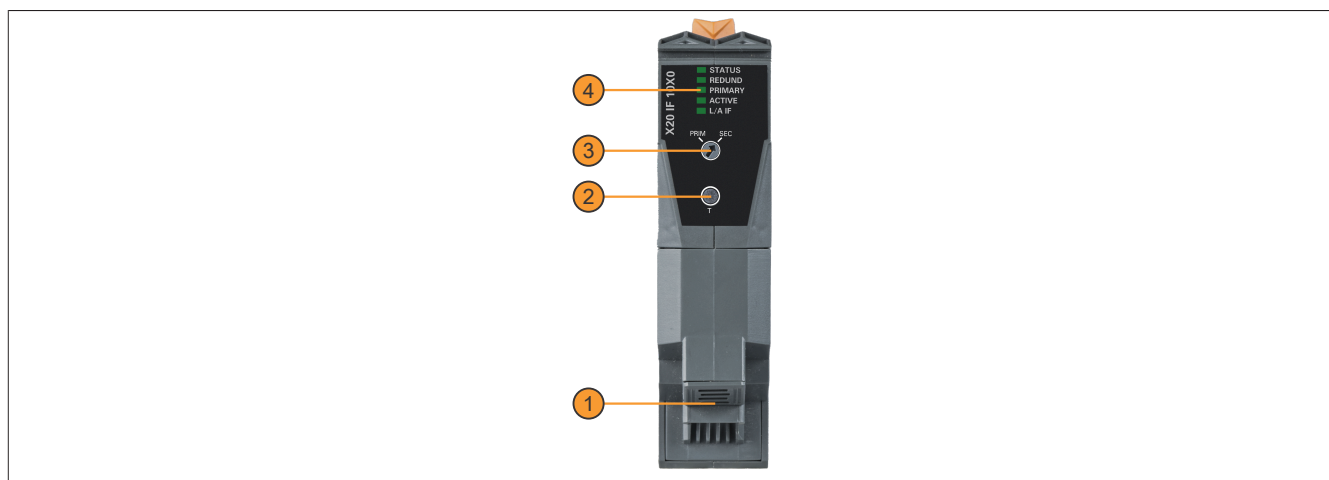


|   |  |   |                       |
|---|--|---|-----------------------|
| 1 | Ethernet connection with duplex LC interface | 2 | Button                |
| 3 | Primary/Secondary controller selector switch | 4 | LED status indicators |

## 2.2.1 LED status indicators


| Figure  | LED                   | Color | Status       | Description   |
|---|-----------------------|-------|--------------|---|
|  <p>X20 IF 10X0</p> <p>STATUS<br/>REDUND<br/>PRIMARY<br/>ACTIVE<br/>L/A IF</p> <p>PRIM SEC</p> | STATUS <sup>1)</sup>  | Green | On           | Interface module active   |
|   |                       | Red   | Blinking     | The controller is starting up.  |
|   | REDUND <sup>1)</sup>  | Green | On           | A bumpless switchover of the controller is possible.  |
|   |                       |       | Blinking     | A minor bump switchover of the controller is possible.  |
|   |                       |       | Double flash | A major bump switchover of the controller is possible.  |
|   |                       |       | Flickering   | Application synchronization in progress   |
|   | PRIMARY <sup>1)</sup> | Red   | On           | A switchover not possible of the controller is not possible. No distinction is made here as to whether a switchover is only temporarily not possible or whether switching over is permanently not possible. |
|   |                       |       | On           | The redundant controller is the primary controller.   |
|   |                       |       | Off          | The redundant controller is the secondary controller.   |
|   | ACTIVE                | Green | On           | The redundant controller has active control of the process.   |
|   |                       |       | Off          | The redundant controller is not active.   |
|   | L/A IF <sup>1)</sup>  | Green | On           | Connection established to redundancy partner  |
|   |                       |       | Blinking     | Redundancy link active. Data traffic is taking place for synchronization purposes.  |
|   |                       | Red   | On           | No connection to redundancy partner   |

1) This LED is a green/red dual LED.

### LEDs - Blink times

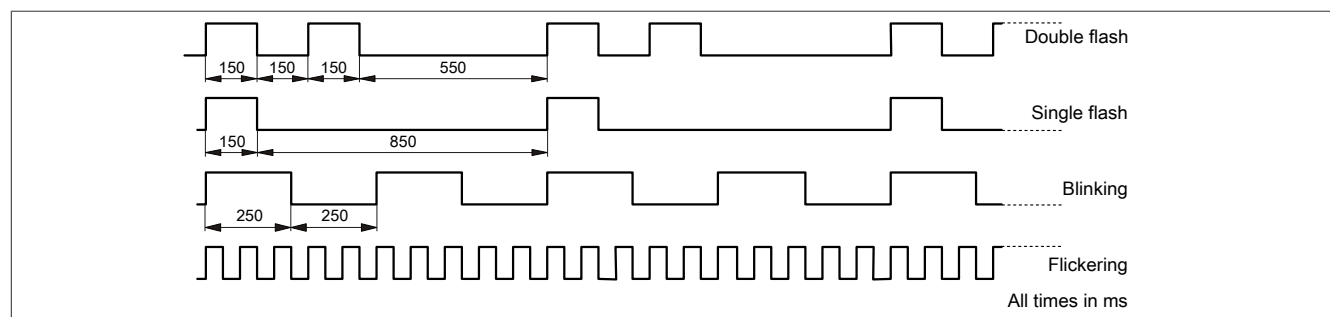

## 2.2.2 Switch positions

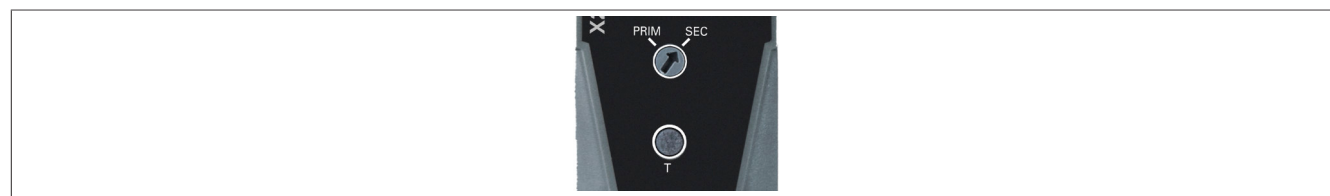

Selector switch "PRIM SEC" can be used to set the controller as a primary or secondary controller.

When configuring, it is important to ensure that one controller is configured as primary and the other controller as secondary.



### Information:

**It is not permitted to change the switch position during operation.**

The "T" button is used for redundancy switchovers and manually synchronizing the application.

## 2.3 Derating

The temperatures specified in the technical data apply to operation in the left IF slot of X20CP368x controllers.

When operated in the IF slot of X20CP168x controllers, the maximum temperature specifications are reduced by 5°C.

## 3 Commissioning

---

### 3.1 Firmware

The module comes with preinstalled firmware. The firmware is part of the Automation Studio project. The module is automatically brought up to this level.

A hardware upgrade must be performed to upgrade the firmware included in Automation Studio (see Help "Project management - Workspace - Upgrades" in Automation Help).