

## Features

- 3-wire or 4-wire connection (with or without neutral).
- Optionally monitors upper and lower voltage & frequency in 3-phase circuits.
- Allows monitoring of phase sequence, failure and asymmetry incl. neutral fail (only in 4-wire connection).
- The device is supplied from monitored voltage.
- Both output contacts can be set individually.
- Measures real effective value of AC voltage (True RMS).
- Optional response delay of the output contact to the measured fault state or transition from the fault state to the OK state incl. delayed response of output contacts after connecting the power supply.
- Possibility of automatic or manual transition from fault state (memory).
- Optional closing or opening of the output contact when measuring a fault state (Fail Safe / Non Fail Safe).
- Password protection against unauthorized changes to settings.
- Digital backlit display with the possibility of monitoring the current state of the network, incl. possible failures.
- The last five fault states are stored in a history that can be viewed retrospectively.
- Sealable transparent cover for display and controls.

## RS PRO Family Name

0766925 RS PRO



RS PRO is the own brand of RS. The RS PRO Seal of Approval is your assurance of professional quality, a guarantee that every part is rigorously tested, inspected, and audited against demanding standards. Making RS PRO the Smart Choice for our customers.

## Product description

- 3-wire or 4-wire connection (with or without neutral).
- Optionally monitors upper and lower voltage & frequency in 3-phase circuits.
- Allows monitoring of phase sequence, failure and asymmetry incl. neutral fail (only in 4-wire connection).
- The device is supplied from monitored voltage.
- Both output contacts can be set individually.
- Measures real effective value of AC voltage (True RMS).
- Optional response delay of the output contact to the measured fault state or transition from the fault state to the OK state incl. delayed response of output contacts after connecting the power supply.
- Possibility of automatic or manual transition from fault state (memory).
- Optional closing or opening of the output contact when measuring a fault state (Fail Safe / Non Fail Safe).
- Password protection against unauthorized changes to settings.
- Digital backlit display with the possibility of monitoring the current state of the network, incl. possible failures.
- The last five fault states are stored in a history that can be viewed retrospectively.
- Sealable transparent cover for display and controls.

## Supply

|                             |                                                                     |
|-----------------------------|---------------------------------------------------------------------|
| Supply monitored terminals: | L1-L2-L3 (N)                                                        |
| Supply/monitored voltage:   | ULN = 3 ~ 90 – 288 V (45-65 Hz)<br>ULL = 3 ~ 155 – 500 V (45-65 Hz) |
| Consumption (max.):         | 5 VA                                                                |

## Measuring circuit

|                                                       |                                                                   |
|-------------------------------------------------------|-------------------------------------------------------------------|
| Selection of the measured circuit:                    | Phase voltage - 3 phase, 4 wire<br>Line voltage - 3 phase, 3 wire |
| Adjustable upper (OV) and lower (UV) voltage levels:  | Phase voltage: 90 – 288 VAC<br>Line voltage: 155 – 500 VAC        |
| Upper (HC) / lower (LC) limit voltage:                | Phase voltage: 310 VAC / 85 VAC<br>Line voltage: 535 VAC / 150 VA |
| Adjustable upper (OF) and lower (UF) frequency level: | 45 – 65 Hz                                                        |

|                                                            |                                                                               |
|------------------------------------------------------------|-------------------------------------------------------------------------------|
| Adjustable asymmetry:                                      | Absolute: 5 – 99 VAC<br>Percentage: 2 – 50 %                                  |
| Adjustable voltage and frequency hysteresis level:         | 3 – 20 VAC (OV, UV, HC, LC)<br>0.5 – 2 Hz (OF, UF)                            |
| Adjustable hysteresis asymmetry:                           | Absolute: 3 – 99 VAC<br>Percentage: 2 – 15 %                                  |
| Accuracy of measured voltage:                              | +/- 5 V                                                                       |
| Accuracy of measured frequency:                            | +/- 0.3 Hz                                                                    |
| Adjustable delay after supply connection P <sub>on</sub> : | 0 – 999 s<br>(HW initialization 250 ms)                                       |
| Adjustable delay T <sub>on</sub> :                         | 0.5 – 999 s                                                                   |
| Adjustable delay T <sub>off</sub> :                        | 0.1 – 999 s                                                                   |
| Fixed delay:                                               | <100 ms (phase sequence, failure)<br><200 ms (HC, LC), <500 ms (neutral fail) |

## Output


|                           |                                     |
|---------------------------|-------------------------------------|
| Contact type:             | 2× changeover (AgSnO <sub>2</sub> ) |
| Current rating:           | 5 A/AC1                             |
| Breaking capacity:        | 1200 VA/AC1, 150 W/DC1              |
| Switching voltage:        | 240 V AC/30 V DC                    |
| Power dissipation (max.): | 5 W                                 |
| Mechanical life:          | 10.000.000 ops.                     |
| Electrical life (AC1):    | 100.000 ops.                        |

## Other information

|                        |                                                      |
|------------------------|------------------------------------------------------|
| Operating temperature: | –10 .. +60 °C (14 .. 140 °F)                         |
| Storage temperature:   | –20 .. +70 °C (–4 .. 158 °F)                         |
| Dielectric strength:   | AC 4 kV (supply – output)                            |
| Operating position:    | any                                                  |
| Mounting:              | DIN rail EN 60715                                    |
| Protection degree:     | IP20 housing & terminals/IP40 front panel with cover |
| Overvoltage category:  | III.                                                 |
| Pollution degree:      | 2                                                    |


|                                                                          |                                              |
|--------------------------------------------------------------------------|----------------------------------------------|
| Cross-wire section – solid/<br>stranded with ferrule (mm <sup>2</sup> ): | max. 1× 2.5, 2× 1.5/<br>max. 1× 2.5 (AWG 12) |
| Dimensions:                                                              | 90 × 36 × 66.5 mm (3.6" × 1.5" × 2.7")       |
| Weight:                                                                  | 132 g (4.7 oz)                               |
| Standards:                                                               | EN 60255-1, EN 60255-26, EN 60255-27         |

## Description

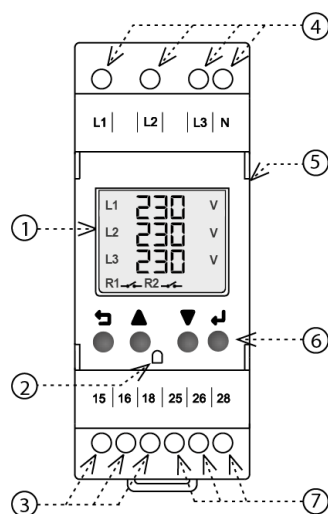

1. Backlit display
2. Place for sealing
3. Output contact RL1 (15-16-18)
4. Supply/monitored voltage terminals (L1-L2-L3-N)
5. Transparent opening cover
6. Control buttons
7. Output contact RL2 (25-26-28)


## Description of display

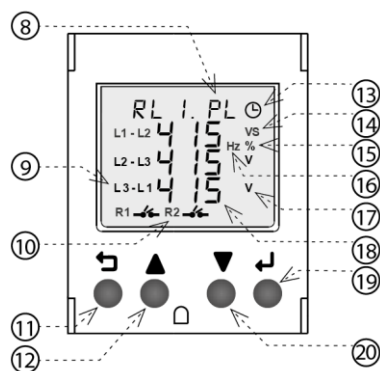

8. Fault status window and function menu in settings
9. Indication of phase or line voltage
10. Status of output contacts RL1 and RL2
11. ESCAPE button
12. UP button – ▲
13. Indication of a running delay
14. Delay in seconds
15. Asymmetry in percent
16. Frequency in hertz
17. Voltage in volts
18. Current state of voltage or other configurable parameter
19. ENTER button
20. DOWN button ▼

## Function

## Overvoltage - undervoltage

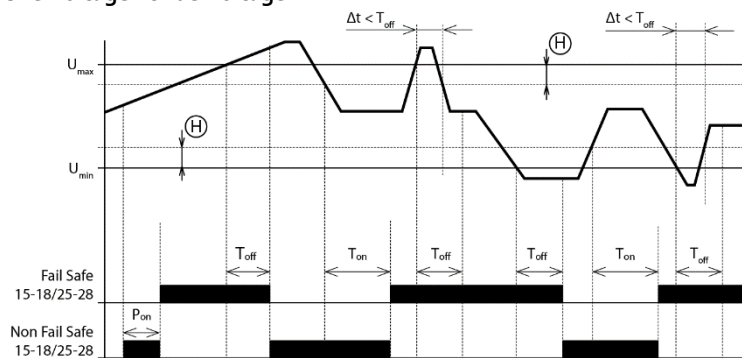

### Graph legend:

$P_{on}$  - Power ON delay (delay after power supply connection)  
 $P_{on} = 0 - 999 \text{ s}$  (min. 250 ms hardware initialization)  
 $T_{on}$  - ON Delay (delay to OK state)  
 $T_{on} = 0,5 - 999 \text{ s}$   
 $T_{off}$  - OFF delay (delay to fault state)  
 $T_{off} = 0,1 - 999 \text{ s}$   
 $T_{off}$  - Adjustable for OV, UV, OF, UF & asymmetry faults  
 $T_{off}$  - Phase sequence, failure <100ms;  
 Neutral fail <500ms

$\Delta t$  - Duration of the fault state

(H) Hysteresis

After the supply/monitored voltage is connected, the delay  $P_{on}$  starts timing - during the timing the output contact is in a fault state - in the FAIL SAFE mode it is open. After the delay, if the monitored voltage is in the range  $U_{min} \dots U_{max}$ , the output contact closes.

If the monitored voltage exceeds the set value  $U_{max}$ , the time delay to the fault state ( $T_{off}$ ) starts. After the delay, the output contact opens.

If the monitored voltage falls below the  $U_{max}$  value reduced by the set hysteresis, the time delay start to OK state ( $T_{on}$ ). After the delay, the output contact closes.


If the duration of the fault state ( $\Delta t$ ) is shorter than the set value  $T_{off}$ , the status of the output contact does not change.

If the monitored voltage falls below the value  $U_{min}$ , the time delay to the fault state ( $T_{off}$ ) starts. After the delay, the output contact opens.

If the monitored voltage exceeds the value  $U_{min}$  increased by the set hysteresis, the time delay start to the OK state ( $T_{on}$ ). After the delay, the output contact closes.

If the duration of the fault state ( $\Delta t$ ) is shorter than the set value ( $T_{off}$ ), the status of the output contact does not change.

## Phase sequence

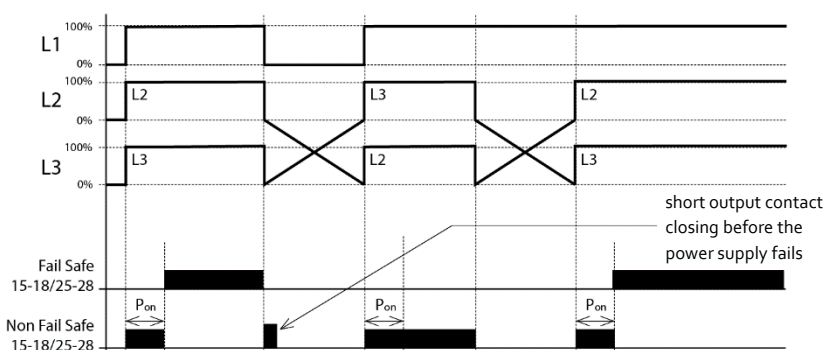


### Graph legend:

$P_{on}$  - Power ON delay (delay after power supply connection)  
 $P_{on} = 0 - 999 \text{ s}$  (min. 250 ms hardware initialization)

After the supply/monitored voltage is connected, the delay  $P_{on}$  starts timing - during the timing the output contact is in a fault state - in FAIL SAFE mode it is open. After the delay, if the phase sequence is correct, the output contact closes.

If the phase sequence is incorrect after the  $P_{on}$  delay, the output contact remains open (fault state).

## Asymmetry, phase failure

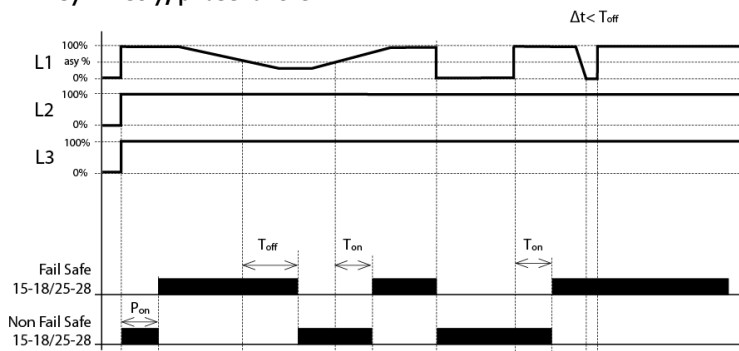

### Graph legend:

$P_{on}$  - Power ON delay (delay after power supply connection)  
 $P_{on} = 0 - 999$  s (min. 250 ms hardware initialization)  
 $T_{on}$  - ON Delay (delay to OK state)  
 $T_{on} = 0,5 - 999$  s  
 $T_{off}$  - OFF delay (delay to fault state)  
 $T_{off} = 0,1 - 999$  s  
 $T_{off}$  - Adjustable for OV, UV, OF, UF & asymmetry faults  
 $T_{off}$  - Phase sequence, failure <100ms;  
 Neutral fail <500ms  
 $\Delta t$  - Duration of the fault state

After the supply/monitored voltage is connected, the delay  $P_{on}$  starts timing - during the timing the output contact is in a fault state - in the FAIL SAFE mode it is open. After the delay, if the phase asymmetry is lower than the set value (absolute or percentage), the output contact closes.

If the phase asymmetry exceeds the set value, the time delay to the fault state ( $T_{off}$ ) begins. After the delay, the output contact opens.

If the phase asymmetry falls below the set value, the time delay starts to OK state ( $T_{on}$ ). After the delay, the output contact closes.

If the duration of the fault state ( $\Delta t$ ) is shorter than the set value  $T_{off}$ , the status of the output contact does not change.

If a phase failure occurs, the time delay to the fault state ( $T_{off}$ ) begins. After the delay, the output contact opens.

If the phase failure resumes, the time delay starts to OK state ( $T_{on}$ ). After the delay, the output contact closes.

If the duration of the fault state ( $\Delta t$ ) is shorter than the set value  $T_{off}$ , the status of the output contact does not change.