## **SIEMENS**

Data sheet 3RF2150-1AA45



Semiconductor relay, 1-phase 3RF2 Overall width 22.5 mm, 50 A 48-600 V / 4-30 V DC screw terminal Blocking voltage 1200 V

product designation  design of the product  product type designation  annufacturer's article number  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _1 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _6 the accessories that can be ordered  • _5 of the accessories that can be ordered  • _6 the the thick that the
product type designation  manufacturer's article number  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  3RF2900-3PA88  • _2 of the accessories that can be ordered  3RF2900-0EA18  • _3 of the accessories that can be ordered  3RF2900-0EA18  • _4 of the accessories that can be ordered  3RF2920-0FA08  product designation  • _1 of the accessories that can be ordered  • _2 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _3 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _4 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _5 of the accessories that can be ordered  • _6 of the accessories that can be ordered  product function  zero-point switching  66 VA  power loss [V-A] maximum  66 VA  power loss [W] for rated value of the current  • at AC in hot operating state
manufacturer's article number
<ul> <li>_ 1 of the accessories that can be ordered</li> <li>_ 2 of the accessories that can be ordered</li> <li>_ 3 of the accessories that can be ordered</li> <li>_ 4 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 7 of the accessories that can be ordered</li> <li>_ 8 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 2 of the accessories that can be ordered</li> <li>_ 3 of the accessories that can be ordered</li> <li>_ 4 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 6 of the accessories that can be ordered</li> <li>_ 7 of the accessories that can be ordered</li> <li>_ 8 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 9 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 1 of th</li></ul>
<ul> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_7 of the accessories that can be ordered</li> <li>_8 F2920-0FA08</li> </ul> product designation <ul> <li>_1 of the accessories that can be ordered</li> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_6 of the accessories that can be ordered</li> </ul> General technical data product function <ul> <li>_2 zero-point switching</li> <li>_6 of VA</li> </ul> <li>power loss [W] for rated value of the current</li> <li>_ at AC in hot operating state</li> <li>_ 6 of W</li>
<ul> <li>_ 3 of the accessories that can be ordered</li> <li>_ 4 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 2 of the accessories that can be ordered</li> <li>_ 3 of the accessories that can be ordered</li> <li>_ 3 of the accessories that can be ordered</li> <li>_ 4 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 66 VA</li> <li>power loss [V·A] maximum</li> <li>_ 66 VA</li> <li>_ 66 W</li> </ul>
<ul> <li>_ 4 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 7 of the accessories that can be ordered</li> <li>_ 1 of the accessories that can be ordered</li> <li>_ 2 of the accessories that can be ordered</li> <li>_ 3 of the accessories that can be ordered</li> <li>_ 4 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 5 of the accessories that can be ordered</li> <li>_ 6 ovaluation</li> <li>_ 5 ovaluation</li> <li>_ 6 ovaluation</li> <li>_ 5 ovaluation</li> <li>_ 6 ovaluation</li> <li>_ 5 ovaluation</li> <li>_ 5 ovaluation</li> <li>_ 5 ovaluation</li> <li>_ 6 ovaluation</li> <li>_ 5 ovaluation</li> <li>_ 6 ovaluation</li> <li>_ 7 ovaluation</li> <li>_ 7 ovaluation</li> <li>_ 7 ovaluation</li> <li>_ 7 ovaluation</li> <li>_</li></ul>
_ 5 of the accessories that can be ordered  product designation      _ 1 of the accessories that can be ordered     _ 2 of the accessories that can be ordered     _ 3 of the accessories that can be ordered     _ 3 of the accessories that can be ordered     _ 4 of the accessories that can be ordered     _ 5 of the accessories that can be ordered     _ 5 of the accessories that can be ordered     _ 5 of the accessories that can be ordered  product function  product function  zero-point switching  power loss [V-A] maximum  66 VA  power loss [W] for rated value of the current     _ at AC in hot operating state  66 W
product designation  • _1 of the accessories that can be ordered terminal cover  • _2 of the accessories that can be ordered power regulator  • _3 of the accessories that can be ordered converter  • _4 of the accessories that can be ordered load monitoring  • _5 of the accessories that can be ordered load monitoring, basis  General technical data  product function zero-point switching  power loss [V-A] maximum 66 VA  power loss [W] for rated value of the current  • at AC in hot operating state 66 W
<ul> <li>_1 of the accessories that can be ordered</li> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_6 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_6 ordere</li></ul>
<ul> <li>_2 of the accessories that can be ordered</li> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>_6 of the accessories that can be ordered</li> <li>_6 of the accessories that can be ordered</li> <li>_6 or the accessories that can be ordered</li> <li>_7 or the accessories that can be ordered</li> <li>_8 or the accessories that can be ordered</li> <li>_9 or the accessories that can be ordered</li> &lt;</ul>
<ul> <li>_3 of the accessories that can be ordered</li> <li>_4 of the accessories that can be ordered</li> <li>_5 of the accessories that can be ordered</li> <li>load monitoring</li> <li>load monitoring, basis</li> </ul> General technical data product function <ul> <li>zero-point switching</li> <li>power loss [V·A] maximum</li> <li>66 VA</li> </ul> power loss [W] for rated value of the current <ul> <li>at AC in hot operating state</li> <li>66 W</li> </ul>
<ul> <li>_4 of the accessories that can be ordered         <ul> <li>_5 of the accessories that can be ordered</li> <li>load monitoring, basis</li> </ul> </li> <li>General technical data         <ul> <li>product function</li> <li>zero-point switching</li> </ul> </li> <li>power loss [V-A] maximum</li> <li>66 VA</li> <li>power loss [W] for rated value of the current</li> <li>at AC in hot operating state</li> <li>66 W</li> </ul>
● _5 of the accessories that can be ordered load monitoring, basis  General technical data  product function zero-point switching  power loss [V-A] maximum 66 VA  power loss [W] for rated value of the current  • at AC in hot operating state 66 W
General technical data       product function     zero-point switching       power loss [V·A] maximum     66 VA       power loss [W] for rated value of the current     66 W
product function zero-point switching  power loss [V·A] maximum 66 VA  power loss [W] for rated value of the current  • at AC in hot operating state 66 W
power loss [V·A] maximum  66 VA  power loss [W] for rated value of the current  • at AC in hot operating state  66 W
power loss [W] for rated value of the current  • at AC in hot operating state  66 W
• at AC in hot operating state 66 W
at AC in hot operating state per pole     66 W
- acres in first operating state per pere
• without load current share typical 0.5 W
insulation voltage rated value 600 V
type of voltage
• of the operating voltage AC
• of the control supply voltage DC
surge voltage resistance of main circuit rated value 6 kV
shock resistance according to IEC 60068-2-27 15g / 11 ms
vibration resistance according to IEC 60068-2-6 2g
reference code according to EN 61346-2
reference code according to IEC 81346-2
Substance Prohibitance (Date) 05/28/2009
Main circuit
number of poles for main current circuit 1
number of NO contacts for main contacts 1
number of NC contacts for main contacts 0
type of voltage of the operating voltage AC
operating voltage
• at AC

— at 50 Hz rated value	48 600 V		
— at 60 Hz rated value	48 600 V		
operating frequency rated value	50 60 Hz		
relative symmetrical tolerance of the operating frequency	10 %		
operating range relative to the operating voltage at AC			
● at 50 Hz	40 660 V		
● at 60 Hz	40 660 V		
operational current			
<ul> <li>at AC-51 rated value</li> </ul>	50 A		
according to UL 508 rated value	50 A		
ampacity maximum	50 A		
operational current minimum	500 mA		
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/μs		
blocking voltage at the thyristor for main contacts	1 200 V		
maximum permissible	40 4		
reverse current of the thyristor	10 mA		
derating temperature	40 °C		
surge current resistance rated value	600 A		
I2t value maximum	1 800 A²-s		
Control circuit/ Control			
type of voltage of the control supply voltage	DC		
control supply voltage 1			
at DC rated value	30 V		
• at DC	4 30 V		
control supply voltage			
<ul> <li>at DC initial value for signal &lt;1&gt; detection</li> </ul>	4 V		
at DC full-scale value for signal<0> recognition	1 V		
control current at minimum control supply voltage			
• at DC	13 mA		
control current at DC rated value	15 mA		
ON-delay time	1 ms; additionally max. one half-wave		
OFF-delay time	1 ms; additionally max. one half-wave		
Auxiliary circuit			
number of NC contacts for auxiliary contacts	0		
number of NO contacts for auxiliary contacts	0		
number of CO contacts for auxiliary contacts	0		
Installation/ mounting/ dimensions			
fastening method	screw fixing		
side-by-side mounting	Yes		
design of the thread of the screw for securing the equipment	M4		
tightening torque of fixing screw maximum	1.5 N·m		
tightening torque [lbf·in] of fixing screw maximum	13 lbf-in		
height	85 mm		
width	22.5 mm		
depth	48 mm		
Connections/ Terminals			
product component removable terminal for auxiliary and control circuit	Yes		
type of electrical connection			
for main current circuit	screw-type terminals		
for auxiliary and control circuit	screw-type terminals		
type of connectable conductor cross-sections			
• for main contacts			
— solid	2x (1.5 2.5 mm²), 2x (2.5 6 mm²)		
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
for AWG cables for main contacts	2x (14 10)		
connectable conductor cross-section for main contacts			
<ul> <li>solid or stranded</li> </ul>	1.5 6 mm²		
<ul> <li>finely stranded with core end processing</li> </ul>	1 10 mm²		
tune of connectable conductor areas sections			
type of connectable conductor cross-sections			

for any illians and anythology to the				
for auxiliary and control contacts	4 (0.5 0.5 3) 0 (0.5	4.0 2)		
— solid	1x (0.5 2.5 mm²), 2x (0.5			
— finely stranded with core end processing	1x (0.5 2.5 mm²), 2x (0.5	•		
— finely stranded without core end processing	1x (0.5 2.5 mm²), 2x (0.5	1.0 mm²)		
for AWG cables for auxiliary and control contacts	1x (AWG 20 12)			
AWG number as coded connectable conductor cross section for main contacts	14 10			
tightening torque				
<ul> <li>for main contacts with screw-type terminals</li> </ul>	2 2.5 N·m			
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	0.5 0.6 N·m			
terminals				
tightening torque [lbf·in]	- 400 W.C.			
for main contacts with screw-type terminals	7 10.3 lbf·in			
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	4.5 5.3 lbf·in			
design of the thread of the connection screw				
• for main contacts	M4			
of the auxiliary and control contacts	M3			
stripped length of the cable				
• for main contacts	7 mm			
<ul> <li>for auxiliary and control contacts</li> </ul>	7 mm			
Safety related data				
protection class IP on the front according to IEC 60529	IP20			
touch protection on the front according to IEC 60529	finger-safe, for vertical contact	from the front		
Ambient conditions				
installation altitude at height above sea level maximum	1 000 m			
ambient temperature				
during operation	-25 +60 °C			
during storage	-55 +80 °C			
Electromagnetic compatibility				
conducted interference				
<ul> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV / 5 kHz behavior criterion	2		
• due to conductor-earth surge according to IEC 61000-4-5	2 kV behavior criterion 2			
<ul> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV behavior criterion 2			
<ul> <li>due to high-frequency radiation according to IEC 61000- 4-6</li> </ul>	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1			
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, beha	avior criterion 1		
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2			
conducted HF interference emissions according to CISPR11	Class A for industrial environment	ent		
field-bound HF interference emission according to CISPR11	Class B for the domestic, busin	ess and commercial envir	onments	
Short-circuit protection, design of the fuse link				
manufacturer's article number				
<ul> <li>of gS fuse for semiconductor protection at NH design usable</li> </ul>	3NE1802-0: These fuses have relays	a smaller rated current the	an the semiconductor	
<ul> <li>of full range R fuse link for semiconductor protection at cylindrical design usable</li> </ul>	5SE1335; These fuses have a smaller rated current than the semiconductor relays			
<ul> <li>of back-up R fuse link for semiconductor protection at NH design usable</li> </ul>	3NE8017-1			
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li> </ul>	3NC1450			
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li> </ul>	3NC2250			
manufacturer's article number of the gG fuse				
• at NH design usable	3NA6807; These fuses have a relays	3NA6807; These fuses have a smaller rated current than the semiconductor relays		
• at cylindrical design 22 x 58 mm usable	3NW6205-1; These fuses have a smaller rated current than the semiconductor relays			
manufacturer's article number				
of NEOZED fuse usable	5SE2320; These fuses have a smaller rated current than the semiconductor relays			
Certificates/ approvals				
General Product Approval		EMC	Declaration of Conformity	



Confirmation









Declaration of Conformity

Test Certificates other Railway



Special Test Certificate

Type Test Certificates/Test Report

Confirmation



Vibration and Shock

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2150-1AA45


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2150-1AA45


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RF2150-1AA45

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2150-1AA45&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2150-1AA45&lang=en</a>

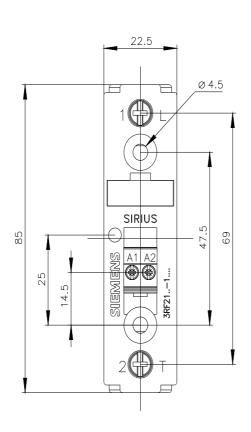

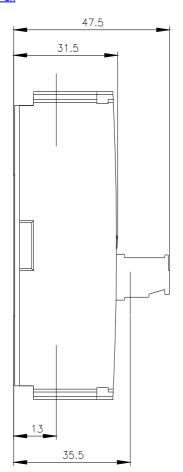

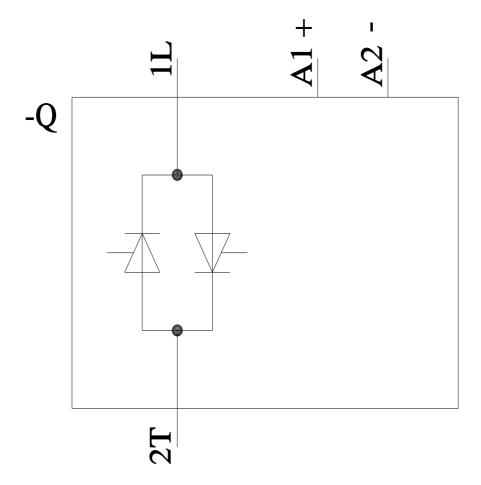

last modified: 8/29/2023 🖸