

# Product datasheet

Specifications



## PTO module - 2 channels - 4 input - 24 V DC - 4.3 mA - 2 connectors 28 pins

Local distributor code:  
393393275

BMXMSP0200

**EAN Code: 3595863998634**

### Main

Range of product	Modicon X80
Product or component type	PTO module
Number of channels	2
Number of inputs	4
Discrete input type	Current sink yes origin input conforming to IEC 61131-2 type 3 Current sink yes proximity input and limit switch input conforming to IEC 61131-2 type 3 Current sink or source counter in position input conforming to IEC 61131-2 type 3 Current sink or source drive ready, emergency input conforming to IEC 61131-2 type 3
Input compatibility	2-wire/3-wire proximity sensor 19.2...30 V conforming to IEC 947-5-2
Output compatibility	Signal converter (USIC) RS422, 7 mA input Source input, 5 V to 24 V
Output frequency	200 kHz <0.5 m with USIC and VW3M8210R05 100 kHz <5 m with the normal source input circuit 200 kHz <10 m with the RS422 compatible circuits

### Complementary

Operating threshold	> 12 V no error supply voltage > 8 V error supply voltage
Input voltage	24 V DC
Input current	4.3 mA
Voltage state 1 guaranteed	>= 11 V
Current consumption	35 mA at 24 V DC preactuator 150 mA at 3.3 V DC typical 200 mA at 3.3 V DC maximum
Current state 1 guaranteed	>= 2 mA
Voltage state 0 guaranteed	5 V
Current state 0 guaranteed	<= 1.5 mA
Response time	< 200 $\mu$ s for position completed input and drive ready input < 60 $\mu$ s for origin input and proximity input
Number of outputs	1 pulse output 2 auxiliary output
Preactuator voltage detection threshold	< 8 V error preactuator voltage auxiliary output < 8 V no error preactuator voltage auxiliary output > 14 V error preactuator voltage pulse output > 14 V no error preactuator voltage pulse output
Output voltage	24 V DC
Output voltage limits	19...30 V

Discrete output current	50 mA
Current per channel	0.4 A
Maximum leakage current	0.05 mA at state 0
[Ures] residual voltage	0.15 V at state 1
Response time on output	1.2...1.5 ms on appearance 1.2...1.5 ms on disappearance
Load impedance ohmic	15000 Ohm
Output overload protection	By current limiter and electronic circuit breaker
Output short-circuit protection	By current limiter and electronic circuit breaker
Reverse polarity protection	By reverse mounting diode on output Integrated on input
Insulation between channels	No insulated
Insul btwn prim and second	1500 Vrms
Insulation resistance	> 10 MOhm
Local signalling	1 LED (green) for module operating (RUN) 1 LED (red) for external fault (I/O) 1 LED (red) for internal fault, module failure (ERR) 1 LED (green) for download (DL) 8 LEDs (green) for channel status (CH00) 8 LEDs (green) for channel status (CH01)
Electrical connection	2 connectors with 28 pins
Module format	Standard
Product certifications	CE UL CSA RCM EAC Merchant Navy ATEX zone 2/22 IECEx zone 2/22

## Environment

Ambient air temperature for operation	-25...70 °C
Derating factor	Without
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive
Standards	IEC 61131-2 IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 IEC 61000-6-5, interface type 1 and type 2 IEC 61850-3, location G IEC 60079-0
Environmental characteristic	Hazardous location class I division 2

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.400 cm
Package 1 Width	11.500 cm

---

Package 1 Length	11.700 cm
Package 1 Weight	147.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	2.527 kg

---

## Logistical informations

---

Country of origin FR

## Contractual warranty

---

Warranty (in months) 18



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	45 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	19 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	25 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.3 kg CO2 eq.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Use Better



### Materials and Substances

Packaging made with recycled cardboard	Yes
EU RoHS Directive	<a href="#">Compliant By Exemption</a>
REACH Regulation	<a href="#">Reference contains Substances of Very High Concern above the threshold</a>

## Use Longer



### Lifetime extension

Repair	No
--------	----

## Use Again



### Repack and remanufacture

Recyclability potential, in %	3
End of life manual availability	<a href="#">End of Life Information</a>
Take-back	No

Dimensions Drawings

Modules Mounted on Racks

---

Dimensions



(1) With removable terminal block (cage, screw or spring).

(2) With FCN connector.

(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Connections and Schema

PTO Module Wiring


---

Auxiliary Inputs for Each PTO Channel


- Auxiliary Input 0: Drive\_Ready&Emergency
- Auxiliary Input 1: Counter\_in\_Position
- Auxiliary Input 2: Origin (Signal used only for homing mode)
- Auxiliary Input 3: Proximity&LimitSwitch

Inputs Circuit Diagrams


Drive\_Ready&Emergency inputs or Counter\_in\_Position (SINK/SOURCE input type):

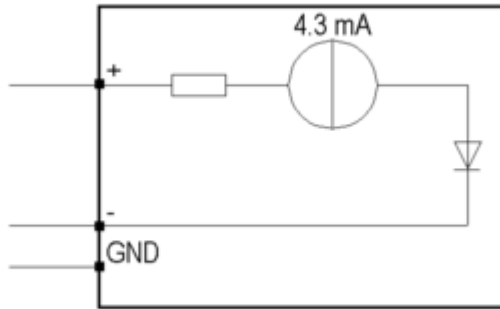

Origin or Proximity&LimitSwitch inputs (SINK input type):

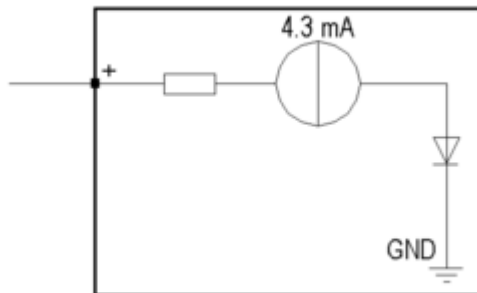


Module Connection for Drive\_Ready&Emergency and Counter\_in\_Position of SINK type

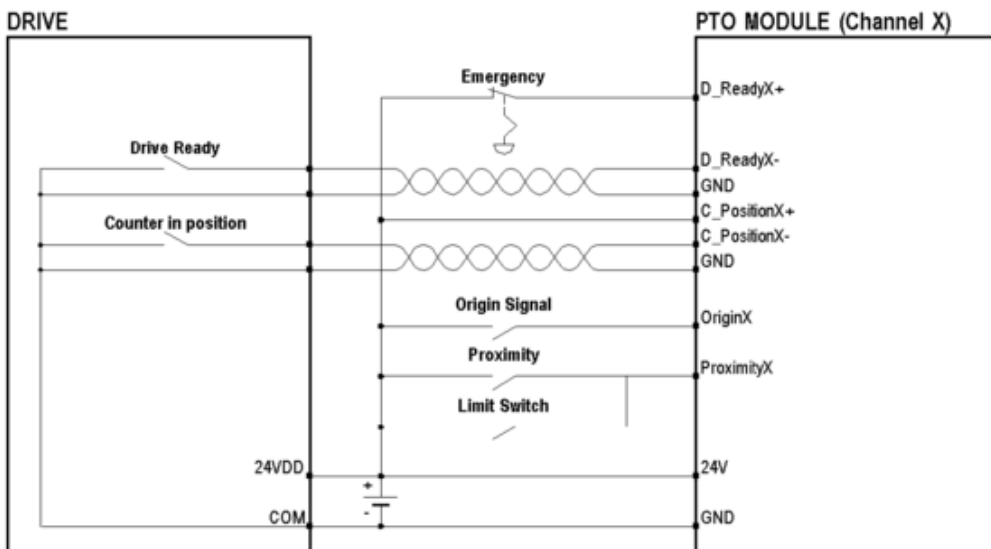

A twisted pair cable is necessary to connect the module to the drive.

**Module Connection for Drive\_Ready&Emergency and Counter\_in\_Position of SOURCE type**

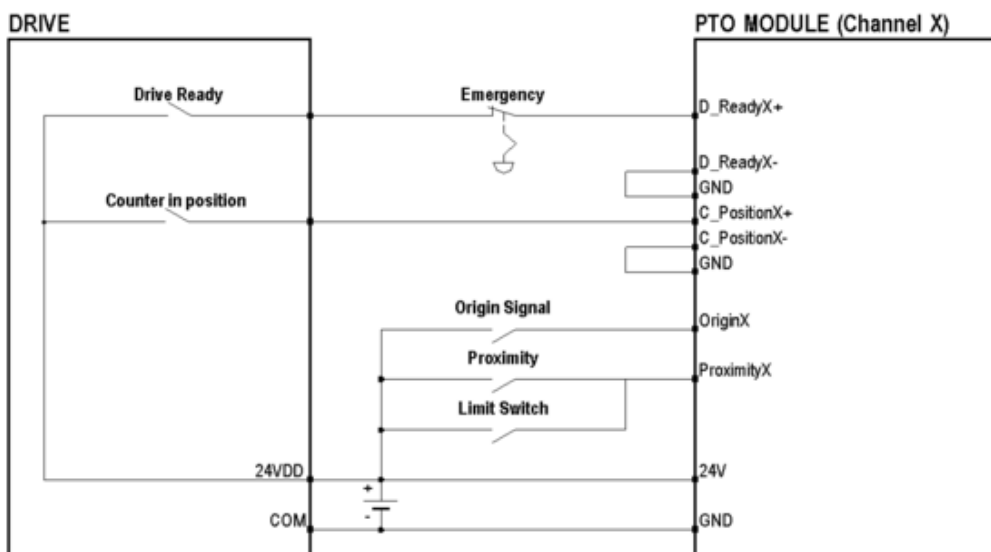

**NOTE:** In order to stop the PTO module when the PLC is set to STOP, connect the D\_ReadyX+ input to the PTO module via a BMXDRA0805 or a BMXDRA1605. This will make all outputs stop when the D\_Ready&Emergency input is set to 0.

**28 Pin Terminal Block Arrangements**

The terminal block is arranged as followed

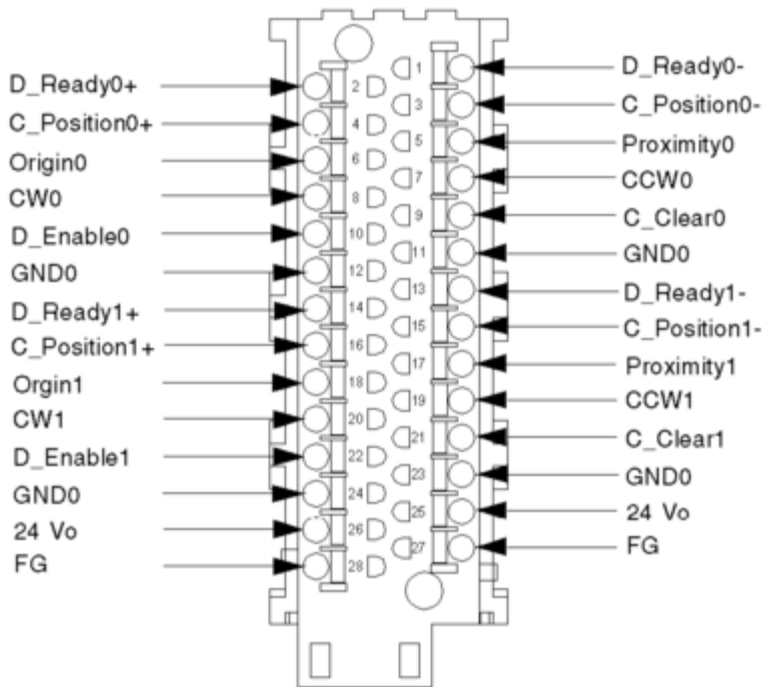


Image of product / Alternate images

Alternative

---





