

## Y08/YL8 INSTALLATION INSTRUCTIONS

**Installation:** The sounder can be affixed to most surfaces using screws through the external mounting lugs or by drilling internal fixing holes. A 20mm gland entry is provided for the supply cable. The cable and gland must be fitted in accordance with the national and local regulations. It is not necessary to earth the sounder circuitry but earth tags should be used if earth continuity of conduit or cable sheathing needs to be maintained.

**Supply input:** Ensure that the supply is correct for the voltage rating of the sounder and or combined sounder strobe being installed. Ensure that the supply is OFF before making any connection and wire only in accordance with the terminal label detail.

**Sound selection:** Ensure the supply is OFF before proceeding. All dc and ac units have selectable alarm sounds (see table below for details) and are selectable by means of a 5 way di switch SW1. A second sound is made available upon the application of a third wire connected to terminal TB3 as shown in Fig. 1 while still connected to terminal TB2. Alternatively 1st and 2nd stage sound signals can be generated by supply reversal (FOR DC UNITS ONLY) see Fig. 2. Independent second stage sound is available by using SW2.

**WARNING** - Very loud alarm sound, 120dB(A) output. Wear ear defenders when testing, installing and commissioning.

### SOUND SELECTION TABLE

	<i>First and Second Sound</i>	<i>frequency</i>	<i>rept.</i>	<i>switches</i>	
		<i>Hertz</i>	<i>rate</i>	<i>1 2 3 4 5</i>	<i>Special Application</i>
#	1 Alternate two-tone	800-1000	0.5	1 1 1 1 1	Fire Alarms
	2 Alternate two-tone	2500-3100	0.5	0 1 1 1 1	Security Alarms
	3 Alternate fast two-tone	800-1000	0.25	1 0 1 1 1	Increased urgency
	4 Alternate fast two-tone	2500-3100	0.25	0 0 1 1 1	Security deterrent
#	5 Alternate two-tone	440-554	0.4/0.1	1 1 0 1 1	AFNOR, France
	6 Alternate two-tone	430-470	1.0	0 1 0 1 1	
	7 Alternate v.fast two-tone	800-1000	0.13	1 0 0 1 1	
	8 Alternate v.fast two-tone	2500-3200	0.07	0 0 0 1 1	
	9 Alternate two-tone	440-554	2.0	1 1 1 0 1	Turn-out, Sweden
	10 Continuous note	700	-	0 1 1 0 1	All-clear, Sweden
#	11 Continuous note	1000	-	1 0 1 0 1	
	12 Continuous note	1000	-	0 0 1 0 1	
	13 Continuous note	2300	-	1 1 0 0 1	
	14 Continuous note	440	-	0 1 0 0 1	
#	15 Interrupted tone	1000	2.0	1 0 0 0 1	
#	16 Interrupted tone	420	1.25	0 0 0 0 1	AS2220, Australia
	17 Interrupted tone	1000	0.5	1 1 1 1 0	
	18 Interrupted tone	2500	0.25	0 1 1 1 0	
	19 Interrupted tone	2500	0.5	1 0 1 1 0	
	20 Interrupted tone	700	6/12	0 0 1 1 0	Pre-vital mess, Sweden
	21 Interrupted tone	1000	1.0	1 1 0 1 0	
	22 Interrupted tone	700	4.0	0 1 0 1 0	Air-raid, Sweden
	23 Interrupted tone	700	0.25	1 0 0 1 0	Local warning, Sweden
	24 Interrupted tone	720	0.7/0.3	0 0 0 1 0	Industrial alarm, Germany
	25 Int,fast,rising volume	1400	0.25	1 1 1 0 0	
	26 Fast siren	250-1200	0.085	0 1 1 0 0	
	27 Rising constant, fall	1000	10/40/10	1 0 1 0 0	Industrial alarm, Germany
#	28 ISO 8201 Evacuation	800-1000	as std	0 0 1 0 0	Int'l evacuation alarm
	29 Fast whoop	500-1000	0.15	1 1 0 0 0	
#	30 Slow whoop	500-1200	4.5	0 1 0 0 0	Evacuation, The Netherlands
#	31 Reverse sweep	1200-500	1	1 0 0 0 0	Evacuation, Germany
	32 Siren	500-1200	3.0	0 0 0 0 0	

switch settings: ON=1 and OFF=0

# - Tones approved to BSEN54 Part3

The PFEER sound signals recommended by UKOOA are:-

<b>General Alarm</b>	<b>Sound Signal 15</b>	<b>Interrupted tone 1000 Hz</b>
<b>PAPA</b>	<b>Sound Signal 31</b>	<b>Reverse Sweep 1200-500 Hz</b>
<b>Toxic Gas</b>	<b>Sound Signal 11</b>	<b>Continuous Tone 1000 Hz.</b>


**MOUNTING:** The Y08 series alarm units are mounted to a wall or bulkhead of suitable material using the lugs projecting from the side of the case. The lugs are bored 8mm clearance on 250mm centres. The recommended length of fixing screws is 30mm. To maintain the integrity of the weather seal, the cable entry must be via a suitable sealed gland.

**Information for users of the YL8 combination devices:** The optical device/beacon cannot be used as part of a fire alarm system.

Only the sounder has been certified to the relevant EN54 standard.


D7212/9

FIGURE 1: DC INPUT

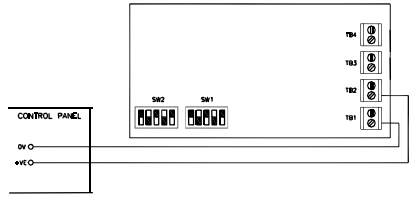

LINE INTEGRITY ON DC SYSTEMS  
 - FOR 3 WIRE 2 STAGE ALARM SYSTEM,  
 MONITOR VIA REVERSE POLARITY  
 - FOR 2 WIRE 2 STAGE ALARM SYSTEM,  
 MONITOR VIA THRESHOLD (APPLIED VOLTAGE < 1V)  
 AN END-OF-LINE (E.O.L) RESISTOR IS REQUIRED FOR LINE  
 MONITORING AND SHOULD BE A MINIMUM RESISTANCE OF  
 3K3 OHMS AND 0.5WATTS, WIRE-WOUND OR METAL FILM  
 TYPE

FIGURE 2: DC INPUT  
 2nd STAGE WITH THIRD WIRE

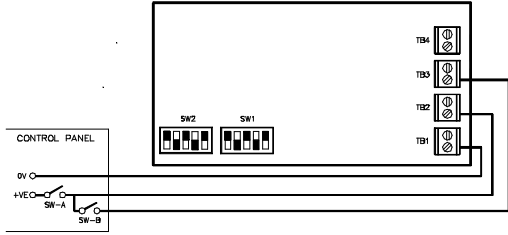

2nd STAGE BY SUPPLY REVERSAL



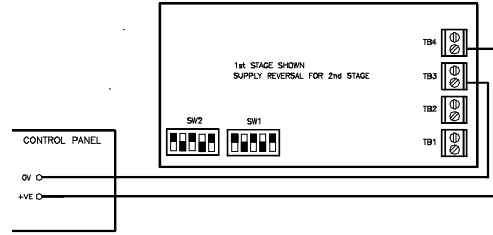


FIGURE 3: AC INPUT

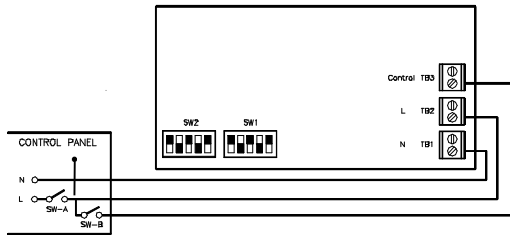


NOTE: CONTROL WIRE IS NEEDED FOR 2nd  
 STAGE ALARM

FIGURE 4: SYSTEM CONNECTION - DC

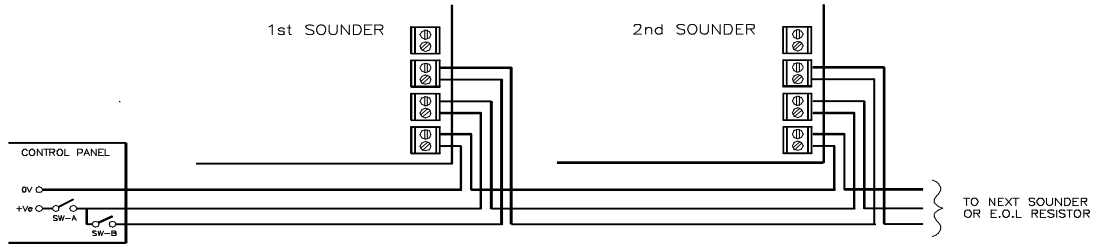


WIRING DETAILS FOR YL UNIT

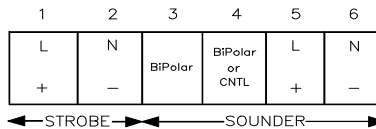

This is an audible alarm device for fire alarm devices on the standard EN 54-3 with EC-Certificate of conformity (Construction Products Regulations) CE0086-CPR-96705 which was first issued at the year 2011 & CE11.



POLAR DIAGRAM OF TONE 11  
 (see Website for all other  
 EN54 Part 3 approved tones)

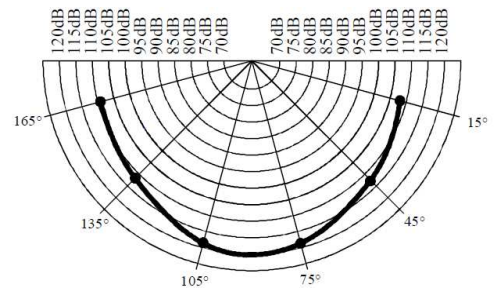

A GROUP OF R. STAHL, WALDENBURG, GERMANY

**R. STAHL (P) Ltd.,**

Plot No: 5, Malrosapuram Main Road, Sengundram Industrial Area, Malrosapuram – Post,  
 Singaperumal Koil, Chengalpet – Taluk, Kanchipuram District. Pin : 603204,  
 Phone +91 44 30600600 | Fax +91 44 30600700 [www.stahl.de](http://www.stahl.de)

