



BURST FIRED AC ENERGY REGULATOR 110-230V AC 16A

ZVS 16DV

X10249

INTRODUCTION

The ZVS 16DV is a dual voltage, 16A enclosed compact energy regulator for manual proportional control of power to resistive loads using variable bursts of energy. The burst firing circuit provides trigger pulses coincident with the mains polarity crossover, ensuring complete sine wave cycles are passed through to the resistive load. This prevents fast changes in load current and inhibits RFI (radio frequency interference) which is normally found with switches, relays and phase angle fired triacs or similar devices. The output is block bursts, with a full 0 to 100% range.

APPLICATIONS

Virtually all resistive heating loads including ovens, furnaces, hot plates, extruders, moulders, space heating, boilers, dryers, soldering pots and irons, heating tapes, stress relieving, smelters and heating mantles.


FEATURES

- Input voltage range suitable for 110V to 230V ac
- Load rating range - resistive, from 0.1 to 3.7kW @ 230V and 0.1 to 1.8kW @ 110V ac
- High surge 26A power device
- No remote filter requirements - Zero Voltage Switching control
- Wire protective screw fixing terminal block connections




INSTALLATION

DIMENSIONS AND CONNECTIONS

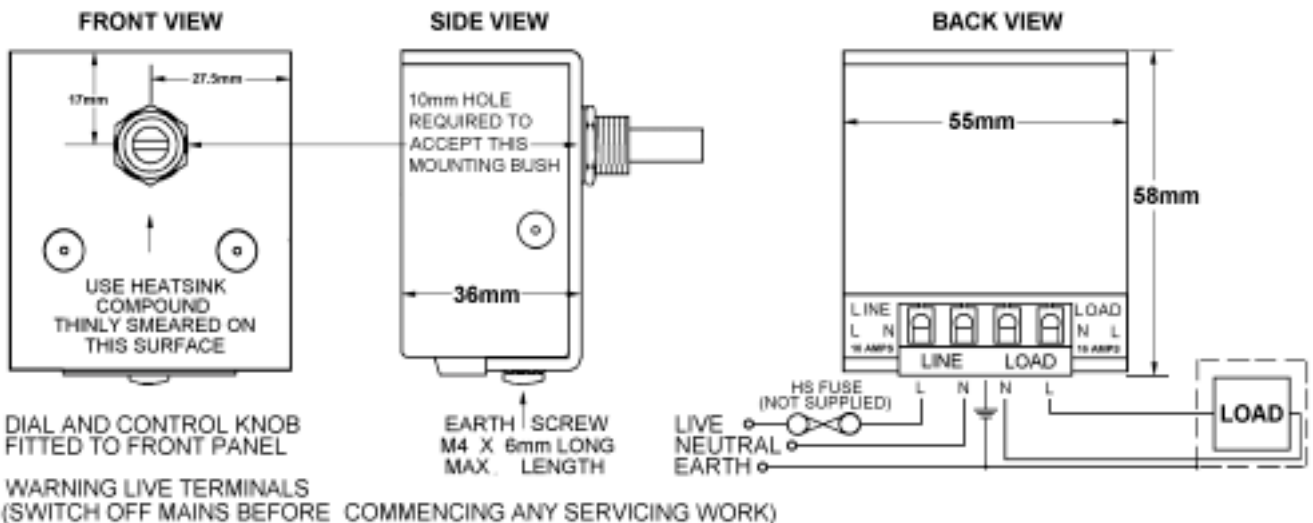

INSTALLATION

COOLING REQUIREMENTS

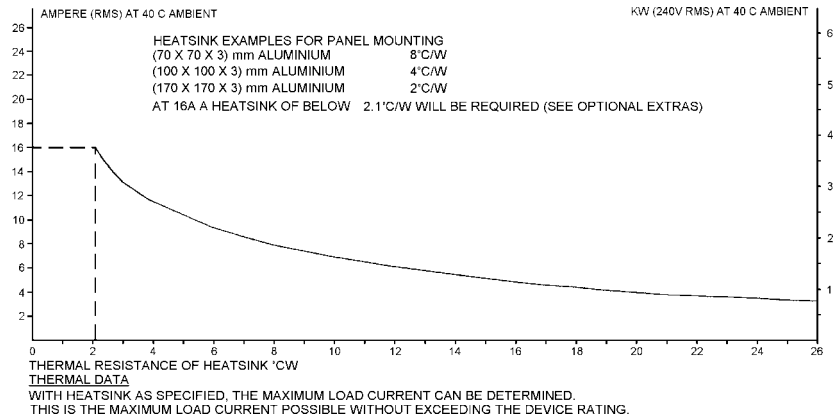

SPECIFICATIONS

Maximum RMS on-state current	16A	I ² t for fusing	128 A ² s
Peak one cycle surge current	200A	Weight (approx)	105g
Maximum supply voltage +/-10% @ 50/60Hz	230V	Maximum c.s.a. cable entry	2.5mm ²
Minimum supply voltage +/-10% @ 50/60Hz	110V	<i>further dimensions</i>	
Maximum peak repetitive voltage	600V	Shaft diameter (1/4 inch)	6.3mm
Maximum Power consumption	6W	Shaft projection from bush	13mm
Operating and storage temperature range	-20 to +85°C	Bush length	7mm
Isolation voltage	2500V rms	Fixing hole diameter	10mm

FUSING:

It is recommended to use semiconductor (fast acting) type fuses or circuit breakers (Semiconductor - MCB) for unit protection. On initial 'switch on' some loads may need an increased Factor of Safety (F of S) for unit and/or device protection. (See SRA Datasheet for further information)

CE MARKING

This product family carries a "CE marking". For information see recommendation section and contact our sales desk. (See Declaration of Conformity)

RECOMMENDATION

Other documents available on request, which may be appropriate for your applications.

CODE	IDENTITY	DESCRIPTION
X10229	RFI	Filtering recommendation - addressing EMC Directive
X10213	ITA	Interaction, uses for phase angle and for burst fire control.
X10255	SRA	Safety requirements - addressing the Low Voltage Directive (LVD) including :- Thermal data/cooling; "Live" parts warning & Earthing requirements; Fusing recommendations.
AP02/4	COS	UAL Conditions of sale.

NOTE It is recommended that installation and maintenance of this equipment should be done with reference to the current edition of the I.E.E. regulations (BS7671) by suitably qualified/trained personnel. The regulations contain important requirements regarding safety of electrical equipment. (For International standards refer to I.E.C directive IEC 950)

ORDER CODE:

State product description

ZVS 16DV

OPTIONAL EXTRAS:

Standard Knob; ZVS Dial, Heatsink compound



UNITED AUTOMATION LIMITED

1Southport Business Park
 Kew
 Southport, PR8 4HQ
 ENGLAND

Tel: 0044 (0) 1704 – 516500 Main
 Tel: 0044 (0) 1704 – 516516 Sales
 Fax: 0044 (0) 1704 – 516501
 Enquiry@united-automation.com

