

Indicator

17-540354

Distribution by
Rs-online<https://rs-online.eao.com/p/17-540354>

Your product:



17-540354 Indicator

FRONT

Front dimension:	Ø 25 mm
Front form:	Round
Reflector:	Metal, polished chromium-plated

MOUNTING

Design:	Raised
Mounting cut-out:	Ø 22.3 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Illumination colour:	Red / Yellow / Green
----------------------	----------------------

ELECTRICAL CHARACTERISTICS

Operating voltage:	24 V DC $\pm 10\%$
Operation current:	24 - 50 mA $\pm 15\%$
Lumi. Intensity:	51/92/120 mcd
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

MECHANICAL CHARATERISTIC

Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.042 kg

AMBIENT CONDITION

IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Operating temperature:	– 20 °C ... + 60 °C
Storage temperature:	– 25 °C ... + 80 °C

CERTIFICATE

Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)
REACH:	REACH compliant
RoHS:	RoHS compliant


OTHER

Short Description:	Indicator, Ø 22.3 mm, Ø 25 mm, Round, Plug-in terminal, 2.8 x 0.8 mm, Red / Yellow / Green
---------------------------	--


Kind of illumination:	Tri-colour-LED
------------------------------	----------------

Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
---------------	--

Wiring diagrams:

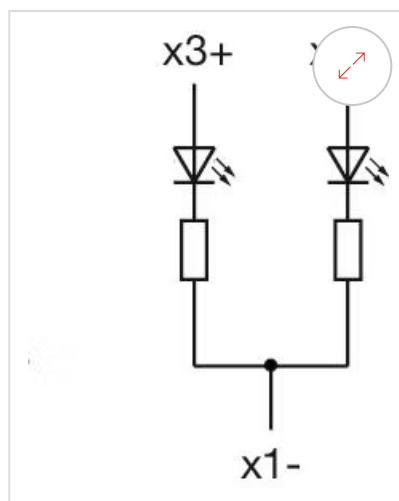


Component layouts:

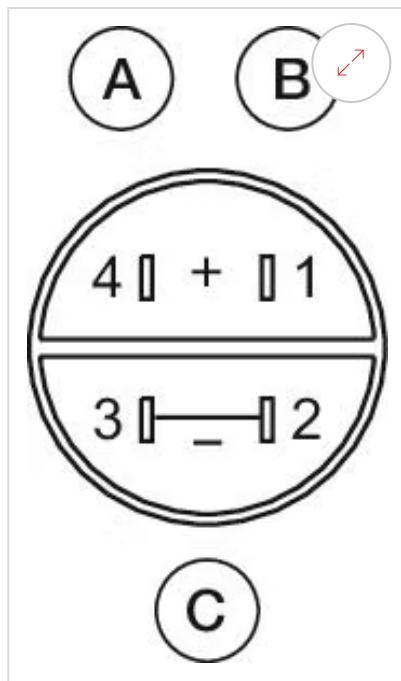


A = Green
B = Red
C = common cathode

Mounting cut-outs:

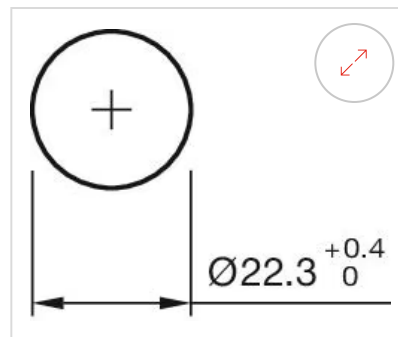

Dimension drawings:

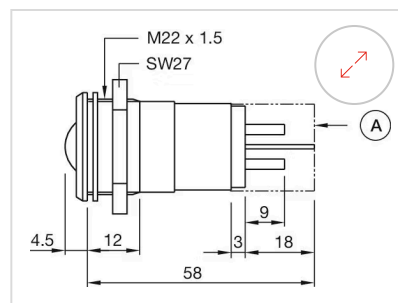

A = Protection tube