

Product data sheet

Miniature connectors




| | |
|---------------------|--|
| Product description | Bayonet Male cable connector, Contacts: 7, 3.0-6.0 mm, unshielded, solder, IP40 |
| Area | Bayonet |
| Series | 678 |
| Part no. | 99 0621 00 07 |


Illustration



Scale drawing

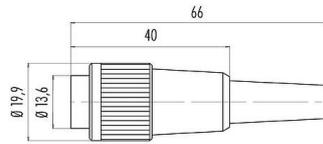

Contact arrangement (Plug-in side)

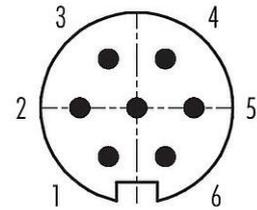

You can find the assembly instructions on the next page.

Technical data

General features

| | |
|---------------------------|------------------------------------|
| Part no. | 99 0621 00 07 |
| Connector design | Male cable connector |
| Version | Connector pin straight |
| Connector locking system | Bayonet |
| Termination | solder |
| Degree of protection | IP40 |
| Connection cross-section | max. 0.75 mm ² / AWG 18 |
| Cable outlet | 3.0-6.0 mm |
| Temperature range from/to | -40 °C / 85 °C |
| Mechanical operation | > 500 Mating cycles |
| Weight (g) | 9.51 |
| Customs tariff number | 85369010 |
| Country of Origin | DE |

Electrical parameters

| | |
|---------------------------|----------------------|
| Rated voltage | 125 V |
| Rated impulse voltage | 800 V |
| Rated current | 5.0 A |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| Pollution degree | 1 |
| Overvoltage category | I |
| Insulating material group | III |
| EMC compliance | unshielded |

Product data sheet

Miniature connectors



Product description **Bayonet Male cable connector, Contacts: 7, 3.0-6.0 mm, unshielded, solder, IP40**

Area **Bayonet**
Series **678**
Part no. **99 0621 00 07**

Material

| | |
|-----------------------|--------------------------------------|
| Housing material | PA |
| Contact body material | PBT (UL94 V-0) |
| Contact material | CuZn (brass) |
| Contact plating | Ag (silver) |
| REACH SVHC | CAS 7439-92-1 (Lead) |
| SCIP number | 6c95b3b5-9b61-460f-b434-1a7685a2de9d |

Classifications


| | |
|-------------|-------------|
| eCl@ss 11.1 | 27-44-01-02 |
| ETIM 9.0 | EC002635 |

Declarations of conformity

| | |
|-----------------------|---|
| Low Voltage Directive | 2014/35/EU (EN 60529:1991 2014/35/EU;EN 60204-1:2018) |
|-----------------------|---|

Assembly instructions

1. Bead cable carrier sleeve, locking ring, cable bushing and sleeve to cable.
2. Dismantle cable to 12 mm length.
3. Strip and solder single wires.
4. Place the cover on the cable carrier sleeve and fasten the cable strap with fillister head screws.
5. Push assembled part with contact insert into the sleeve and fasten with self-tapping screw.

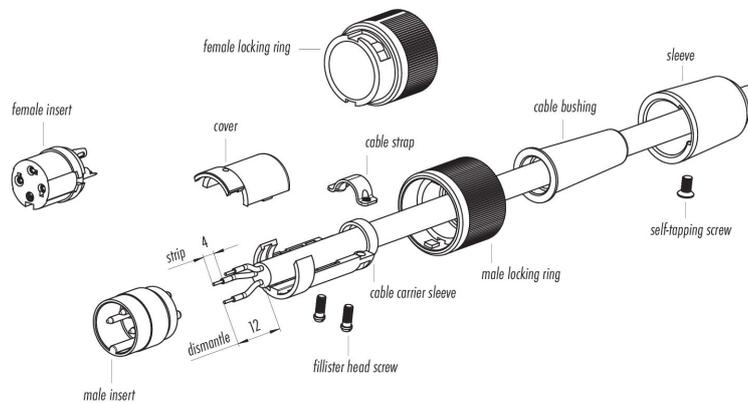

| | |
|---------------------|--|
| Product description | Bayonet Male cable connector, Contacts: 7, 3.0-6.0 mm, unshielded, solder, IP40 |
| Area | Bayonet |
| Series | 678 |
| Part no. | 99 0621 00 07 |

General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".