



APPLICATION SPECIFICATION

ULTRA WIDEBAND PCB ANTENNA

1.0 SCOPE

This specification describes the antenna application and surrounding. The information in this document is for reference and benchmark purposes only. The user is responsible for validating antenna RF performance based on the user's actual implementation.

All measurements are done of the antenna mounted on a PC/ABS material block of 1mm thickness with VNA Agilent 5071C and OTA chamber. All measurements are done with the part no. 146184-0100 with a cable length of 100mm.

Antenna illustrations in this document are generic representations. They are not intended to be an image of any antenna listed in the scope.

2.0 PRODUCT DESCRIPTION

A. DEFINITIONS OF TERMS

The overall antenna size is 47mm*17.6mm (Figure 2.1).

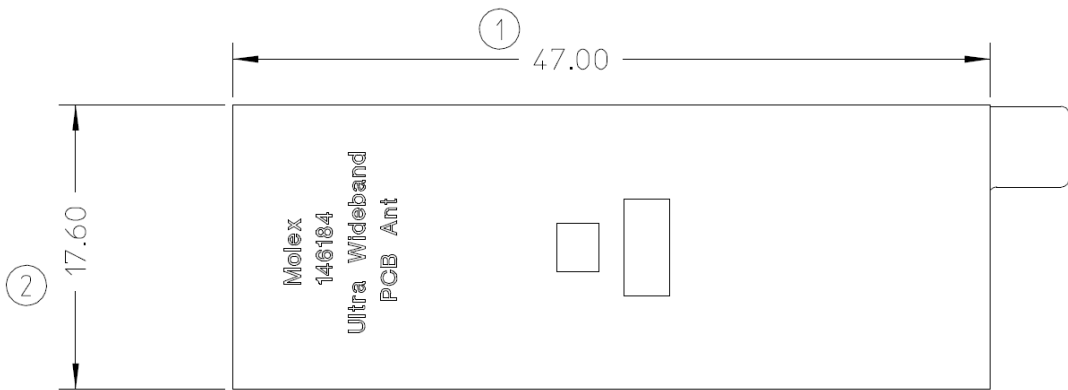


FIGURE 1. DIMENSIONS OF THE ULTRA WIDEBAND PCB ANTENNA

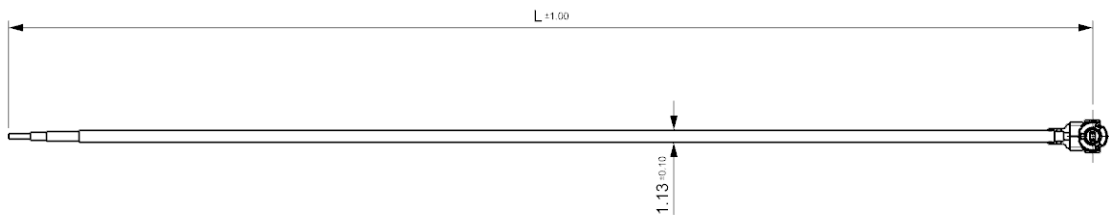


FIGURE 2. CABLE LINE VIEW OF ULTRA WIDEBAND PCB ANTENNA

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 1 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22

B. RF PERFORMANCE OF ANTENNA LOADED WITH PC/ABS MATERIAL BLOCK OF 1MM THICKNESS IN FREE SPACE

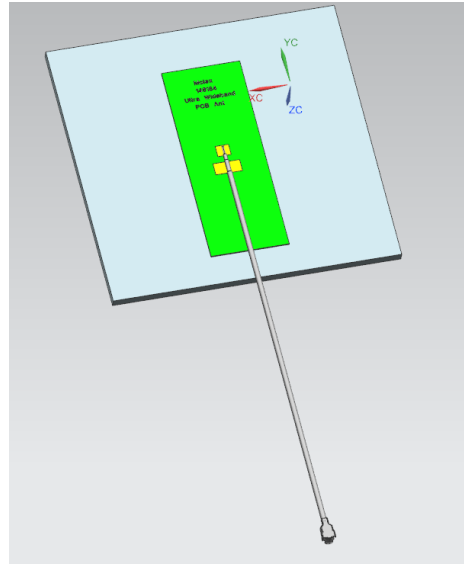


FIGURE3.1 ANTENNA LOADED WITH PC/ABS BLOCK OF 1MM THICKNESS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Frequency Range	3GHz~6GHz	3GHz~6GHz
Return Loss	Antenna loads on PC/ABS housing (thickness 1mm) with 100mm; 1.13mm diameter micro coax cable. Measured by VNA5071C	< -6 dB
Peak Gain	Measure antenna on recommended PC/ABS housing through OTA chamber	4.5dBi
Total Efficiency	Measure antenna on recommended PC/ABS housing through OTA chamber	>70%
Polarization	Measure antenna on recommended PC/ABS housing through OTA chamber	Linear
Input Impedance	Measure antenna on recommended PC/ABS housing through VNA E5071C	50 Ohms

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 2 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22



APPLICATION SPECIFICATION

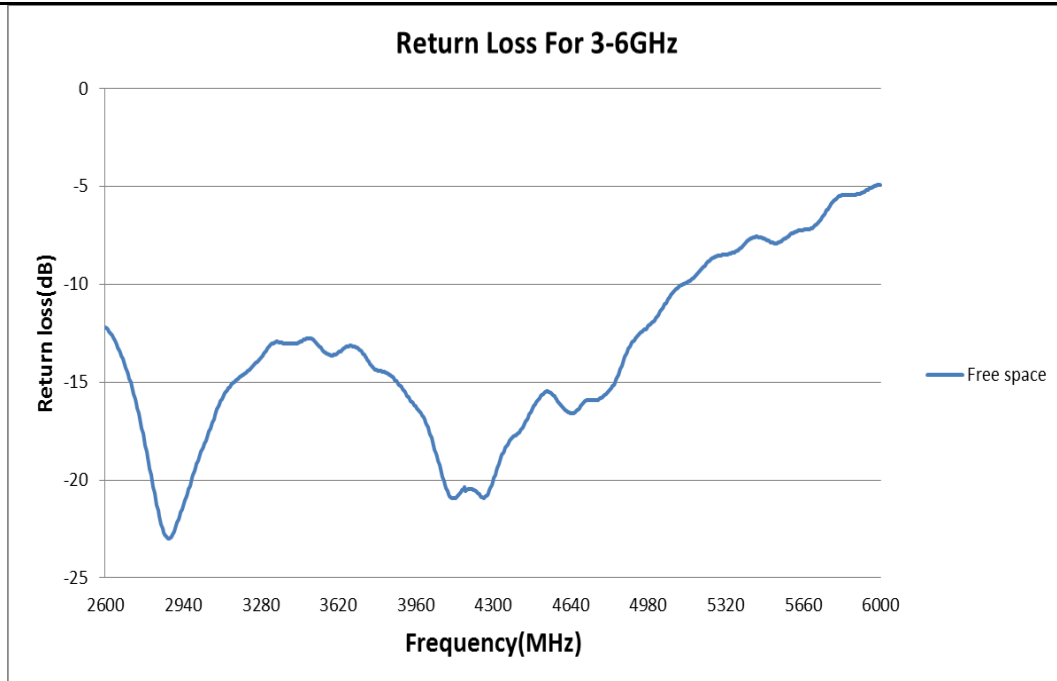


FIGURE 3.2 RETURN LOSS OF ANTENNA AT 3GHZ-6GHZ IN FREE SPACE

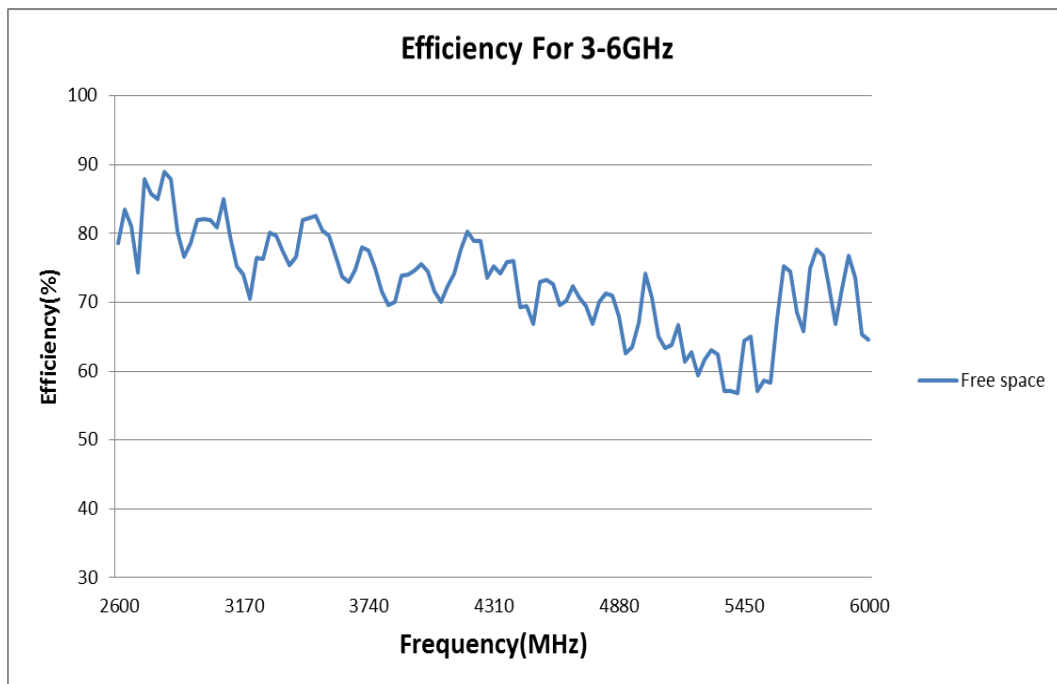


FIGURE 3.3 EFFICIENCY OF ANTENNA AT 3GHZ-6GHZ IN FREE SPACE

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 3 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22

3.0 REFERENCE DOCUMENTS

- ENGINEERING DRAWING – AS-146184-0100
- PRODUCT SPECIFICATION – PS-146184-0100
- PACKAGING INFORMATION – REFER TO THE MOLEX RELATED PACKAGING DRAWINGS.

4.0 RF PERFORMANCE AS A FUNCTION OF IMPLEMENTATION

4.1 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT LOCATION WITH PARALLEL GROUND

Four ground locations with parallel ground have been evaluated, with different distances from the antenna and these locations are shown in figure 4.1. The PCB size is 90mm*90mm and we move the PCB to four locations for each test. According to the results, the minimum ground distance from antenna is recommended to be 20mm to achieve acceptable antenna performance.

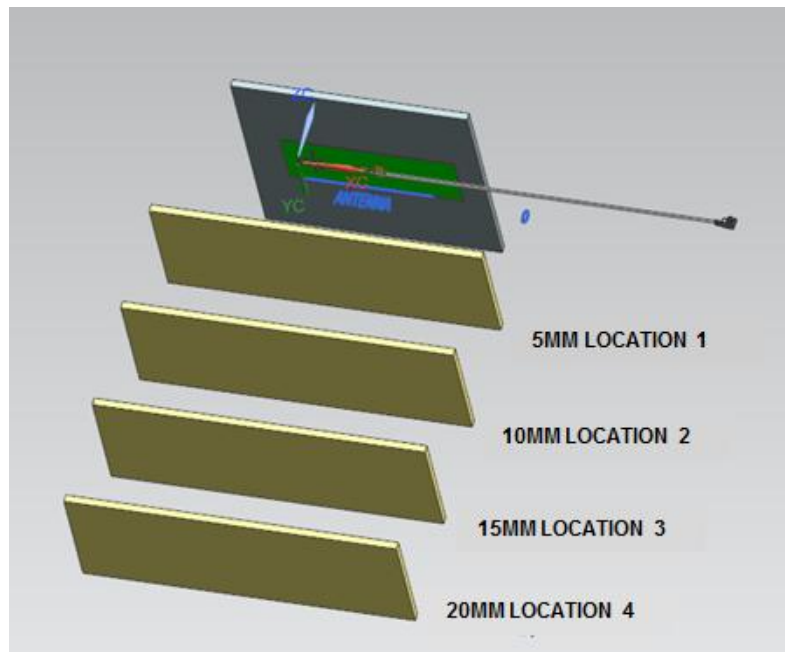


FIGURE 4.1 FOUR LOCATIONS WITH PARALLEL GROUND

Ground Size: 90mm*90mm

Location 1: Distance between antenna and ground is about 5mm.

Location 2: Distance between antenna and ground is about 10mm

Location 3: Distance between antenna and ground is about 15mm.

Location 4: Distance between antenna and ground is about 20mm.

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 4 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22



APPLICATION SPECIFICATION

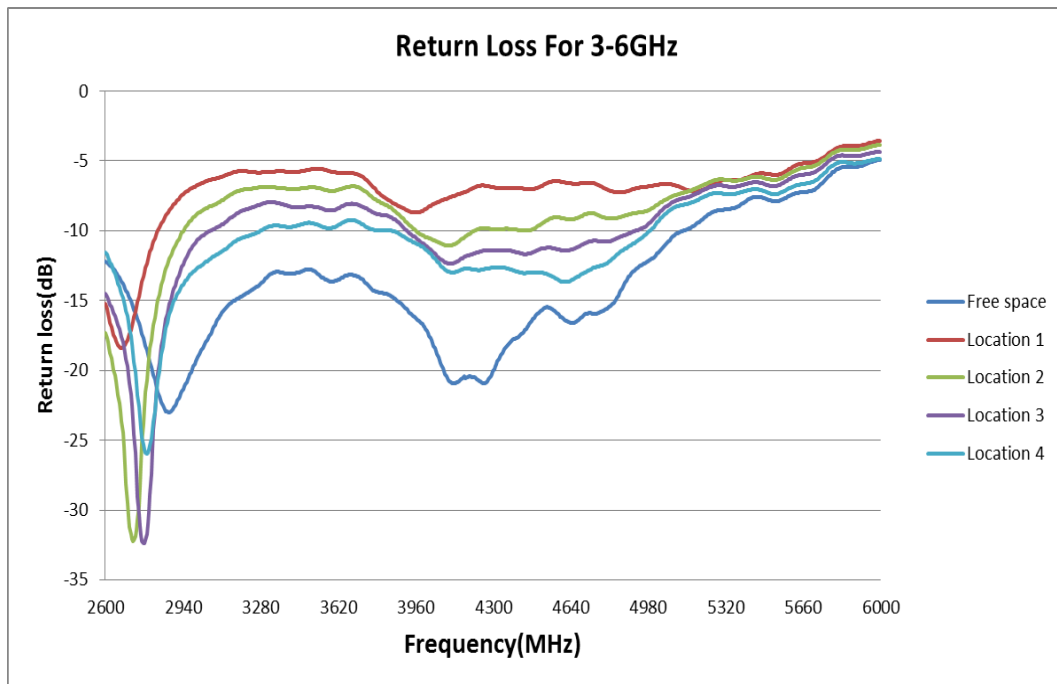


FIGURE 4.1.1 RETURN LOSS OF ANTENNA 3-6 GHZ BAND AT FOUR LOCATIONS WITH PARALLEL GROUND

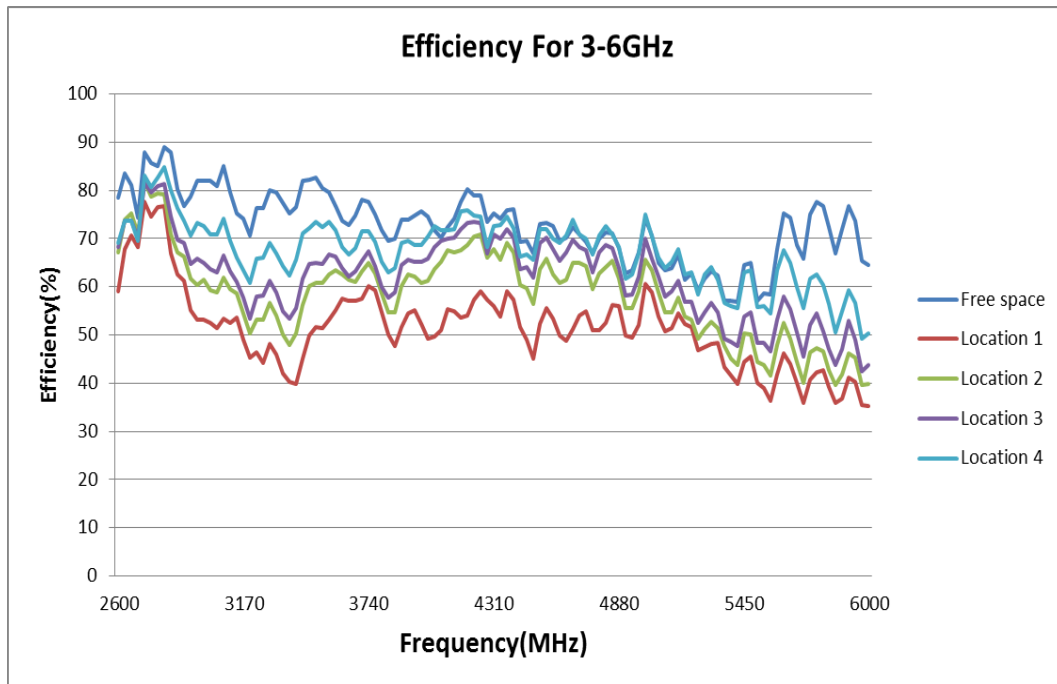


FIGURE 4.1.2 EFFICIENCY OF ANTENNA 3-6 GHZ BAND AT FOUR LOCATIONS WITH PARALLEL GROUND

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 5 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22

4.2 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT LOCATION WITH VERTICAL GROUND

Four ground locations with vertical ground have been evaluated, with different distances from the antenna and these locations are shown in figure 4.2. The PCB size is 90mm*90mm and we move the PCB to four locations for each test. According to the results, the minimum ground distance from antenna is recommended to be 15mm to achieve acceptable antenna performance.

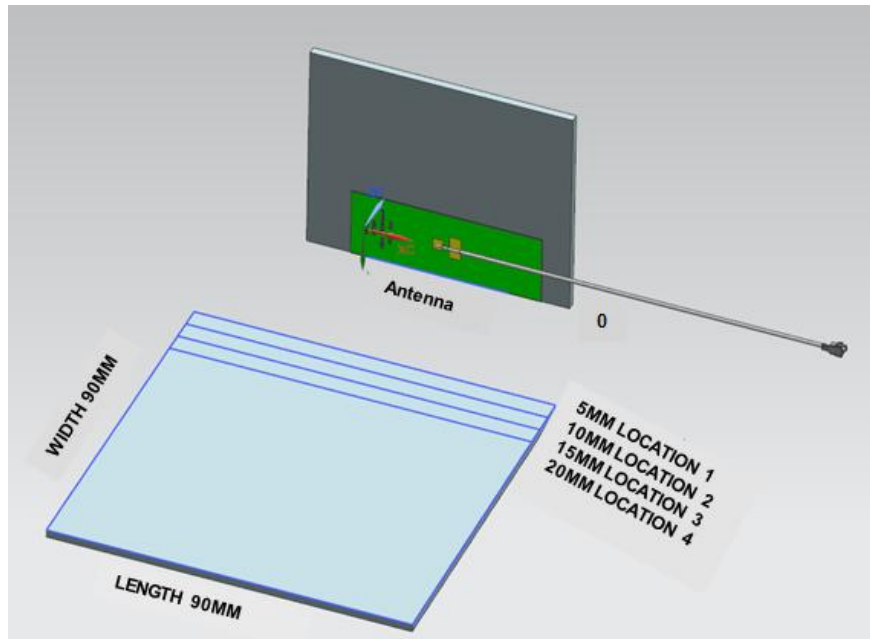


FIGURE 4.2 FOUR LOCATIONS WITH VERTICAL GROUND

Ground Size: 90mm*90mm

Location 1: Distance between antenna and ground is about 5mm

Location 2: Distance between antenna and ground is about 10mm.

Location 3: Distance between antenna and ground is about 15mm.

Location 4: Distance between antenna and ground is about 20mm.

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 6 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22



APPLICATION SPECIFICATION

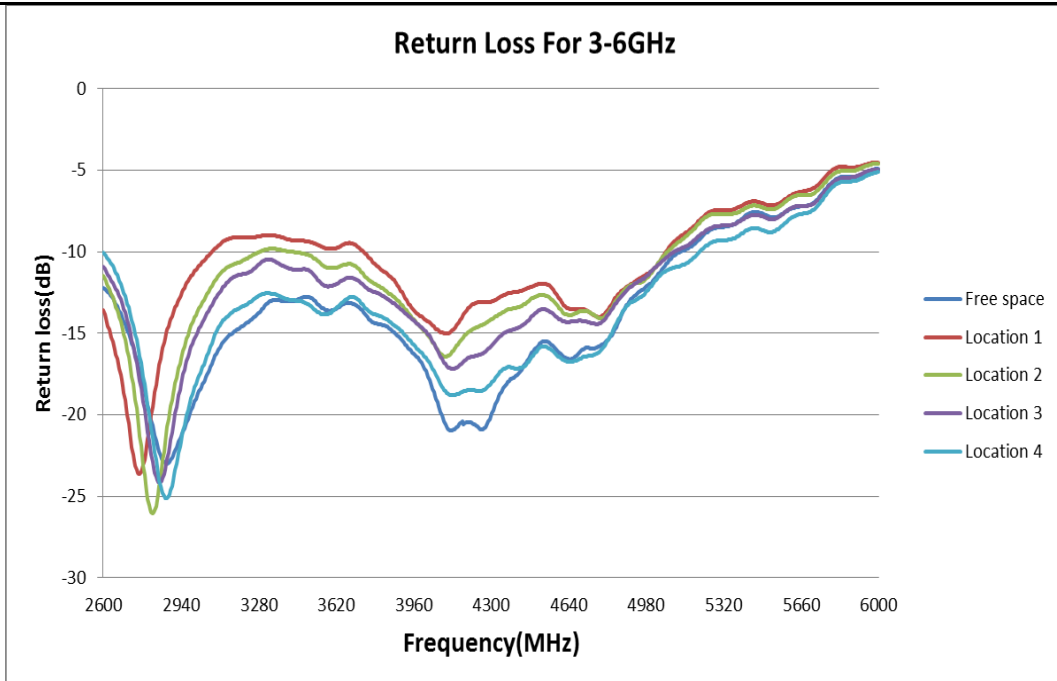


FIGURE 4.2.1 RETURN LOSS OF ANTENNA 3-6 GHZ BAND AT FOUR LOCATIONS WITH VERTICAL GROUND

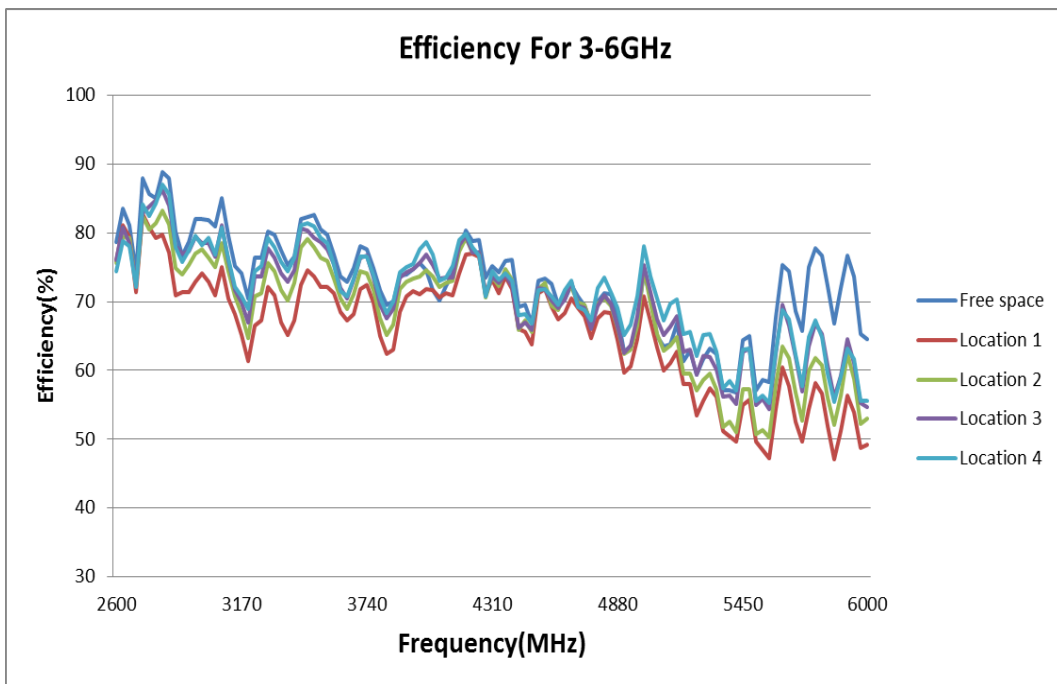


FIGURE 4.2.2 EFFICIENCY OF ANTENNA 3-6 GHZ BAND AT FOUR LOCATIONS WITH VERTICAL GROUND

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 7 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22

4.3 ANTENNA RF PERFORMANCE AS A FUNCTION OF DIFFERENT DISTANCE TO GROUND IN THE SAME PLANE WITH THE ANTENNA

Four ground locations with same plane ground have been evaluated, and these locations are presented in figure 4.3. The PCB size is 90mm*90mm and we move the PCB to four locations for each test. The ground distance in this configuration is recommended to be at least 5mm from the antenna to meet the return loss and total efficiency antenna specification.

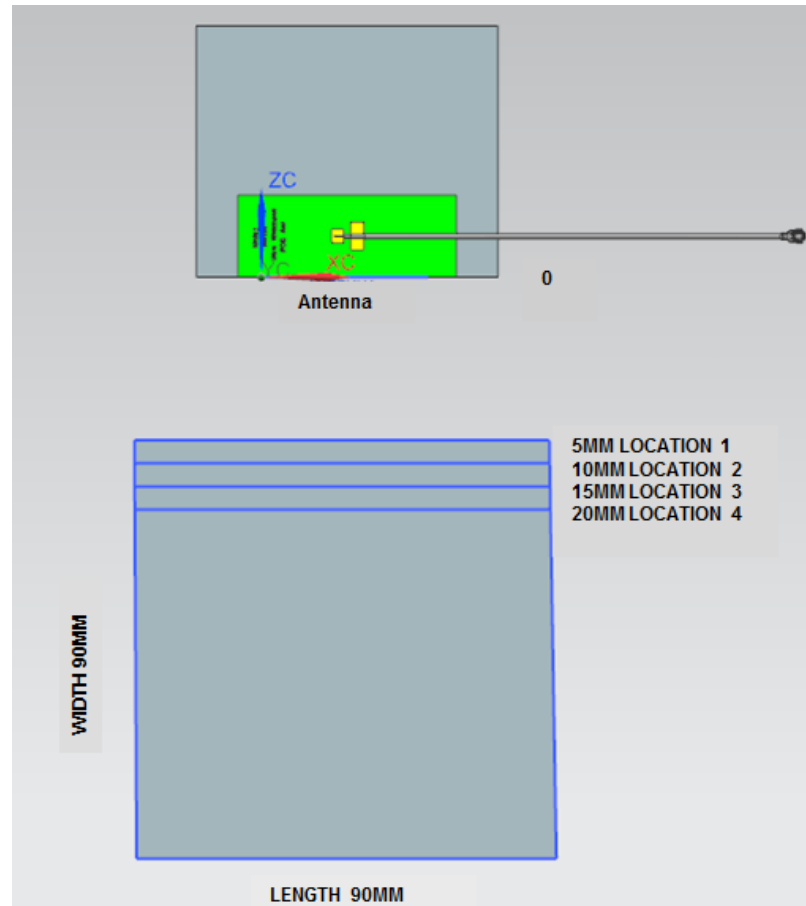


FIGURE 4.3 FOUR LOCATIONS WITH SAME PLANE GROUND

Ground Size: 90mm*90mm

Location 1: Distance between antenna and ground is about 5mm.

Location 2: Distance between antenna and ground is about 10mm

Location 3: Distance between antenna and ground is about 15mm.

Location 4: Distance between antenna and ground is about 20mm.

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 8 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22



APPLICATION SPECIFICATION

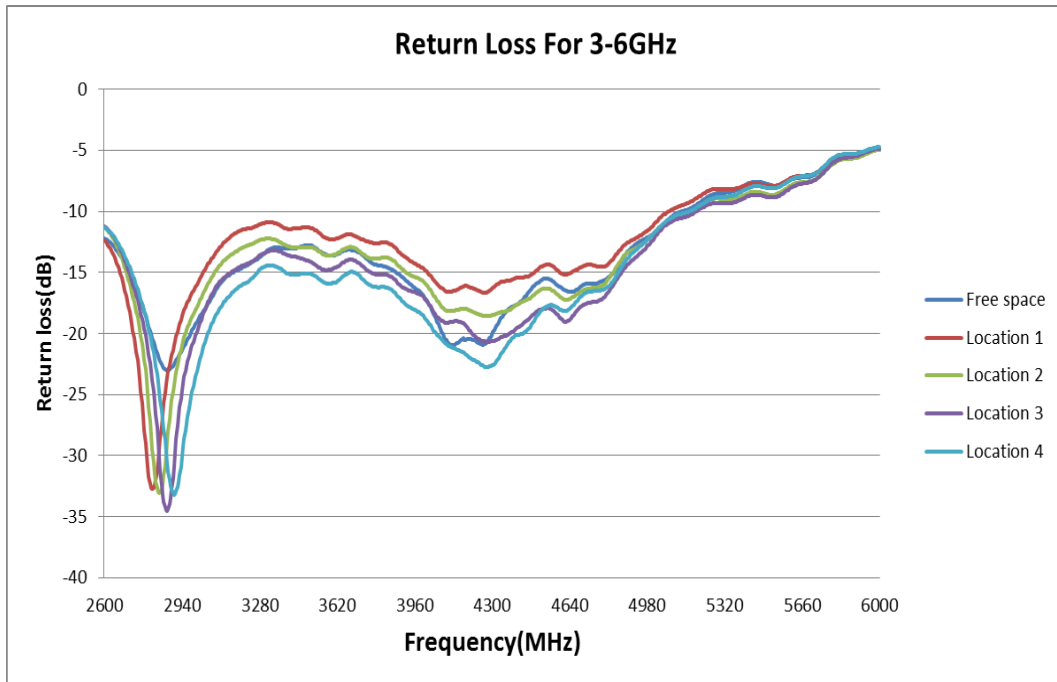


FIGURE 4.3.1 RETURN LOSS OF ANTENNA 3-6 GHZ BAND AT FOUR LOCATIONS WITH SAME PLANE GROUND

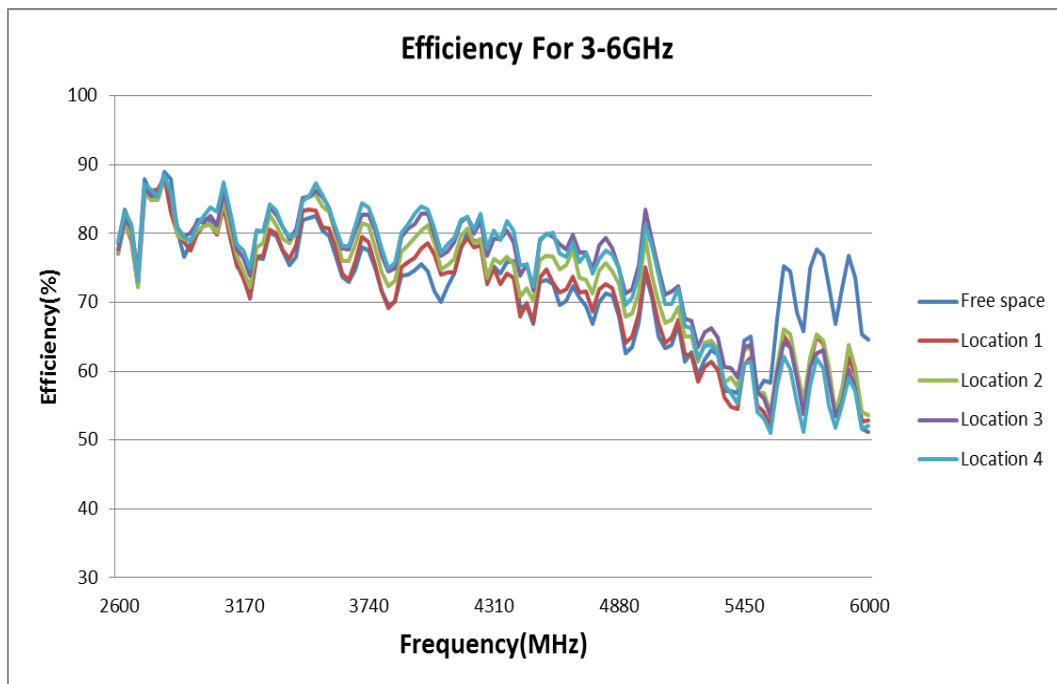


FIGURE 4.3.2 RETURN LOSS OF ANTENNA 3-6 GHZ BAND AT FOUR LOCATIONS WITH SAME PLANE GROUND

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 9 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22

5.0 RADIATION PATTERN

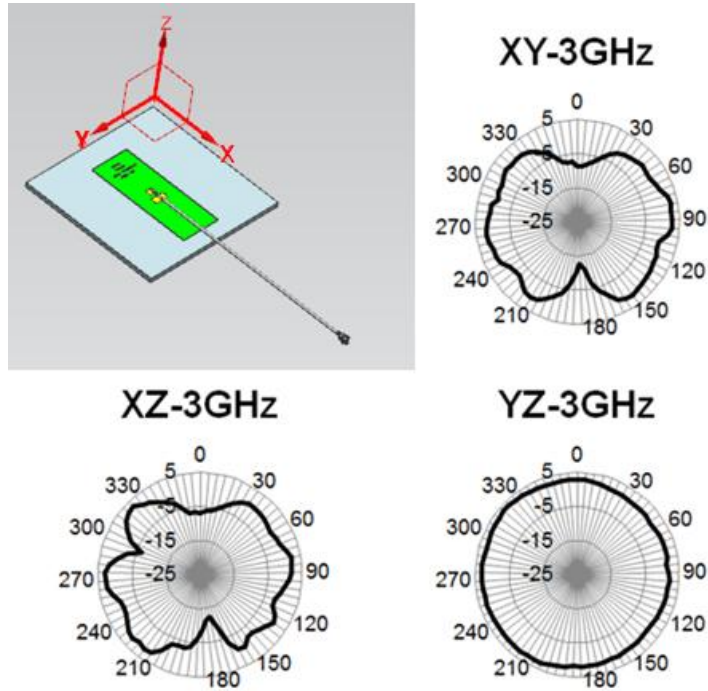


Figure 5.1 Radiation Pattern of antenna at 3GHz in Free space

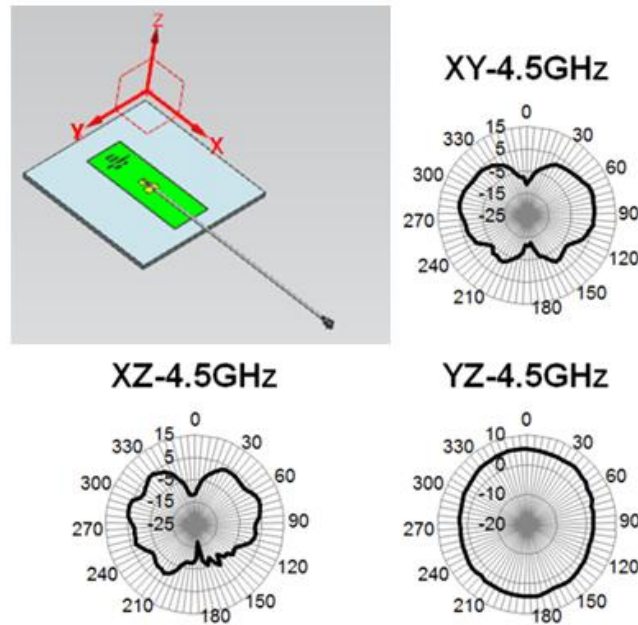


Figure 5.2 Radiation Pattern of antenna at 4.5GHz in Free space

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 10 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22

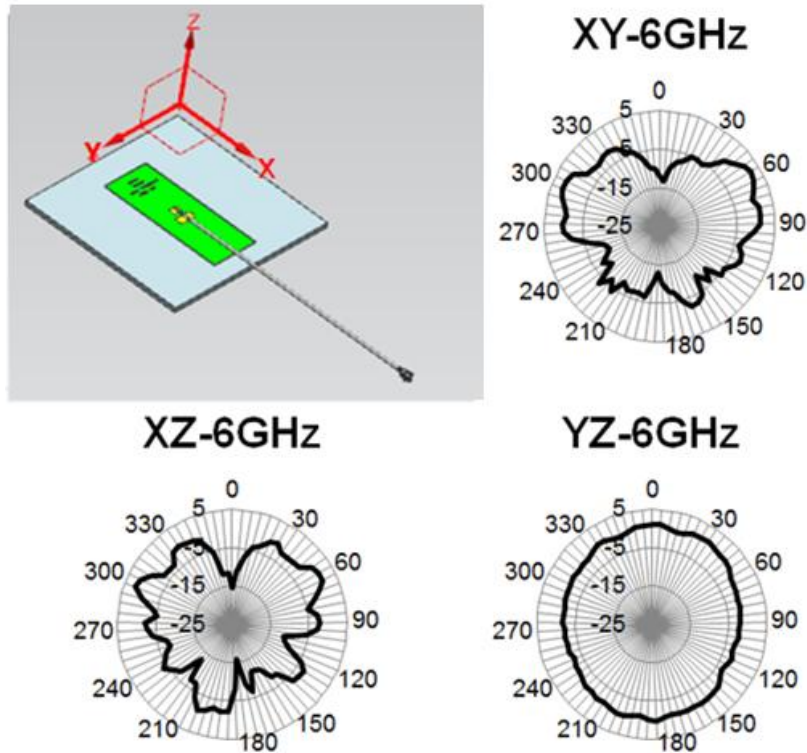


Figure 5.3 Radiation Pattern of antenna at 6GHz in Free space

6.0 THE ANTENNA PERFORMANCE VARIATION WITH CABLE LENGTH

6.0.1 CABLE LOSS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT	
			3GHz~5GHz	5GHz~6GHz
6.0.1.1	Attenuation	1m cable. Measured by VNA5071C	≤4dB/m	≤5dB/m

6.0.2 CABLE LENGTH AFFECT THE ANTENNA PERFORMANCE

Balance antenna resonance is insensitive by cable's length, but the cable's loss will affect the total efficiency. Refer to 6.0.1

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 11 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22



APPLICATION SPECIFICATION

6.0.3 FOR EXAMPLE

Frequency (MHz)	100mm cable		Cable Loss	300mm cable	
	Efficiency (dB)	Efficiency (%)		Efficiency (dB)	Efficiency (%)
	X		X-LOSS=Y	Y	
3000	-0.86	82.01	0.2m*4dB/m	-1.66	68.22
3050	-0.92	80.88		-1.72	67.27
3140	-1.24	75.24		-2.04	62.58
3230	-1.17	76.40		-1.97	63.54
3320	-0.99	79.69		-1.79	66.29
3410	-1.16	76.58		-1.96	63.69
3500	-0.83	82.55		-1.63	68.66
3590	-1.15	76.80		-1.95	63.88
3680	-1.26	74.86		-2.06	62.26
3770	-1.26	74.90		-2.06	62.30
3860	-1.54	70.09		-2.34	58.30
3950	-1.27	74.69		-2.07	62.13
4040	-1.45	71.63		-2.25	59.58
4130	-1.30	74.19		-2.10	61.71
4220	-1.03	78.84		-1.83	65.58
4310	-1.24	75.21		-2.04	62.55
4400	-1.19	76.03		-1.99	63.24
4490	-1.75	66.87		-2.55	55.62
4580	-1.39	72.58		-2.19	60.37
4670	-1.40	72.40		-2.20	60.22
4760	-1.75	66.90		-2.55	55.65
4850	-1.48	71.04		-2.28	59.09
4940	-1.97	63.49		-2.77	52.81
5030	-1.51	70.70	0.2m*5dB/m	-2.51	56.16
5120	-1.95	63.86		-2.95	50.72
5210	-2.02	62.82		-3.02	49.90
5300	-2.00	63.12		-3.00	50.14
5390	-2.44	57.06		-3.44	45.32
5480	-1.87	65.04		-2.87	51.66
5570	-2.34	58.32		-3.34	46.33
5660	-1.28	74.44		-2.28	59.13
5750	-1.25	75.01		-2.25	59.58
5840	-1.41	72.30		-2.41	57.43
5930	-1.15	76.71		-2.15	60.94
6000	-1.90	64.57		-2.90	51.29

- The data is just for your reference, all accurate performance should be according to the test results in the OTA chamber.

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 12 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22

7.0 ASSEMBLY GUIDELINES

During the assembly of the antenna in a device, the cable needs to be positioned away from the antenna PCB. The antenna cable should not be close to the antenna PCB.

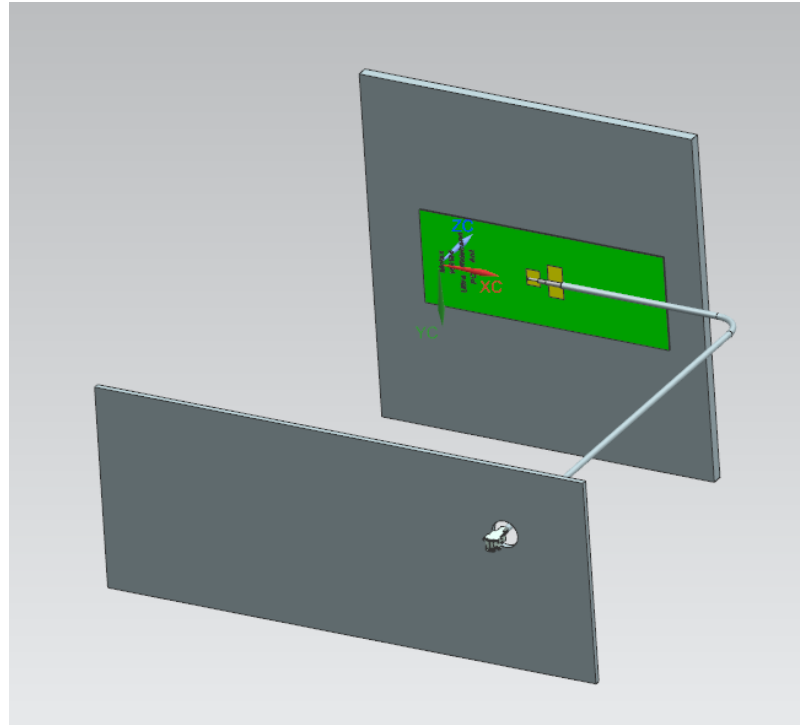


FIGURE 7.1 ASSEMBLY GUIDELINE

REVISION: B	ECR/ECN INFORMATION: EC No: ABU2016-0062 DATE: 2016/02/22	TITLE: Ultra Wideband PCB Antenna Application Specification	SHEET No. 13 of 13
DOCUMENT NUMBER: AS-146184-0100	CREATED / REVISED BY: LiuHai 2016/02/22	CHECKED BY: Ryan Liu 2016/02/22	APPROVED BY: Welson Tan 2016/02/22