

Solid State Drive HG6 Series

Key Features

- Hot-Plug/OS-Aware Hot Removal
- ClickConnect (a latch solution for internal cabled system application) supported (2.5-inch only)
- Deterministic Zeroing TRIM supported
- SED model supports TCG OPAL ver. 2.0 and Wipe Technology based on AES 256 hardware
- WWN (World Wide Name) supported
- Strong & highly-efficient ECC named QSBC™*1
- Serial ATA DIPM (Device Initiated Power Management), HIPM (Host Initiated Power Management) and Device Sleep are supported for reduced power consumption
- Read only mode supported for emergency

NOTE:*1) QSBC is a trademark of Toshiba Corporation

Applications

- For General-purpose notebook PCs

Specifications and Features



Form Factor	2.5-inch (9.5 mmH)	2.5-inch (7.0 mmH)	mSATA™*1 Module	M.2 2280-D2 (Double-sided)	M.2 2280-S2 (Single-sided)
Connector Type	Standard SATA		mSATA™*1	M.2 B-M	
Memory	TOSHIBA MLC NAND Flash Memory				
Interface *2	ACS-2, SATA revision 3.1 1.5/3/6 Gbit/s				
Capacity *2	60/128/256/512 GB		60/128/256/512 GB		128/256 GB
Performance *2*3	Sequential Read: up to 534 MB/s{510 MiB/s} Sequential Write: up to 482 MB/s{460 MiB/s}				
Supply Voltage	5.0 V ±5 %		3.3 V ±5 %		
Power Consumption	Active: 3.3 W typ. Idle: 125 mW typ.		Active: 3.2 W typ. Idle: 65 mW typ.		
Temperature	Operating: 0 °C - 70 °C (case temperature) Non-operating: -40 °C – 85 °C		Operating: 0 °C - 80 °C (components temperature) Non-operating: -40 °C – 85 °C		
Shock	14.7 km/s ² {1500 G} at 0.5 ms				
Vibration	Operating / Non-operating: 196 m/s ² {20 G} at 10-2,000 Hz				
Reliability	Mean Time to Failure (MTTF): 1,500,000 hours Product Life: Approximately 5 years				
Size	100.0 mm x 69.85 mm x 9.5 mm	100.0 mm x 69.85 mm x 7.0 mm	50.95 mm x 30.0 mm x 3.95 mm	80.0 mm x 22.0 mm x 3.58 mm	80.0 mm x 22.0 mm x 2.23 mm
Weight	51 - 55 g typ.	49 - 53 g typ.	7.3 - 7.7 g typ.	7.0 - 9.3 g typ.	6.4 - 6.6 g typ.
More Features	<ul style="list-style-type: none"> • Translation mode which enables any drive configuration • 28-bit LBA mode commands and 48-bit LBA mode commands support • Automatic retries and corrections for read errors • NCQ (Native Command Queuing) function supported 				
Compliance	UL, CSA, TÜV, KC, BSMI, CE, C-Tick				

*1) mSATA™ is a trademark of Serial ATA International Organization

*2) 1 MB = 1,000,000 bytes, 1 GB = 1,000,000,000 bytes, 1 Gbit = 1,000,000,000 bits

*3) 1 MiB (mebibytes) = 2²⁰ bytes = 1,048,576 bytes

Products and specifications discussed herein are for reference purposes only and are subject to change without notice. All information discussed herein is provided on an "as is" basis, without warranties of any kind. Before creating and producing designs and using, customers must refer to and comply with the latest versions of the product specifications.

Ordering Information

<u>THN</u>	<u>SX</u>	<u>X</u>	<u>XXXG</u>	<u>X</u>	<u>X</u>	<u>X</u>
1	2	3	4	5	6	7

1. Model Name THN: Toshiba NAND drive
2. Model Type SN: Non-SED, SF: SED
3. Controller Type J: Type J
4. Capacity 060G / 128G / 256G / 512G / ...
 060G is 60 GB, 128G is 128 GB, 256G is 256 GB and 512G is 512 GB
 (1 GB = 1,000,000,000 bytes)
5. Form Factor B: 2.5-inch case (9.5 mm height), C: 2.5-inch case (7.0 mm height),
 A/M: mSATA Module type, 8/V/D: M.2 2280 Module type
6. Host I/F Type S: Standard SATA, C: mSATA, N: M.2 B-M SATA type
7. NAND Type U: MLC

Product Line Up

Product Number	Capacity	Form Factor	Note
THNSNJ060GBSU	60 GB	2.5-inch 9.5 mm case	Non-SED
THNSNJ128GBSU	128 GB		Non-SED
THNSNJ256GBSU	256 GB		Non-SED
THNSNJ512GBSU	512 GB		Non-SED
THNSNJ060GCSU	60 GB	2.5-inch 7.0 mm case	Non-SED
THNSNJ128GCSU	128 GB		Non-SED
THNSNJ256GCSU	256 GB		Non-SED
THNSNJ512GCSU	512 GB		Non-SED
THNSNJ060GMCU	60 GB	mSATA module	Non-SED
THNSNJ128GMCU	128 GB		Non-SED
THNSNJ256GMCU	256 GB		Non-SED
THNSNJ512GACU	512 GB		Non-SED
THNSNJ060G8NU (D2) *1	60 GB	M.2 2280 module	Non-SED
THNSNJ128G8NU (D2) *1	128 GB		Non-SED
THNSNJ128GVNU (S2) *2	256 GB		Non-SED
THNSNJ256G8NU (D2) *1			Non-SED
THNSNJ256GVNU (S2) *2	512 GB		Non-SED
THNSFJ060GBSU	60 GB	2.5-inch 9.5 mm case	SED
THNSFJ128GBSU	128 GB		SED
THNSFJ256GBSU	256 GB		SED
THNSFJ512GBSU	512 GB		SED
THNSFJ060GCSU	60 GB	2.5-inch 7.0 mm case	SED
THNSFJ128GCSU	128 GB		SED
THNSFJ256GCSU	256 GB		SED
THNSFJ512GCSU	512 GB		SED
THNSFJ060GMCU	60 GB	mSATA module	SED
THNSFJ128GMCU	128 GB		SED
THNSFJ256GMCU	256 GB		SED
THNSFJ512GACU	512 GB		SED
THNSFJ060G8NU (D2) *1	60 GB	M.2 2280 module	SED
THNSFJ128G8NU (D2) *1	128 GB		SED
THNSFJ128GVNU (S2) *2	256 GB		SED
THNSFJ256G8NU (D2) *1			SED
THNSFJ256GVNU (S2) *2	512 GB		SED
THNSFJ512GDNU (D2) *1	512 GB		SED

*1) Double Side

*2) Single Side

Contents

Ordering Information.....	2
Product Line Up	3
Contents.....	4
1. General Description	5
2. Product Specifications	5
2.1. Capacity	5
2.2. Performance	5
3. Electrical Characteristics	6
3.1. Supply Voltage	6
3.2. Power Consumption	6
4. Environmental Conditions	7
4.1. Temperature and Humidity.....	7
4.2. Shock and Vibration.....	7
5. Compliance	8
6. Reliability	8
7. Mechanical Specifications.....	9
7.1. 2.5-inch Case (9.5 mm/7.0 mm)	9
7.2. mSATA Module.....	11
7.3. M.2 2280 Module	13
8. Interface Connector	14
8.1. 2.5-inch Case (9.5 mm/7.0 mm)	14
8.2. mSATA Module.....	15
8.3. M.2 2280 Module	17
9. Command Descriptions.....	19
10. Revision History	23
RESTRICTIONS ON PRODUCT USE	24

1. General Description

The TOSHIBA SSD HG series is a memory storage device using NAND Flash Memories, which has no mechanical moving parts and provides high performance and reliability compare to Hard Disk Drive.

The drive features an ACS-2 and Serial ATA revision 3.1 interface embedded controller that requires a simplified adapter board for interfacing to a Serial ATA or Serial ATA compatible bus. The drive is distinctive for its small and light body.

2. Product Specifications

2.1. Capacity

Table 2-1. User Addressable Sectors in LBA Mode

Capacity	Total Number of User Addressable Sectors in LBA Mode
60 GB	117,231,408
128 GB	250,069,680
256 GB	500,118,192
512 GB	1,000,215,216

NOTE: 1 GB (Gigabyte) = 1,000,000,000 bytes

Bytes per sector: 512 bytes

2.2. Performance

Table 2-2. Interface Speed and Data Transfer Rate in Read/Write

Parameter	Transfer Rate		
	THNSNJ060GBSU THNSNJ060GCSU THNSNJ060GMCU THNSNJ060G8NU	THNSNJ128GBSU THNSNJ128GCSU THNSNJ128GMCU THNSNJ256GMCU THNSNJ128G8NU THNSNJ128GVNU THNSNJ256G8NU THNSNJ256GVNU	THNSNJ256GBSU THNSNJ512GBSU THNSNJ256GCSU THNSNJ512GCSU THNSNJ512GACU THNSNJ512GDNU
Interface Speed	6 Gbit/s Max.		
Sequential Read *1	up to 534 MB/s {510 MiB/s}		
Sequential Write *1	up to 450 MB/s {430 MiB/s}	up to 471 MB/s {450 MiB/s}	up to 482 MB/s {460 MiB/s}

NOTE: *1) Under the condition of measurement with 128 KiB unit sequential access

(1 KiB = 1024 bytes)

3. Electrical Characteristics

3.1. Supply Voltage

Table 3-1. Supply Voltage

	2.5-inch Case (9.5 mm/7.0 mm)	mSATA / M.2 2280 Module
Allowable voltage	5.0 V ±5 %	3.3 V ±5 %
Allowable noise/ripple	100 mV p-p or less	
Allowable supply rise time	2 –100 ms	

NOTE: These drives have over current protection circuit. (Rated current: 3.15A)

3.2. Power Consumption

Table 3-2. Power Consumption in 2.5-inch Case Type

Operation (Ta *1=25°C)	2.5-inch Case (9.5 mm/7.0 mm)			
	THNSNJ060GBSU THNSNJ060GCSU	THNSNJ128GBSU THNSNJ128GCSU	THNSNJ256GBSU THNSNJ256GCSU	THNSNJ512GBSU THNSNJ512GCSU
Read *2	2.1 W typ.	2.5 W typ.	2.7 W typ.	3.0 W typ.
Write *2	2.1 W typ.	2.5 W typ.	3.2 W typ.	3.3 W typ.
Idle *3 *4	125 mW typ.	125 mW typ.	125 mW typ.	125 mW typ.
Standby *3 *4	120 mW typ.	120 mW typ.	120 mW typ.	120 mW typ.
Sleep *3	120 mW typ.	120 mW typ.	120 mW typ.	120 mW typ.
DevSleep	5 mW max.	5 mW max.	5 mW max.	5 mW max.

Table 3-3. Power Consumption in mSATA / M.2 2280 Module Type

Operation (Ta *1=25°C)	mSATA / M.2 2280 Module			
	THNSNJ060GMCU THNSNJ060G8NU	THNSNJ128GMCU THNSNJ128G8NU THNSNJ128GVNU	THNSNJ256GMCU THNSNJ256G8NU THNSNJ256GVNU	THNSNJ512GACU THNSNJ512GDNU
Read *2	2.1 W typ.	2.4 W typ.	2.5 W typ.	2.9 W typ.
Write *2	2.0 W typ.	2.4 W typ.	2.5 W typ.	3.2 W typ.
Idle *3 *4	65 mW typ.	65 mW typ.	65 mW typ.	65 mW typ.
Standby *3 *4	60 mW typ.	60 mW typ.	60 mW typ.	60 mW typ.
Sleep *3	60 mW typ.	60 mW typ.	60 mW typ.	60 mW typ.
DevSleep	5 mW max.	5 mW max.	5 mW max.	5 mW max.

NOTE:

*1) Ambient Temperature.

*2) The values are specified at the condition causing maximum power consumption.

*3) The values are based on using SATA power management features. The Slumber mode is used for the power consumption measurements.

*4) The drive may internally write to NAND flash memory, while the drive is in idle or standby. Therefore, drive power consumption may temporarily change up to write power.

4. Environmental Conditions

4.1. Temperature and Humidity

Table 4-1. Temperature

Condition	Range		Gradient
	2.5-inch Case	mSATA / M.2 2280 Module	
Operating *1	0 °C (Tc) – 70 °C (Tc)	0°C (Tc) – 80°C (Tc)	30 °C (Ta)/h Max.
Non-operating	-40 °C – 85 °C		30 °C/h Max.
Under Shipment *2	-40 °C – 85 °C		30 °C/h Max.

NOTE: *1) Ta: Ambient Temperature, Tc: Case or Components Temperature

*2) Packaged in Toshiba's original shipping package

Table 4-2. Humidity

Condition	Range
Operating	8 % – 90 % R.H. (No condensation)
Non-operating	8 % – 95 % R.H. (No condensation)
Under Shipment *1	5 % – 95 % R.H.

NOTE: *1) Packaged in Toshiba's original shipping package

4.2. Shock and Vibration

Table 4-3. Shock

Condition	Range
Operating	14.7 km/s ² {1500 G}, 0.5 ms, half sine wave
Non-operating	
Under Shipment *1	100 cm free drop

NOTE:

*1) Apply shocks in each direction of the drive's three mutually perpendicular axes, one axis at a time.

Packaged in Toshiba's original shipping package.

Table 4-4. Vibration

Condition	Range
Operating	196 m/s ² {20 G} Peak, 10 - 2,000 Hz (20 minutes per axis) x 3 axis
Non-operating	

5. Compliance

TOSHIBA SSD HG series complies with the following.

Table 5-1. Compliance

Mark Name	Description	Region
UL (Underwriters Laboratories)	UL 60950-1	USA
CSA (Canadian Standard Association) *Included UL logo mark	CSA-C22.2 No.60950-1	Canada
TÜV (Technischer Überwachungs Verein)	EN 60950-1	Germany
KC	KN22 KN24	Korea
BSMI (Bureau of Standards, Metrology and Inspection)	CNS13438(CISPR Pub. 22) Class B	Taiwan
CE	EN 55022, EN 55024	Europe
C-Tick	AS/NZS CISPR Pub. 22 Class B	Australia, New Zealand

6. Reliability

Table 6-1. Reliability

Parameter	Value
Mean Time to Failure	1,500,000 hours
Product Life	Approximately 5 years

7. Mechanical Specifications

7.1. 2.5-inch Case (9.5 mm/7.0 mm)

Table 7-1. Weight and Dimensions

	Model	Weight	Width	Height	Length
9.5 mm	THNSNJ060GBSU THNSNJ128GBSU	51 g typ.	69.85 mm	9.5 mm	100.0 mm
	THNSNJ256GBSU THNSNJ512GBSU	55 g typ.			
7.0 mm	THNSNJ060GCSU THNSNJ128GCSU	49 g typ.	69.85 mm	7.0 mm	100.0 mm
	THNSNJ256GCSU THNSNJ512GCSU	53 g typ.			

Figure 7-1. 2.5-inch Case (9.5 mm/7.0 mm) Drive Dimension

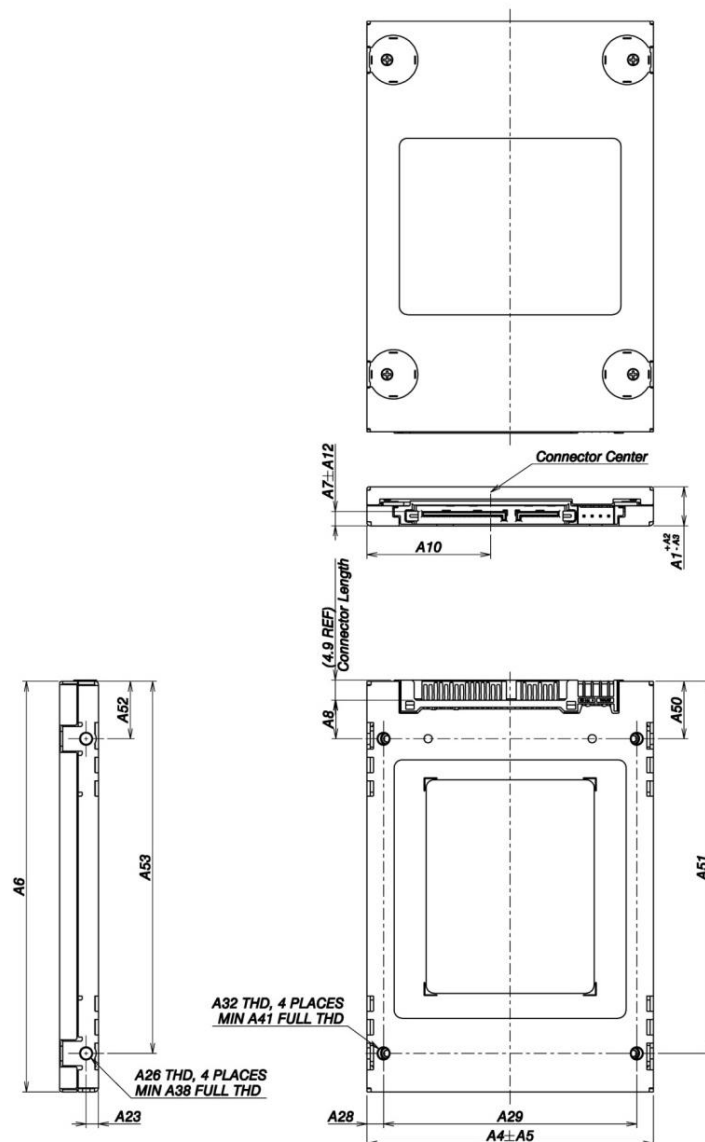


Table 7-2. Dimensions

Dimension	SFF-8200 Rev2.0 * ¹		Toshiba SSD	
	SFF-8201 Rev2.4			
	SFF-8223 Rev2.5		(Differences only)	
	Millimeters (9.5 mm/7.0 mm)	Inches (9.5 mm/7.0 mm)	Millimeters	Inches
A1	9.50/7.00	0.374/0.276		
A2	0.20/0.00	0.008/0.000		
A3	0.20/0.50	0.008/0.020		
A4	69.85	2.750		
A5	0.25	0.010		
A6 * ²	100.45 *	3.955 *	100.00±0.41	3.937±0.016
A7	3.5	0.138		
A8	9.40	0.370	9.40±0.51	0.370±0.020
A10 * ³	-	-	30.125±0.28	1.186±0.011
A12	0.38	0.015		
A23	3.00	0.118	3.00±0.20	0.118±0.007
A26	M3	N/A		
A28	4.07	0.160	4.07 +0.295/-0.305	0.060 +0.011/-0.012
A29	61.72	2.430	61.72±0.25	2.430±0.010
A32	M3	N/A		
A38	3 #	3 #		
A41	2.5 #	2.5 #		
A50 * ²	14.00	0.551	14.00±0.25	0.551±0.010
A51 * ²	90.60	3.567	90.60±0.30	3.567±0.012
A52 * ²	14.00	0.551	14.00±0.25	0.551±0.010
A53 * ²	90.60	3.567	90.60±0.30	3.567±0.012

* = maximum

= minimum number of threads

NOTE:

*1) SFF-8200: Small Form Factor Standard

*2) PCA, Connector not included


*3) Connector Center defined the same as SFF-8223 All

7.2. mSATA Module

Table 7-3. Weight and Dimensions

Model	Weight	Width	Height	Length
THNSNJ060GMCU THNSNJ128GMCU	7.3 g typ.	30.0 mm	3.95 mm	50.95 mm
THNSNJ256GMCU THNSNJ512GACU	7.7 g typ.			

Figure 7-2. mSATA Module Drive Dimension

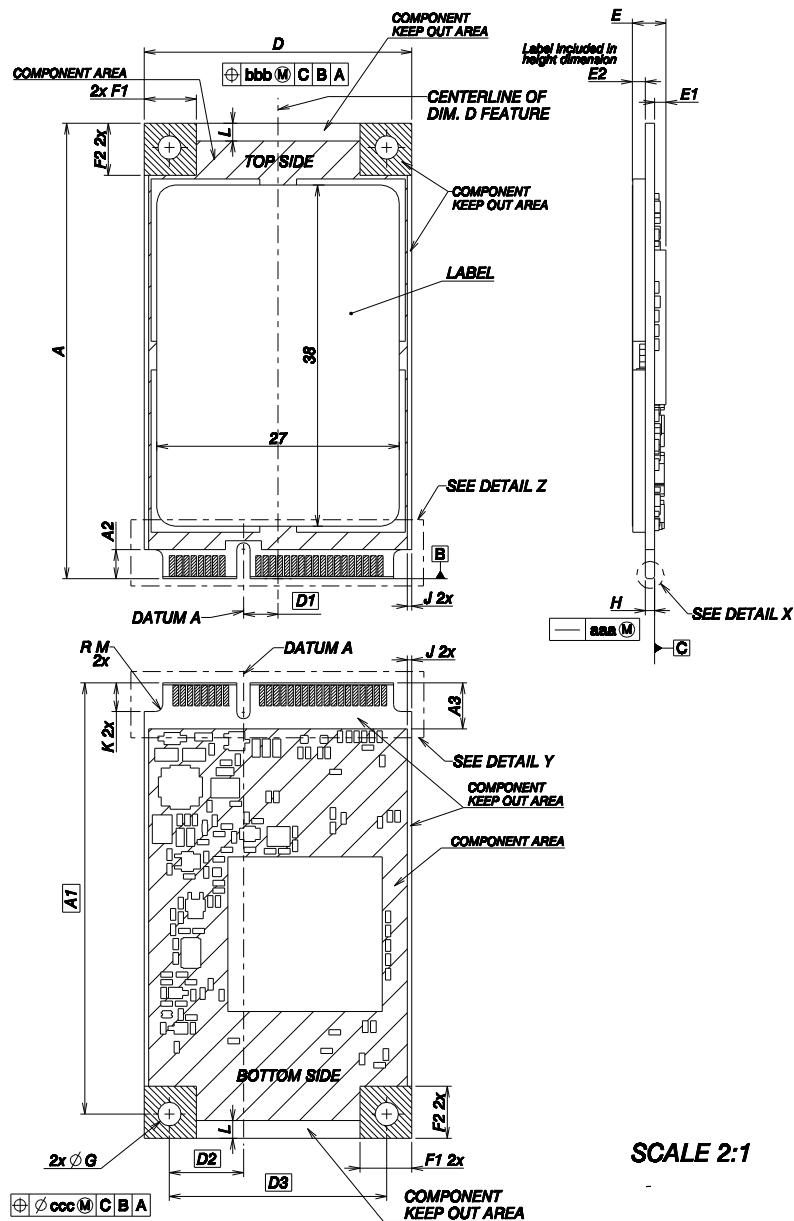

NOTE: The 512 GB capacity has different outlook appearance.

Table 7-4. Dimensions and Tolerances *1

JEDEC MO-300 B mSATA FULL SIZE VARIATION A				TOSHIBA
SYMBOL	MIN	NOM	MAX	(Differences only)
A	50.65	50.80	50.95	
A1	48.05 BASIC			
A2	3.20	-	-	
A3	5.10	-	-	
D	29.70	29.85	30.00	
D1	3.85 BASIC			
D2	8.25 BASIC			
D3	24.20 BASIC			
E	-	-	4.85	3.95 max.
E1	-	-	1.35	
E2	-	-	2.40	1.6 max.
F1	5.65	5.80	5.95	
F2	5.65	5.80	5.95	
G	2.50	2.60	2.70	
H	0.90	1.00	1.10	
J	0.50	-	-	
K	3.20	-	-	
L	2.00	-	-	
M	-	-	0.80	
P1	-	-	0.25	
P2	-	-	0.25	
aaa	0.22			
bbb	0.10			
ccc	0.10			

NOTE:

*1) Thickness applies across tabs and includes plating and/or metallization.


Unit: mm

7.3. M.2 2280 Module

Table 7-5. Weight and Dimensions

Model	Weight	Width	Height	Length
THNSNJ060G8NU(D2)	7.0 g typ.	22.0 mm	3.58 mm	80.0 mm
THNSNJ128GVNU(S2)	6.4 g typ.		2.23 mm	
THNSNJ128G8NU(D2)	7.0 g typ.		3.58 mm	
THNSNJ256GVNU(S2)	6.6 g typ.		2.23 mm	
THNSNJ256G8NU(D2)	7.1 g typ.		3.58 mm	
THNSNJ512GDNU(D2)	9.3 g typ.		3.58 mm	

Figure 7-3. M.2 2280 Module Drive Dimension

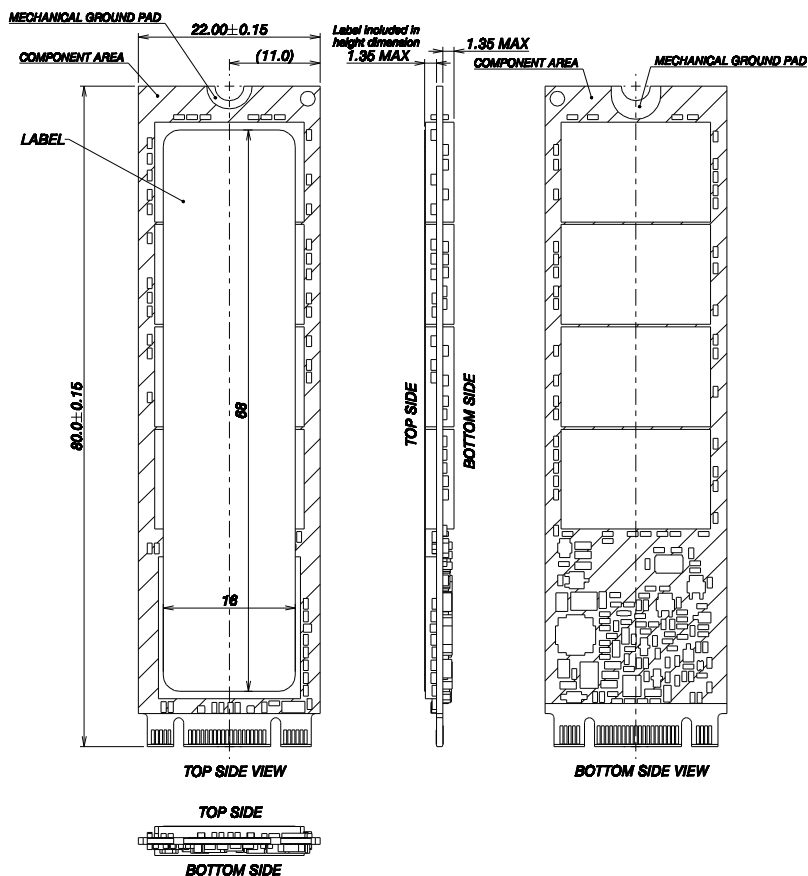

Unit: mm

8. Interface Connector

8.1. 2.5-inch Case (9.5 mm/7.0 mm)

Figure 8-1. 2.5-inch Case Serial ATA Interface Connector

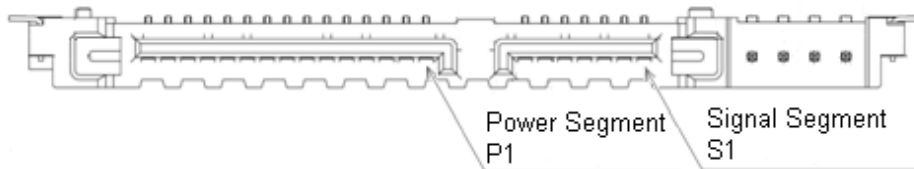


Table 8-1. 2.5-inch Case Drive Connector Pin Assignment *1

Signal segment key			
Signal Segment	S1	GND	2 nd Mate
	S2	A+	Differential Signal Pair A (Device Rx), 3 rd Mate
	S3	A-	
	S4	GND	
	S5	B-	Differential Signal Pair B (Device Tx), 3 rd Mate
	S6	B+	
	S7	GND	2 nd Mate
Signal segment "L"			
Central connector polarizer			
Power segment "L"			
Power Segment	P1	Retired *2	
	P2	Retired *2	
	P3	DEVSLP *2	Enter/Exit DevSleep
	P4	GND	1 st Mate
	P5	GND	2 nd Mate
	P6	GND	2 nd Mate
	P7	V5	5 V power, pre-charge *4, 2 nd Mate
	P8	V5	5 V power, 3 rd Mate
	P9	V5	5 V power, 3 rd Mate
	P10	GND	2 nd Mate
	P11	DAS/DSS *3	Drive Activity Signal, 3 rd Mate
	P12	GND	1 st Mate
	P13	V12	12 V power, pre-charge, 2 nd Mate (Unused)
	P14	V12	12 V power (Unused), 3 rd Mate
	P15	V12	12 V power (Unused), 3 rd Mate
Power segment key			

U1	N.C.	Not connected
U2	TX	For test use, Not connected
U3	UX	For test use, Not connected
U4	GND	

NOTE: *1) The Mate orders are for backplane usage. Hot-Plug and OS-Aware Hot Removal are supported when using with a backplane connector. *2) Previously, 3.3 V was assigned to pins P1, P2 and P3 by Serial ATA International Organization. *3) DAS signal is option. DSS signal is not used for this drive. *4) Direct connect to non pre-charge pins.

8.2. mSATA Module

Figure 8-2. mSATA Interface Connector

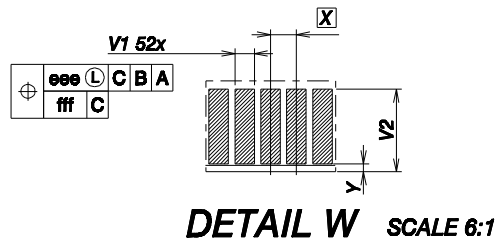

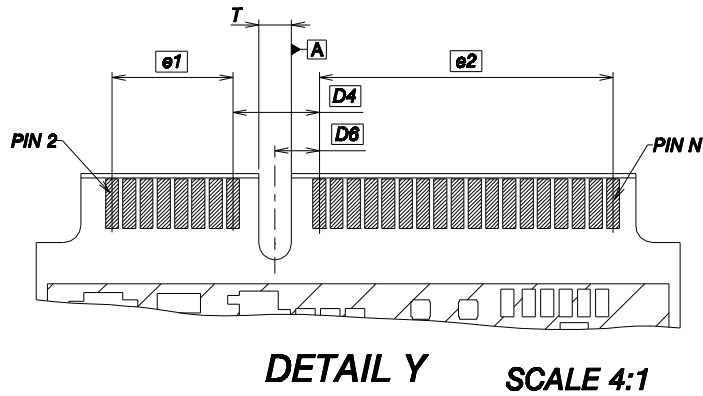
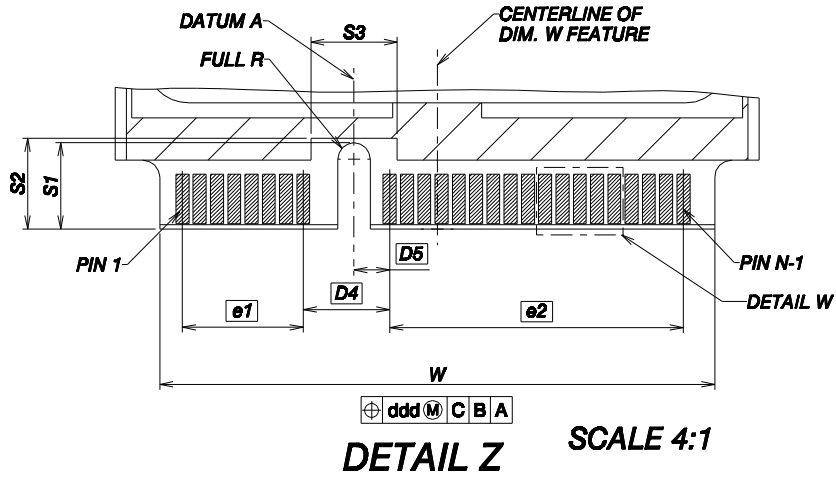


Table 8-2. Pin Assignment on mSATA Connector

Pin #	Name	Description	Pin #	Name	Description
1	Reserved	NC	2	+3.3V	3.3V Source
3	Reserved	NC	4	GND	Return Current Path
5	Reserved	NC	6	+1.5V	1.5V Source(Unused)
7	Reserved	NC	8	Reserved	NC
9	GND	Return Current Path	10	Reserved	NC
11	Reserved	NC	12	Reserved	NC
13	Reserved	NC	14	Reserved	NC
15	GND	Return Current Path	16	Reserved	NC
Key					
17	Reserved	NC	18	GND	Return Current Path
19	Reserved	NC	20	Reserved	NC
21	GND	Return Current Path	22	Reserved	NC
23	B+	Host Receiver Differential Signal Pair	24	+3.3V	3.3V Source
25	B-		26	GND	Return Current Path
27	GND	Return Current Path	28	+1.5V	1.5V Source(Unused)
29	GND	Return Current Path	30	Two Wire Interface	NC
31	A-	Host Transmitter Differential Signal Pair	32		NC
33	A+		34	GND	Return Current Path
35	GND	Return Current Path	36	Reserved	NC
37	GND	Return Current Path	38	Reserved	NC
39	+3.3V	3.3V source	40	GND	Return Current Path
41	+3.3V	3.3V source	42	Reserved	NC
43	Device Type *1	NC	44	DEVSLP	Enter/Exit DevSleep
45	Vendor	No connect at Host side	46	Reserved	NC
47	Vendor	No connect at Host side	48	+1.5V	1.5V Source(Unused)
49	DAS/DSS *2	Drive Activity Signal / Disable Staggered Spin-up	50	GND	Return Current Path
51	Presence *3	Presence Detection	52	+3.3V	3.3V Source

NOTE: *1) Given that non-mSATA devices ground P43, configurable shared-socket designs may use this pin to identify mSATA and non-mSATA devices.

*2) DAS signal is option. DSS signal is not used for this drive.

*3) Presence pin is connected to GND by device side. (220Ω Pull Down)

8.3. M.2 2280 Module

Figure 8-3. M.2 2280 Module Interface Connector

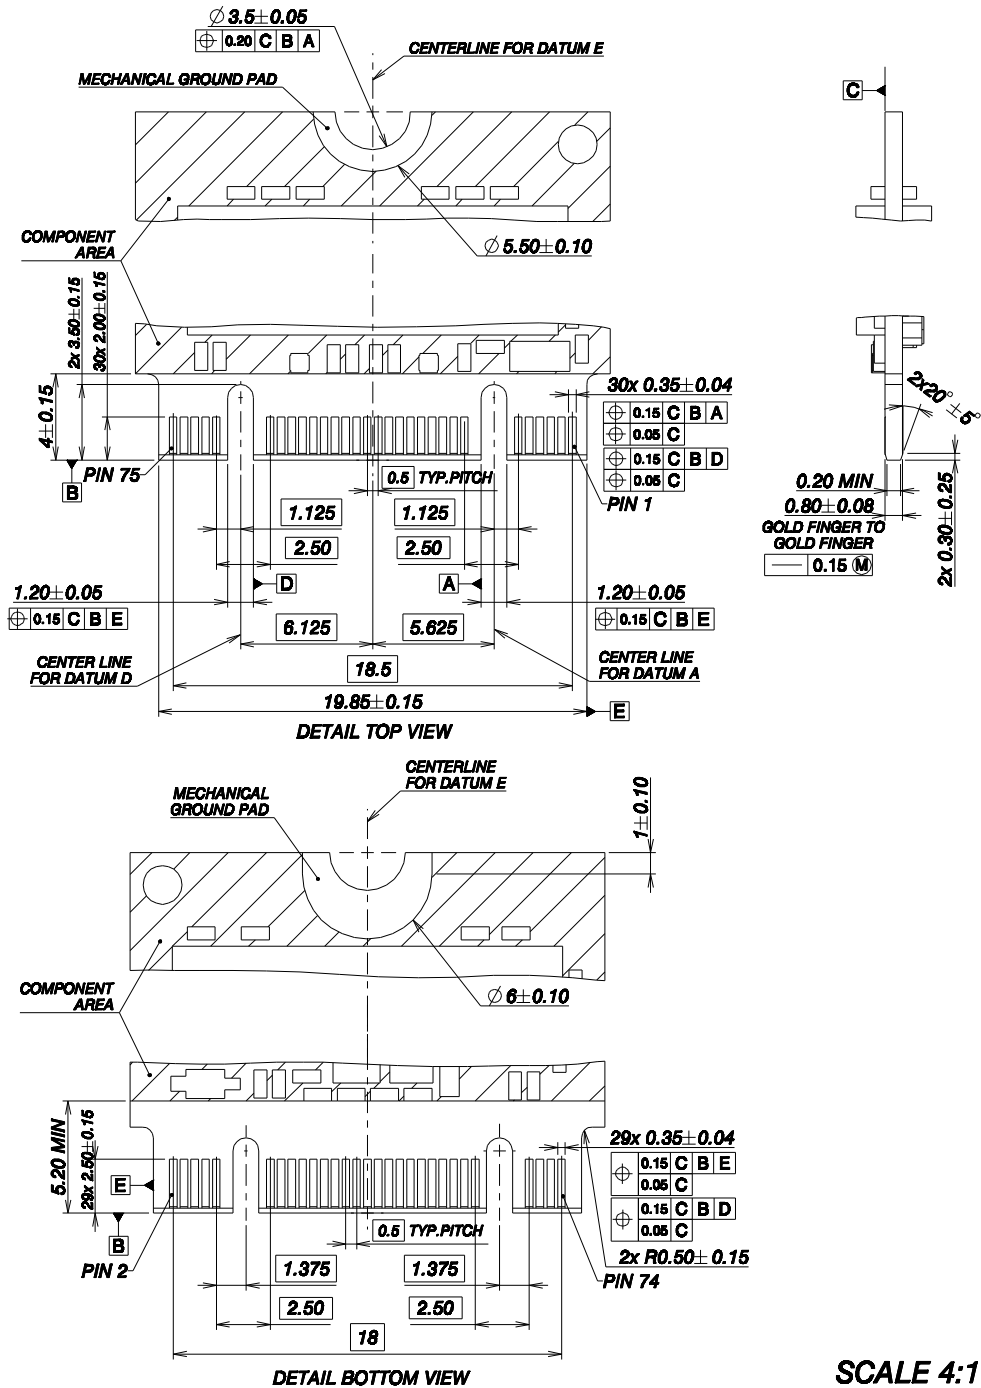


Table 8-3. Pin Assignment on M.2 2280 Module Connector

Pin #	Name	Description	Pin #	Name	Description
1	CONFIG_3	Defines module type(low)	2	+3.3V	3.3V Source
3	GND	GND	4	+3.3V	3.3V Source
5	Reserved	NC	6	Reserved	NC
7	Reserved	NC	8	Reserved	NC
9	Reserved	NC	10	DAS/DSS	Drive Activity Signal / Disable Staggered Spin-up
11	Reserved	NC	Notch		
Notch					
21	CONFIG_0	Defines module type(low)	20	Reserved	NC
23	Reserved	NC	22	Reserved	NC
25	Reserved	NC	24	Reserved	NC
27	GND	GND	26	Reserved	NC
29	Reserved	NC	28	Reserved	NC
31	Reserved	NC	30	Reserved	NC
33	GND	GND	32	Reserved	NC
35	Reserved	NC	34	Reserved	NC
37	Reserved	NC	36	Reserved	NC
39	GND	GND	38	DEVSLP	DEVSLP signal
41	B+	Host Receiver Differential Signal Pair	40	Reserved	NC
43	B-		42	Reserved	NC
45	GND	GND	44	Reserved	NC
47	A-	Host Transmitter Differential Signal Pair	46	Reserved	NC
49	A+		48	Reserved	NC
51	GND	GND	50	Reserved	NC
53	Reserved	NC	52	Reserved	NC
55	Reserved	NC	54	Reserved	NC
57	GND	GND	56	MFG1	Manufacturing pin. Must be a no-connect on the host board.
Notch			58	MFG2	
Notch			Notch		
67	Reserved	NC	68	Reserved	NC
69	CONFIG_1	Defines module type(low)	70	+3.3V	3.3V Source
71	GND	GND	72	+3.3V	3.3V Source
73	GND	GND	74	+3.3V	3.3V Source
75	CONFIG_2	Defines module type(low)			

9. Command Descriptions

Table 9-1. Supported ATA Command Set

Op-Code	Command Description	
00h	NOP	
06h	DATA SET MANAGEMENT	
10h	RECALIBRATE	
20h	READ SECTOR(S)	
21h	READ SECTOR(S) without retry	
24h	READ SECTOR(S) EXT	
25h	READ DMA EXT	
27h	READ NATIVE MAX ADDRESS EXT	
29h	READ MULTIPLE EXT	
2Fh	READ LOG EXT	
30h	WRITE SECTOR(S)	
31h	WRITE SECTOR(S) without retry	
34h	WRITE SECTOR(S) EXT	
35h	WRITE DMA EXT	
37h	SET MAX ADDRESS EXT	
39h	WRITE MULTIPLE EXT	
3Dh	WRITE DMA FUA EXT	
3Fh	WRITE LOG EXT	
40h	READ VERIFY SECTOR(S)	
41h	READ VERIFY SECTOR(S) without retry	
42h	READ VERIFY SECTOR(S) EXT	
45h	WRITE UNCORRECTABLE EXT	
45h	55h	Create a pseudo-uncorrectable error with logging
45h	AAh	Create a flagged error without logging
47h	READ LOG DMA EXT	
57h	WRITE LOG DMA EXT	
5Bh	TRUSTED NON-DATA (SED model only)	
5Ch	TRUSTED RECEIVE (SED model only)	
5Dh	TRUSTED RECEIVE DMA (SED model only)	
5Eh	TRUSTED SEND (SED model only)	
5Fh	TRUSTED SEND DMA (SED model only)	
60h	READ FPDMA QUEUED	
61h	WRITE FPDMA QUEUED	

Op-Code		Command Description
70h		SEEK
90h		EXECUTE DEVICE DIAGNOSTIC
91h		INITIALIZE DEVICE PARAMETERS
92h		DOWNLOAD MICROCODE
92h	03h	Download with offsets and save microcode for immediate and future use.
92h	07h	Download and save microcode for immediate and future use.
93h		DOWNLOAD MICROCODE DMA
93h	03h	Download with offsets and save microcode for immediate and future use.
93h	07h	Download and save microcode for immediate and future use.
B0h		SMART
B0h	D0h	SMART READ DATA
B0h	D1h	SMART READ ATTRIBUTE THRESHOLDS
B0h	D2h	SMART ENABLE/DISABLE ATTRIBUTE AUTOSAVE
B0h	D3h	SMART SAVE ATTRIBUTE VALUES
B0h	D4h	SMART EXECUTE OFF-LINE IMMEDIATE
B0h	D5h	SMART READ LOG
B0h	D6h	SMART WRITE LOG
B0h	D8h	SMART ENABLE OPERATIONS
B0h	D9h	SMART DISABLE OPERATIONS
B0h	DAh	SMART RETURN STATUS
B0h	DBh	SMART ENABLE/DISABLE AUTOMATIC OFF-LINE
B1h		DEVICE CONFIGURATION OVERLAY
B1h	C0h	DEVICE CONFIGURATION RESTORE
B1h	C1h	DEVICE CONFIGURATION FREEZE LOCK
B1h	C2h	DEVICE CONFIGURATION IDENTIFY
B1h	C3h	DEVICE CONFIGURATION SET
B1h	C4h	DEVICE CONFIGURATION IDENTIFY DMA
B1h	C5h	DEVICE CONFIGURATION SET DMA
B4h		SANITIZE DEVICE
B4h	00h	SANITIZE STATUS EXT
B4h	11h	CRYPTO SCRAMBLE EXT (SED model only)
B4h	12h	BLOCK ERASE EXT
B4h	20h	SANITIZE FREEZE LOCK EXT
C4h		READ MULTIPLE
C5h		WRITE MULTIPLE
C6h		SET MULTIPLE MODE

Op-Code		Command Description	
C8h		READ DMA	
C9h		READ DMA without retry	
CAh		WRITE DMA	
CBh		WRITE DMA without retry	
CEh		WRITE MULTIPLE FUA EXT	
E0h		STANDBY IMMEDIATE	
E1h		IDLE IMMEDIATE	
E2h		STANDBY	
E3h		IDLE	
E4h		READ BUFFER	
E5h		CHECK POWER MODE	
E6h		SLEEP	
E7h		FLUSH CACHE	
E8h		WRITE BUFFER	
E9h		READ BUFFER DMA	
EAh		FLUSH CACHE EXT	
EBh		WRITE BUFFER DMA	
ECh		IDENTIFY DEVICE	
EFh		SET FEATURES	
EFh	02h	Enable volatile write cache	
EFh	03h	Set transfer mode	
EFh	05h	Enable APM feature set	
EFh	10h	Enable Serial ATA feature set	
EFh	10h	02h	Enable DMA Setup FIS Auto-Activate optimization
EFh	10h	03h	Enable Device-initiated interface power state (DIPM) transitions
EFh	10h	06h	Enable Software Settings Preservation(SSP)
EFh	10h	07h	Enable Device Automatic Partial to Slumber transitions
EFh	10h	09h	Enable Device Sleep
EFh	55h	Disable read look-ahead	
EFh	66h	Disable reverting to P-On default	
EFh	82h	Disable volatile write cache	
EFh	85h	Disable APM feature set	
EFh	90h	Disable Serial ATA feature set	
EFh	90h	02h	Disable DMA Setup FIS Auto-Activate optimization
EFh	90h	03h	Disable Device-initiated interface power state (DIPM) transitions
EFh	90h	06h	Software Settings Preservation(SSP)

Op-Code		Command Description	
EFh	90h	07h	Disable Device Automatic Partial to Slumber transitions
EFh	90h	09h	Disable Device Sleep
EFh	AAh		Enable read look-ahead
EFh	CCh		Enable reverting to P-On default
	F1h		SECURITY SET PASSWORD
	F2h		SECURITY UNLOCK
	F3h		SECURITY ERASE PREPARE
	F4h		SECURITY ERASE UNIT
	F5h		SECURITY FREEZE LOCK
	F6h		SECURITY DISABLE PASSWORD
	F8h		READ NATIVE MAX ADDRESS
	F9h		SET MAX ADDRESS
F9h	01h		SET MAX SET PASSWORD
F9h	02h		SET MAX LOCK
F9h	03h		SET MAX UNLOCK
F9h	04h		SET MAX FREEZE LOCK
F9h	05h		SET MAX SET PASSWORD DMA
F9h	06h		SET MAX UNLOCK DMA

10. Revision History

Rev.	Description	Date
1.0.6	Editorial Changes	Oct.22, 2014
1.0.5	Editorial Changes	Aug.8, 2014
1.0.4	Editorial Changes	Jul.16, 2014
1.0.3	Initial Release	Apr.25, 2014

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Product may include products subject to foreign exchange and foreign trade control laws.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS**