

User Guide – HT640 Series

v08/08

Professional submersible marine handheld transceivers

Common Information
(all models)



HT642
Entry



HT644
LCD



HT648
Entry GMDSS



HT649
LCD GMDSS

Introduction

This guide covers the 'basics' of your radio's operation. To meet your exact requirements the radio may have been customised by your Entel authorised dealer. These features will be explained in a separate guide issued by the dealer.

Common

Table of Contents

Common Information (all models)	Page
Certification	2
Radio / Battery Care	3
Battery Care / Communications	4
Packing List	5
Optional Accessories	5 & 6
Preparing Your Radio For Use	6 & 7
Using Your Radio HT642/HT648	8
Using Your Radio HT644/HT649	9

HT642	
Feature List	10
Controls & Indicators	11

HT644	
Feature List	12
Controls & Indicators	13
LCD Icons	14

HT648 (GMDSS)	
Feature List	16
Controls & Indicators	17

HT649 (GMDSS)	
Feature List	18
Controls & Indicators	19
LCD Icons	20

Certification

CE Compliance Statement

The HT64X series transceiver displays "CE" on the serial number label, indicating its compliance with the essential requirements of the EEC directive for Electromagnetic Compatibility.

Declaration of Conformity

We Entel UK Limited

OF:

4 Elstree Gate,
Elstree Way
Borehamwood
Hertfordshire
WD6 1JD
United Kingdom

Declare under our sole responsibility that the product:-
HT640 series VHF handheld transceiver

Serial Number _____

To which this declaration relates, is in accordance with directive 99/5/EC and conforms to the following standard or other nominative documents:-
EN 300 086-2 V1.1.1, EN 301 489-1 V1.5.1:2003, EN 60065:2002

Following provisions of the R&TTE directive.

M Austin



Radio care

Advice

- Do not use options or accessories not specified by Entel
- Ensure that the radio is used within the parameters for which it was designed
- Please switch the transceiver off before connecting optional accessories

Warning

Turn the transceiver off in the following locations:

- In explosive atmospheres (flammable gas, dust including metallic & grain powders etc)
- Whilst taking on fuel or while parked near a fuel station
- Near explosives or blasting sites

- In aircraft, medical institutions or near persons known to be wearing a pacemaker

Caution

- Do not disassemble or modify the transceiver for any reason
- Do not transmit while touching the antenna terminal or any exposed metallic parts of the aerial as this may result in a burn
- Please check and observe regulations in your country with regard to use whilst driving

End of Life Disposal

- When your Entel transceiver reaches the end of its useful life, please ensure that the unit is disposed of in an environmentally friendly way. For country specific information please see www.entel.co.uk/recycling.

Battery care

Introduction

Your Entel radio is supplied with a high performance Lithium-Ion (Li-Ion) battery.

These batteries:

- Extend talk time
- Reduce the battery's size and weight
- Do not suffer from 'memory effect' that reduces the life of Ni-Cad and NiMH batteries
- Have a low toxicity, therefore reducing the impact on the environment

Battery Pack Precautions

- Switch the transceiver OFF before charging
- Charge the battery pack before use
- Do not recharge the battery pack if it is already fully charged. This could lead to a premature battery replacement warning message. (See Battery Communications on page 4)

- Charge the battery in accordance with the instructions enclosed with your charger
- Do not charge the transceiver and/or battery pack if they are wet

The battery pack includes potentially hazardous components. Please:

- Do not disassemble or reconstruct battery
- Do not short-circuit the battery
- Do not incinerate or apply heat to the battery
- Do not immerse the battery in water unless attached securely to the radio or get it wet by other means
- Use only the specified charger and observe charging requirements
- Do not pierce the battery with any object or strike it with an instrument
- Do not use the battery pack if it is damaged in any way

Battery care / information

- Do not reverse-charge or reverse-connect the battery
- Do not touch a ruptured or leaking battery

If liquids from the battery get into your eyes, immediately:

Wash your eyes out with fresh water and avoiding rubbing them. Seek medical treatment.

Battery Pack

- If a battery is not to be used for an extended period of time (e.g. several months) remove the battery pack from the equipment and store in a cool and dry location (around 0°C) part charged. Do not fully discharge the battery before storage.
- Each charge cycle reduces the battery's life. Minimise the number of times you charge your battery especially in hotter environments which further shortens a battery's life.


GMDSS Battery (CLB750)

Your CLB750 GMDSS battery is a non rechargeable lithium ion battery. The battery is supplied with a security seal that must be removed before fitting to the radio. An expiry date is printed on the battery. Do not use this battery if past the expiry date. Replacement batteries are available from your local authorised dealer. If you require assistance where to purchase please contact Entel for details.


Under no circumstances must you attempt to recharge this battery

Battery Communications (exc CLB750 GMDSS battery)


Each battery used with your radio (excluding the HT644) has a microprocessor fitted, which logs the number of times your battery has been charged. On a portable radio with an LCD display, the number of times the battery has been charged, together with the remaining charge cycles available, will be shown during switch on (if not de-activated by your dealer).



The warranty on all batteries is 12 months from new, or 450 charge cycles, whichever is the sooner. After 420 cycles, at switch on the radio will emit a series of short tones, and on LCD models a waste bin icon will flash to alert you to the need to buy a new battery.



After 450 cycles, at switch on the radio will emit a series of long beeps, and LCD models the message will change to BATTERY COUNT EXCEEDED REPLACE BATTERY. The radio will continue to operate but its operational time may be reduced, eventually failing all together.



Note: only genuine Entel batteries should be used. Only genuine batteries offer the battery charge count feature informing you when the battery is reaching the end of its useful life. Customer satisfaction is assured as you can not be supplied with sub standard, potentially dangerous battery packs from 3rd party manufacturers, ensuring it delivers the expected capacity and endurance.

On HT series batteries a breathable membrane is used. This is clearly marked on the battery label. Piercing the membrane will allow water ingress to the battery, and will invalidate the warranty.

Packing List

- HT64X Transceiver
- CNB750E Rechargeable 1800mAh Li-Ion battery (May not be included with GMDSS)
- CLB750E Non rechargeable Li-Ion battery (GMDSS only)
- CBH750 Spring loaded belt clip
- CATXX Antenna CCA trickle charger included with certain models

Optional Accessories

Battery & Charger Options

CNB750E	Spare 1800mAh Lithium-Ion battery pack with rear clip
CLB750E	Spare 2000mAh Lithium-Ion non-rechargeable battery pack with rear clip (for GMDSS models only)
CSAHT	1-way intelligent rapid charger, 110-230v
CSBHT	6-way intelligent, rapid charger, 110-230v
CCA230	1-way trickle charger with 230V mains adapter
CCA110	1-way trickle charger with 110V mains adapter
CCA12	1-way trickle charger with cigar lighter lead, 12V DC operation

Carry Options

CFC750	HT7X2, HT7X3 & HT7X5 soft leatherette case finished in black with carry strap
CLC752	HT7X2 heavy duty black leather case with strap & belt loop
CLC753	HT7X3 & HT7X5 heavy duty black leather case with strap & belt loop
CLC756	HT7X6 heavy duty black leather case with strap & belt loop
CBH750	Spare spring loaded belt clip

Audio Accessory Options

CMP1/750	Compact medium duty speaker microphone with earpiece jack
CMP750	Heavy duty submersible speaker microphone
EHP9	D-shaped earpiece (plugs into CMP1/750 or CMP750 above)
Tattoo	Lightweight Bluetooth earpiece/microphone
X3	Durable, water resistant Bluetooth earpiece/microphone
M10	Ultra small Bluetooth earpiece/microphone
BTPTT	Small Bluetooth remote press to talk button
EA12/750	D-shaped earpiece with in-line PTT/microphone & VOX*
EA15/750	Earpiece microphone with transparent acoustic tube & VOX*
EA19/750	D-shaped earpiece with boom microphone and in-line PTT & VOX*
EHP750	D-Shaped earpiece (connects directly to radio)
EPT40/750	Bone conductive earpiece microphone with PTT
CXR5/750	Bone conductive skull microphone with in-line PTT
CXR16/750	D-shaped earpiece and throat microphone with in-line PTT

Optional Accessories cont...

CHP1/750	Light weight single earpiece headset with in-line PTT & VOX*
CHP750HS	Single earpiece ear defender headset with boom mic and in line PTT for hard hat & VOX*
CHP750HD	Double earpiece defender headset with boom mic and in line PTT for hard hat & VOX*
CHP750D	Double earpiece headband defender headset with boom mic and in line PTT & VOX*
CHP750BT	Bluetooth double earpiece headband defender headset with boom mic and ear cup PTT
CBH750	Spare spring loaded belt clip

*VOX = Voice Operated Transmit (hands free operation)

For complete up to date list of optional accessories visit www.entel.co.uk

Preparing Your Radio For Use

Simplex/ Duplex Channel Use

Your transceiver has been factory programmed in accordance with International regulations.

The mode of operation cannot be altered from simplex to duplex or vice versa. Simplex or duplex mode is automatically activated, depending on the channel selected. If you have a licence to use a specific simplex or semi-duplex channel, contact your dealer who may be able to programme your channel using the transceiver's private channel memory.


Attaching / Removing the Battery Pack

- 1** To attach, locate the pegs on the bottom of the battery into the slots on the radio and press the top of the battery against the radio. Secure battery by tightening the screw clockwise by hand. (Do not over tighten)
- 2** To remove, unscrew the locking screw anticlockwise and pull the battery away from the top of the radio.



Attaching / Removing the Belt Clip

- 1** To attach, locate the clip into the slot on the back of the battery and slide up until you hear a "click".
- 2** To remove, pull the tab (a) towards the belt clip. Then slide the belt clip -down-wards (b).

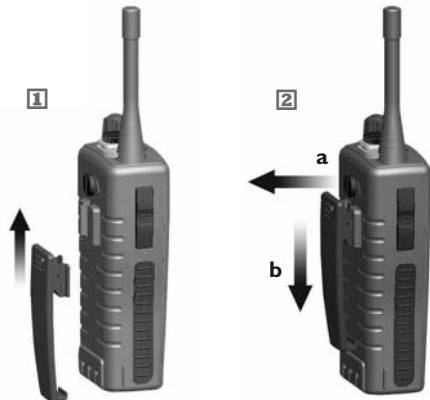

Preparing Your Radio For Use cont...

Common

Attaching / Removing the Aerial

- 1 To attach, carefully align the aerial with the socket. Screw in the aerial clockwise (taking care not to cross the thread) until it is seated firmly against the top of the radio.
- 2 To remove, unscrew the aerial anti-clockwise.



Attaching / Removing Audio Accessories

- 1 To attach, remove the accessory cover by unscrewing the locking screw anti-clockwise (leave cover attached or store in a safe place). Attach accessory plug by locating over the socket. Carefully tighten the locking screw clockwise until finger tight (do not tighten with a screwdriver etc).
- 2 To remove, unscrew the locking screw by hand in an anti-clockwise direction (carefully use a coin or screwdriver if too tight). Ensure you re-fit the accessory cover so as to protect the socket.

Charging Your Radio

Several charger options are available. Please refer to your charger user guide.



Using Your HT642/HT648

On / Off button

Press the on / off button to turn your radio on. A short turn on beep will be heard. To turn off, press and hold the on / off button until the display extinguishes.

Using your radio

Before using your radio you may need to adjust the volume on the radio to take in to account background noise. Adjust the volume using the rotary control on the top of the radio.

Transmitting on your radio

Before transmitting, ensure that the channel is not in use. To transmit press and hold the PTT button and speak approximately 35 - 50mm from the microphone on the radio. To receive, release the PTT button.

Channel Scan (dealer programmable feature)

Press the dealer assigned button on the radio to start scan. Press again to return to stop.

Monitor Button

Press the orange monitor button on the top of the radio to defeat the squelch mute. Press again to return to squelch mute.

Securing Your Radio

You may secure your radio to you using either the supplied CBH750 belt clip or using an optional leather case.

Using Your HT644/HT649

Common

On / Off button

Press the on / off button to turn your radio on. A short turn on beep will be heard. To turn off, press and hold the on / off button until the display extinguishes.

Using your radio

Before using your radio you may need to adjust the volume on the radio to take in to account background noise. Adjust the volume using the rotary control on the top of the radio.

Transmitting on your radio

Before transmitting, ensure that the channel is not in use. To transmit press and hold the PTT button and speak approximately 35 - 50mm from the microphone on the radio. To receive, release the PTT button.

Scan (HT644/HT649)

1. Select the desired channel to be scanned using the & buttons.
2. Press the [MEM] button to store the channel into the transceiver's memory. [MEM] is displayed on the LCD. This channel is now memorised to be scanned.
3. To add further channels, repeat steps 1 & 2.
4. To delete a channel from the transceiver's scan memory, simply press [MEM] button again whilst the memorised channel is displayed. [MEM] disappears.
5. All channels programmed remain in the transceivers scan memory even if the power is switched off.
6. Adjust the squelch control until the white noise is eliminated.
7. To start scanning, press the [SCAN] key. The scan proceeds from the lowest to the highest programmed channel number and stops on channels when a transmission is received.
8. To stop the scan at any time, press the [SCAN] key.

Emergency Channel

Channel 16 is used for emergency contact with other vessels. Hold down the [16] key for 1 second to select channel 16.

Monitor Button

Press the monitor button on the front of the radio to defeat the squelch mute. Press again to return to squelch mute.

Securing Your Radio

You may secure your radio to you using either the supplied CBH750 belt clip or using an optional leather case.

HT642

Standard Features:


- Environmentally protected to IP68 i.e. submersible to 5 metres for up to 60 minutes
- Robust design, exceeds MIL-STD-810C/D/E/F
- 1800mAH Lithium-Ion battery for superior operational time
- 16 programmable channels
- Full transmit power output 5 Watts
- Exceptionally loud and clear audio
- Top mounted monitor button
- Automatic power save to further increase operational time
- Low battery alert indicates when the battery needs replacing

Dealer programmable features:

- Channel Scan
- Key lock button
- Prefixed minimum volume level and fixed bleep level



Controls & Indicators

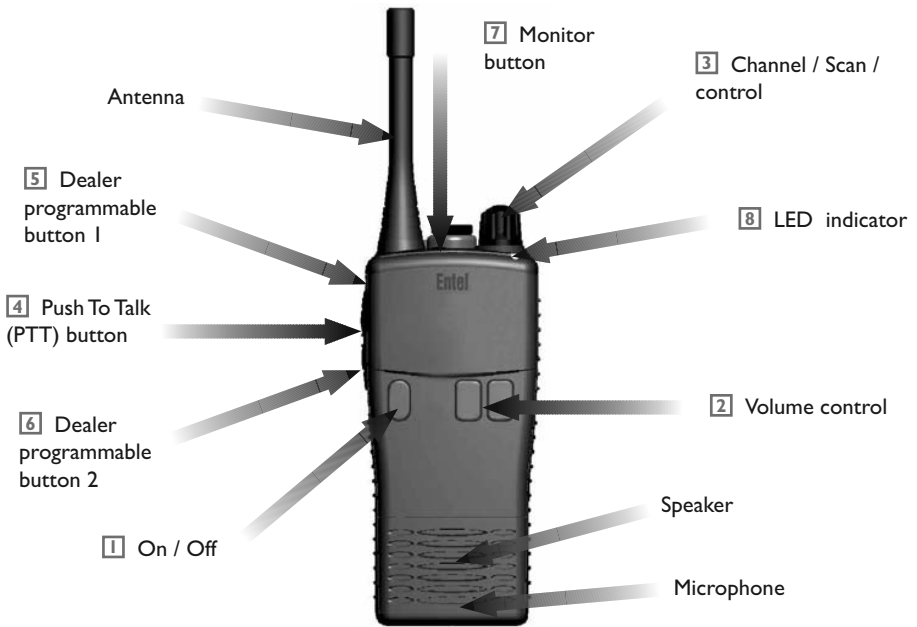

- 1** On / Off button. Press to turn radio on, press and hold to turn off.
- 2** Press up / down buttons to increase / reduce volume.
- 3** Channel / Scan Control. Rotate to select the desired channel or scan setting.
- 4** Push To Talk (PTT) button. Press to speak and release to listen.
- 5** Dealer programmable button 1 (ask your dealer for more information).
- 6** Dealer programmable button 2 (ask your dealer for more information).
- 7** Monitor button. Press button to turn on / off.
- 8** LED indicator:
 - RED Steady = Transmitting
 - RED flashing slowly = Battery needs re-charging
 - GREEN Steady = Receiving
 - GREEN flashing slowly = Selcall received
 - YELLOW Steady = Non valid signal detected
 - YELLOW flashing rapidly = Scanning

HT644

Standard Features:


- Environmentally protected to IP68 i.e. submersible to 5 metres for up to 60 minutes
- Robust design, exceeds MIL-STD-810C/D/E/F
- LCD screen to display channel number
- 1800mAH Lithium-Ion battery for superior operational time
- INT, USA, CAN channels
- Full transmit power output 5 Watts
- Exceptionally loud and clear audio
- Ch 16 shortcut button
- Scan button
- Monitor button
- MEM button
- Automatic power save to further increase operational time
- Low battery alert indicates when the battery needs replacing

Dealer programmable features:

- Key lock button
- Prefixed minimum volume level and fixed bleep level



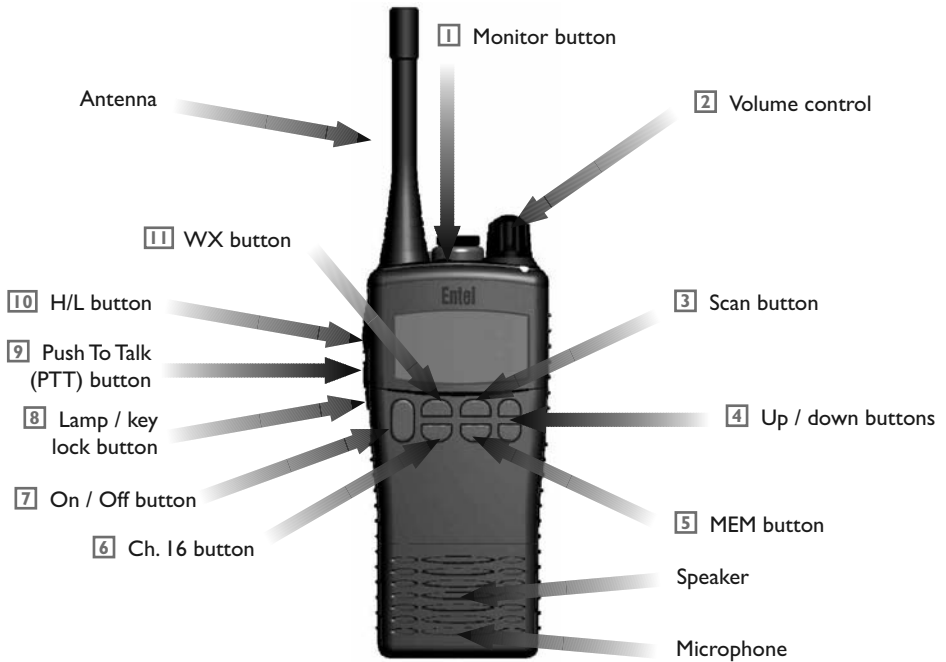

Controls & Indicators



- 1 Monitor button. Press to monitor channel.
- 2 Volume control
- 3 Channel scan button. Press to start / stop channel scanning.
- 4 Up / down buttons. Press up / down buttons to change channel.
- 5 MEM button. Memorise a desired channel for scanning.
- 6 Ch. 16 button. Shortcut button to access channel 16.
- 7 On / Off button. Press to turn radio on, press and hold to turn off.
- 8 Lamp/key lock button. Momentarily pressing this button illuminates the LCD display. Holding this button for over 1 second activates the key lock. To deactivate press button again.
- 9 PTT button. Press & hold to speak. Release to listen.
- 10 H/L button. Press and hold this button for one second to toggle between high and low power (1 & 5 Watts).
- 11 WX button. Immediately recalls the weather channels.

LCD Indicators

• High power selected (5 Watts)	<i>H</i>
• Low power (1 Watt)	<i>L</i>
• Transmit in progress	TX
• Receive in progress	RX
• Indicated channel is memorised for scanning	<i>MEM</i>
• Scrambler mode enabled (version A & B only)	<i>SCM</i>
• Voice operated mode enabled	<i>VOX</i>
• Indicates the channel set for USA	<i>USA</i>
• Indicates the channel set for Canadian	<i>CAN</i>
• Indicates the channel set for International	<i>INTL</i>
• NOAA weather channels (USA and Canadian waters only)	<i>WX</i>
• A ship-to-ship channel (in USA or Canadian mode)	<i>A</i>
• Battery life indicator	
• Indicates keypad is locked, excluding the PTT, H/L and LAMP buttons	
• Private channel number selected	<i>P</i>
• Duplex channel selected (not simplex)	<i>DUP</i>

PAGE
INTENTIONALLY
LEFT BLANK

HT648

Standard Features:

- Environmentally protected to IP68 i.e. submersible to 5 metres for up to 60 minutes
- Robust design, exceeds MIL-STD-810C/D/E/F
- GMDSS (Conforms to Pan European Specification ETS300-225 for the use of radios for Safety at sea)
- Non rechargeable Lithium-Ion battery for superior operational time
- 16 programmable channels
- Transmit power output 2 Watts
- Exceptionally loud and clear audio
- Top mounted monitor button
- Automatic power save to further increase operational time
- Low battery alert indicates when the battery needs replacing




Dealer programmable features:

- Channel Scan
- Key lock button
- Prefixed minimum volume level and fixed bleep level



Controls & Indicators

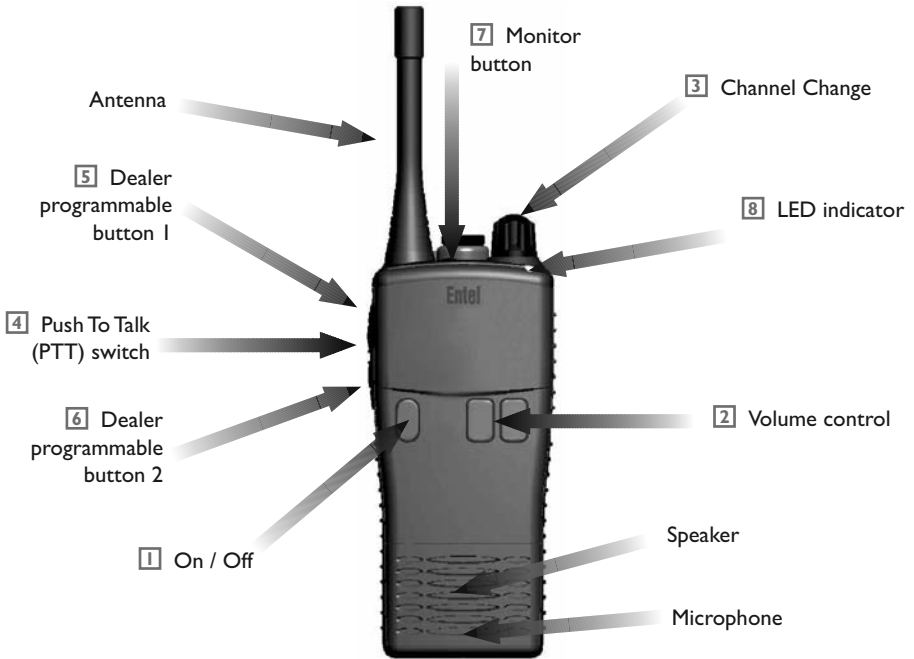

- 1 On / Off button. Press to turn radio on, press and hold to turn off.
- 2 Press up / down buttons to increase / reduce volume.
- 3 Channel change control, rotate to select the desired channel or scan setting.
- 4 Push to talk button, press to speak and release to listen.
- 5 Dealer programmable button 1 (ask your dealer for more information).
- 6 Dealer programmable button 2 (ask your dealer for more information).
- 7 Monitor button. Press to turn monitor on / off.
- 8 LED indicator.
 - RED Steady = Transmitting
 - RED flashing slowly = Battery needs re-charging
 - GREEN Steady = Receiving
 - GREEN flashing slowly = Non valid signal detected
 - GREEN flashing rapidly = Scanning

HT649

Standard Features:

- Environmentally protected to IP68 i.e. submersible to 5 metres for up to 60 minutes
- Robust design, exceeds MIL-STD-810C/D/E/F
- GMDSS (Conforms to Pan European Specification ETS300-225 for the use of radios for Safety at sea
- LCD screen to display channel number
- Non rechargeable Lithium-Ion battery for superior operational time
- 255 channel capacity
- Transmit power output 2 Watts
- Exceptionally loud and clear audio
- Ch 16 shortcut button
- Scan button
- Monitor button
- MEM button
- Automatic power save to further increase operational time
- Low battery alert indicates when the battery needs replacing



Dealer programmable features:

- Key lock button
- Prefixed minimum volume level and fixed bleep level



Controls & Indicators



1 On / Off button. Press to turn radio on, press and hold to turn off.

2 Monitor button. Press to monitor channel

3 Channel scan button. Press to start/stop channel scanning.

4 Channel change buttons. Press up/down buttons to change channel.

5 Mem button.

6 Ch 16 button. Shortcut button to access channel 16.

7 PTT button. Press & hold to speak. Release to listen.

8 LED indicator.

- RED Steady = Transmitting
- RED flashing slowly = Battery needs re-charging
- GREEN Steady = Receiving
- GREEN flashing slowly = Non valid signal detected
- GREEN flashing rapidly = Scanning

* Dealer programmable buttons (ask your dealer for more information).

LCD Indicators

- Key Bleeps Off



- Keypad Locked



- Blue-Com device connected



- Accessory Connected



- GPS Connected



- VOX Enabled



- Battery State



- Receive strength / TX Output



RX / M

- Speaker muted



- Speaker unmuted




- Channel scanning



NOTES

A large, empty rectangular box with a thin black border, occupying most of the page. It is intended for the user to write their notes.

NOTES

A large, empty rectangular box with a thin black border, occupying most of the page. It is intended for the user to write their notes.

'the
professional's
choice'

<Intended Country Of Use>

- | | | | |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| <input type="checkbox"/> BE | <input type="checkbox"/> EL | <input type="checkbox"/> LU | <input type="checkbox"/> RO |
| <input type="checkbox"/> BG | <input type="checkbox"/> ES | <input type="checkbox"/> HU | <input type="checkbox"/> SI |
| <input type="checkbox"/> CZ | <input type="checkbox"/> FR | <input type="checkbox"/> MT | <input type="checkbox"/> SK |
| <input type="checkbox"/> DK | <input type="checkbox"/> IT | <input type="checkbox"/> NL | <input type="checkbox"/> FI |
| <input type="checkbox"/> DE | <input type="checkbox"/> CY | <input type="checkbox"/> AT | <input type="checkbox"/> SE |
| <input type="checkbox"/> EE | <input type="checkbox"/> LV | <input type="checkbox"/> PL | <input type="checkbox"/> UK |
| <input type="checkbox"/> IE | <input type="checkbox"/> LT | <input type="checkbox"/> PT | |

Copyright Entel UK Ltd. 2008

CE 0891 !

Registered Community Design Application 000810890

U.S. Design Patent Pending No. 29/183,829

Copyright and Unregistered Design Right Entel UK 2008

All rights reserved

Headquarters: United Kingdom www.entel.co.uk