

Extract from our online catalogue:

Ics-35/IU/QP

Current to: 2025-10-02



Ultrasonic sensors in the lcs series in cuboidal housing with lateral sound exit are available in three device variants with three different detection ranges.

HIGHLIGHTS

- › Up to 3 pnp switching outputs
- › Automatic synchronisation › for simultaneous operation of up to ten sensors in close quarters

BASICS

- › 2 or 3 switching outputs in pnp variant
- › Analogue output 4–20 mA and 0–10 V › with automatic switching between current and voltage outputs
- › 3 detection ranges with a measurement range of 30 mm to 2 m
- › microsonic Teach-in on pin 5
- › 0.18 mm resolution
- › Temperature compensation
- › 9–30 V operating voltage
- › LinkControl › for configuration of sensors from a PC

Description

The lcs sensors

have a block-like plastic housing with four fixation bores, two of which are already equipped with M4 threaded bushings for eased mounting.


Two or three LEDs

indicate all operating statuses.

Three detection ranges and two output stages are available for selection:



2 pnp switched outputs



3 pnp switched outputs



1 analogue output 4–20 mA and 0–10 V

Via pin 5 at the M12 circular connector,


(Com input), the lcs sensors are set (Teach-in): Switched output D1 is set by connecting pin 5 to $+U_B$, while switched output D2 is set by connecting pin 5 to $-U_B$. Also the sensors with analogue output are set via pin 5.

The lcs sensors with switched output offer three operating modes:

- › Single switching point
- › Two-way reflective barrier
- › Window mode

Teach-in of a single switching point

- › Place object to be detected (1) at the desired distance
- › Apply $+U_B$ to pin 5 for about 3 seconds
- › Then apply $+U_B$ to pin 5 again for about 1 seconds

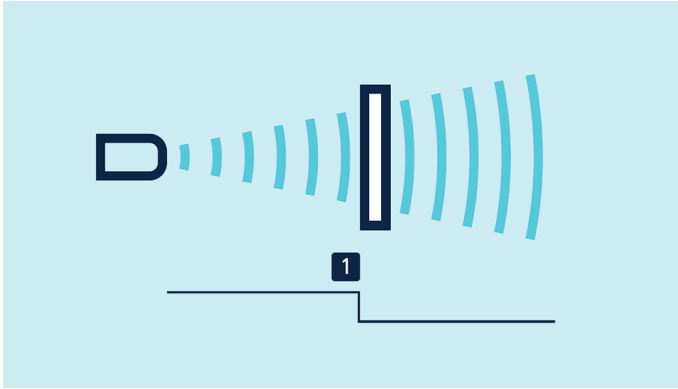


Teach-in of a switching point

Teach-in of a two-way reflective barrier

with a fixed reflector


- › Apply $+U_B$ to pin 5 for about 3 seconds
- › Then apply $+U_B$ to pin 5 again for about 10 seconds

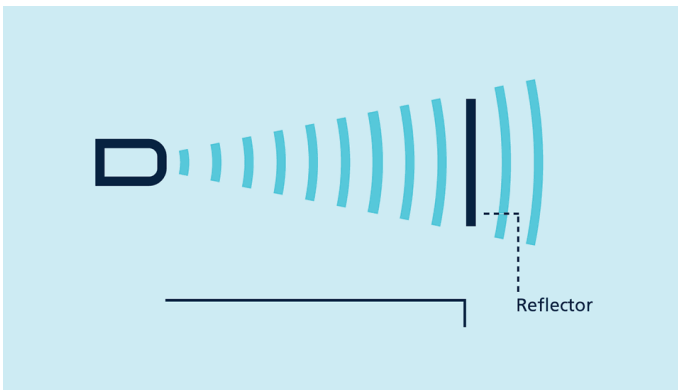

Teach-in of a two-way reflective barrier

For configuration of a window

- › Place object at the near edge of the window (1)
- › Apply $+U_B$ to pin 5 for about 3 seconds
- › Then move the object to the far edge of the window (2)
- › Then apply $+U_B$ to pin 5 again for about 1 seconds

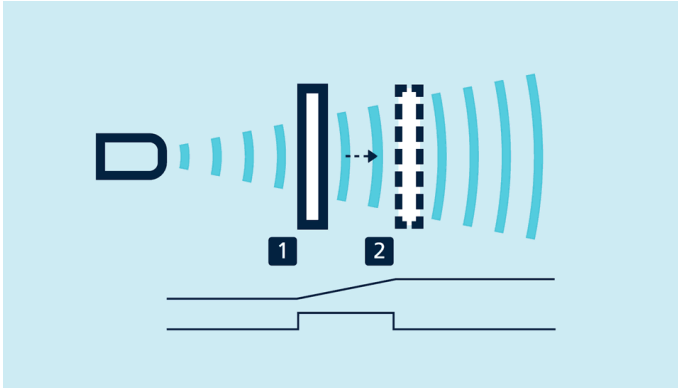

Teach-in of an analogue characteristic or a window with two switching points

NCC/NOG

and rising/falling analogue characteristic curve can also be set via pin 5.

The analogue sensor

checks the load connected to the output and then automatically switch to 4–20 mA current output or 0–10 V voltage output to ensure maximum ease of handling.

The Ics-25/DDD is equipped with three pnp switched outputs


which are set with the help of the **Link-Control adapter** LCA-2. In addition to this “offline” programming, all Ics sensors can also be parameterised on the PC with the LCA-2 and the **Link-Control software** .



Sensor connected to the PC via LCA-2 for programming

Synchronisation


permits the simultaneous use of multiple mic sensors in an application. To avoid mutual interference, the sensors can be synchronised with one another. To do this, all the sensors are electrically connected on pin 5.

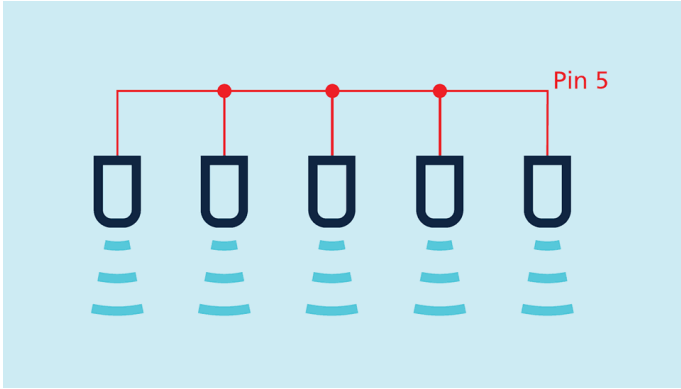


Synchronisation using pin 5

Ics-35/IU/QP

scale drawing



detection zone

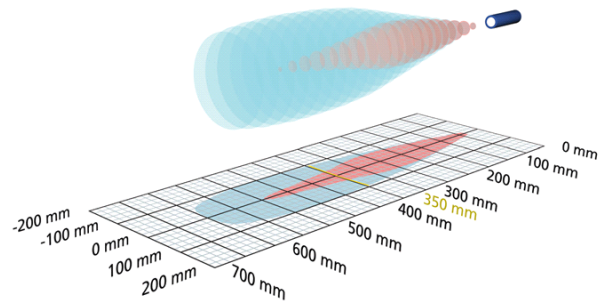

1 x analogue 4-20 mA + 0-10 V



600 mm

| | |
|-----------------|------------------------------------|
| measuring range | 65 - 600 mm |
| design | cuboidal |
| operating mode | analogue distance measurements |
| particularities | flat housing lateral sound exit |

ultrasonic-specific

| | |
|----------------------|--|
| means of measurement | echo propagation time measurement |
| transducer frequency | 400 kHz |
| blind zone | 65 mm |
| operating range | 350 mm |
| maximum range | 600 mm |
| resolution | 0.18 mm |
| reproducibility | ± 0.15 % |
| accuracy | ± 1 % (temperature drift internally compensated) |

electrical data

| | |
|-----------------------------|--|
| operating voltage U_b | 9 - 30 V d.c., reverse polarity protection |
| voltage ripple | ± 10 % |
| no-load current consumption | ≤ 70 mA |
| type of connection | 5-pin M12 initiator plug |

Ics-35/IU/QP

outputs

| | |
|-----------------------------|--|
| output 1 | analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling |
| response time | 70 ms |
| delay prior to availability | < 300 ms |

inputs

| | |
|---------|-----------------------------|
| input 1 | com input teach-in input |
|---------|-----------------------------|

housing


| | |
|---------------------------------|--|
| material | PBT |
| ultrasonic transducer | polyurethane foam, epoxy resin with glass contents |
| class of protection to EN 60529 | IP 65 |
| operating temperature | -20°C to +70°C |
| storage temperature | -40°C to +85°C |
| weight | 200 g |

technical features/characteristics

| | |
|--------------------------|---|
| temperature compensation | yes |
| controls | com input control input |
| scope for settings | Teach-in via com input on pin 5 LCA-2 with LinkControl |
| Synchronisation | yes |
| multiplex | no |
| indicators | 2 x three-colour LED |
| particularities | flat housing lateral sound exit |

Ics-35/IU/QP

pin assignment

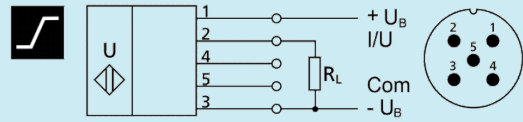

order no.

Ics-35/IU/QP

The content of this document is subject to technical changes.
Specifications in this document are presented in a descriptive way
only. They do not warrant any product features.