


Analog Discovery Pro 2440 and 2450 Datasheet

High-Speed, High-Bandwidth Mixed Signal Oscilloscopes

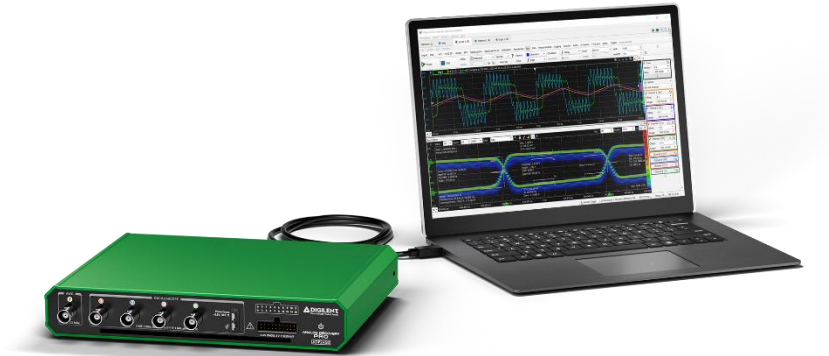

Highlighted Features

- USB 3.2 based Mixed Signal Oscilloscopes
- Four analog inputs at either
 - ADP2440: 12-bit, 600 MS/s, 100+ MHz bandwidth
 - ADP2450: 8-bit, 1 GS/s, 200+ MHz bandwidth
- Dual Mode for seamless multi device integration
- 14-bit Arbitrary Waveform Generator with 15 MHz bandwidth
- 512 MB of deep buffer memory for low latency repeated triggers to be freely allocated between analog and digital systems
- 16 digital inputs/outputs for the Logic Analyzer, Pattern Generator, and Protocol Generator
- Extensive and powerful software support with WaveForms and WaveForms SDK
- Expansive analysis support including Bode plot, dedicated FFT, impedance analyzer, bus analyzer, data logger, and more

Overview

Smart. Capable. Balanced.

The Analog Discovery Pro 2440 and Analog Discovery Pro 2450 deliver serious measurements for the engineer who knows what matters. Choose between four analog channels of either 100 MHz bandwidth at 12-bit resolution (ADP2440) or 200 MHz bandwidth at 8-bit resolution (ADP2450) with both featuring a 16 channel Logic Analyzer and Pattern Generator, an arbitrary waveform generator, and seamless integration with the WaveForms software. These USB 3.2 oscilloscopes provide the right level of performance where you need it. Circuit design, embedded systems, or your own unique test workflow; you can do it all without distracting from your task at hand.

When you need a real tool to solve real problems, use the Analog Discovery Pro.

1 Features

Analog Inputs

- Analog Discovery Pro 2440
 - Four BNC input channels with 12-bit resolution with up to ± 25 V input range
 - 100+ MHz bandwidth, 600 MS/s interleaved
- Analog Discovery Pro 2450
 - Four BNC input channels with 8-bit resolution with up to ± 25 V input range
 - 200+ MHz bandwidth, 1 GS/s interleaved
- 10 different hardware input ranges from ± 25 mV to ± 25 V for multiple levels of precision
- User selectable 50 Ω or 1 M Ω input impedance
- Many additional views including FFT, Histogram, Persistence, Eye Diagram, and Analog-to-Digital plots
- Complex trigger support including Edge, Pulse, Timeout, Glitch, Transition, and Window conditions
- Dedicated Spectrum Analyzer, Network/Bode Plot Analyzer, and Impedance Analyzer instruments

Analog Output

- One BNC output function generator channel with 14-bit resolution, ± 5 V output range
 - 15+ MHz bandwidth, up to 125 MS/s
- Standard, Advanced, and Custom Waveforms supported
 - Sine, Square, Triangle, Ramp, DC, Pulse, Noise, Burst
 - Uni and Bidirectional Frequency and/or Amplitude Sweep
 - Multiple modulation techniques including AM, FM, PM, and Summation

Digital I/O

- 16 digital I/O for the Logic Analyzer and Pattern Generator with fully configurable tri-state buffers
- Internally clocked up to a 1.2 GS/s sampling rate
- Many protocol analyzers including SPI, I2C, UART, 1-Wire, CAN, GPIB, I2S, LIN, JTAG, Manchester, SAE JA1850, and Quadrature Decoders
- Protocol generation support for SPI, UART, I2C, CAN, HDMI CEC, SWD, and AVR
- Two bidirectional BNC triggers for external and internal triggering

Additional Features

- Dual Mode to operate two devices simultaneously for 8 analog inputs, 32 digital I/Os, and 2 AWGs
- Automatic device phase adjustment between devices in Dual Mode
- USB 3.2 (5 Gbps) transfer speeds
- Triggering system allows Scope, AWG, and Digital I/O subsystems to trigger off of each other or external trigger inputs and forward triggers to other instruments
- Complex and custom math for each instrument to support the filtering and generation of any signal
- Deep Buffer Memory that can be freely allocated between Analog and Digital systems
- Memory Segmentation with only 1 μ s trigger re-arm latency between high-speed repeated captures
- Metal enclosure with DIN rail support for easy mounting

Software Support

- Digilent's free and powerful WaveForms software for Mac, Windows, and Linux
- WaveForms SDK for custom applications and scripting through C/C++, Python, C#, Visual Basic

Comparison Chart

What do you need?		ADP2440	ADP2450
High Sample Rate and Bandwidth?	12-bit, 100 MHz, 600 MS/s across 4 channels?	●	
	8-bit, 200 MHz, 1 GS/s across 4 channels?		●
16 freely configurable Digital I/O generating and interpreting data?		●	●
Bode plots, FFTs, Eye Diagrams, Impedance Analyzer, custom math?		●	●
Arbitrary Waveform Generator supporting everything from sine and square waves to phase and amplitude modulation in burst pulses?		●	●
To have everything from Scope Probes and functionality to software and product support included in a single one-time price?		●	●

Callout Diagram

1. Arbitrary Waveform Generator

- 1 channel on a BNC connector
- 14 bits, ±5 V output range
- 125 MS/s, 15+ MHz bandwidth

2. Oscilloscope (2440 / 2450)

- 4 inputs on BNC connectors
- 12 / 8 bits, 10 hardware input ranges
- 100+ / 200+ MHz bandwidth for all ranges
- 600 MS/s / 1 GS/s aggregate sample rate
- 1 MΩ / 50 Ω selectable input impedance

3. Probe Compensation Tabs

- Easy passive probe compensation

4. Digital I/O

- 16 configurable inputs/outputs
- Pattern Generator and Logic Analyzer
- Protocol Analysis and Generation

5. Power Supply Input

- External 5 V, 4 Amp supply included

6. USB Connector

- USB 3.2 (5Gbps), Type C cable included

7. Earth Ground Screw

- To facilitate earth ground connections

8. BNC Triggers


- Input or output
- Used to facilitate Dual Mode

9. Ventilation Holes

- To enable airflow for the on-board fan

Additional Features

- Spectrum Analyzer
- Network Analyzer
- Impedance Analyzer
- Data Logger
- Deep Buffer memory
- USB 3.2 speeds (5Gbps)
- Rapid Triggering

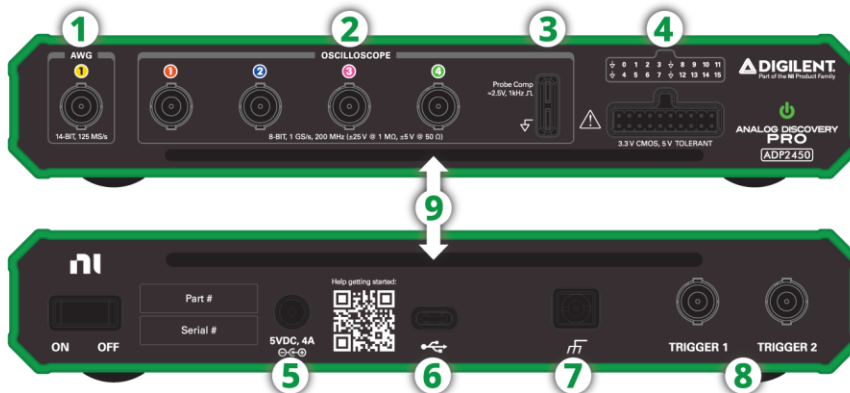

2 WaveForms Software

Diligent's WaveForms software offers a unified device experience across all our Test and Measurement devices, enabling use of all hardware features and instruments. It features a friendly user interface that has the feel of traditional benchtop devices. WaveForms makes it easy to acquire, visualize, analyze, produce, and reuse both analog and digital signals simultaneously on Windows, MacOS, and Linux.


For even more customization potential, the WaveForms Software Development Kit (SDK) can be used to create custom applications and scripts to control the T&M device in Python, C, and additional languages.

The WaveForms software supports the following instruments for Analog Discovery Pro 2440 and Analog Discovery Pro 2450 devices:

2.1 Oscilloscope


The Oscilloscope instrument captures analog input data via the analog input scope channels. When this instrument is used, the Analog Discovery Pro 2440 acts as a 12-bit 100+ MHz bandwidth oscilloscope with up to 600 MS/s across all four channels. The ADP2450 acts as an 8-bit 200+ MHz bandwidth oscilloscope with up to 1 GS/s across all four channels.

Each device has 10 different hardware input ranges, deep buffer memory, and complex triggering to enable precise data collection for every engineer.

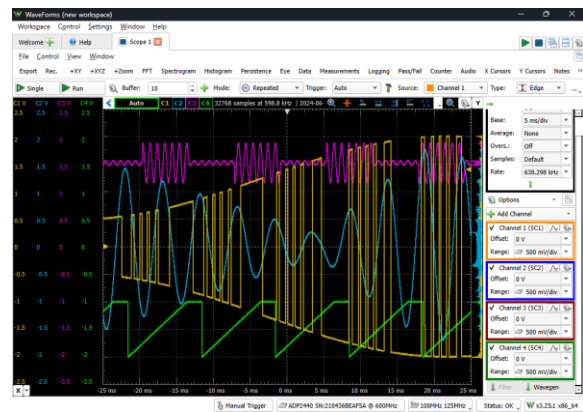


2.2 Waveform Generator

The Waveform Generator instrument can output a wide variety of analog waveforms. Supported waveform shapes include everything from simple waveforms like Sine and Triangle waves to amplitude and frequency sweeps to sending out bursts of carrier signals with phase modulation and amplitude summation. Each of the Analog Discovery Pro devices have an arbitrary waveform generator with ± 5 V output and 15 MHz of bandwidth.

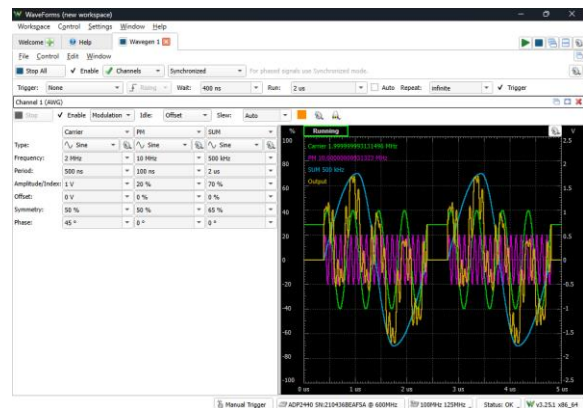


2.3 Voltmeter

The Voltmeter instrument offers a relaxed view of the Oscilloscope, taking averages on each of the four analog inputs over a user acquisition rate. The historic high and low measurements are tracked and maintained throughout the acquisition.

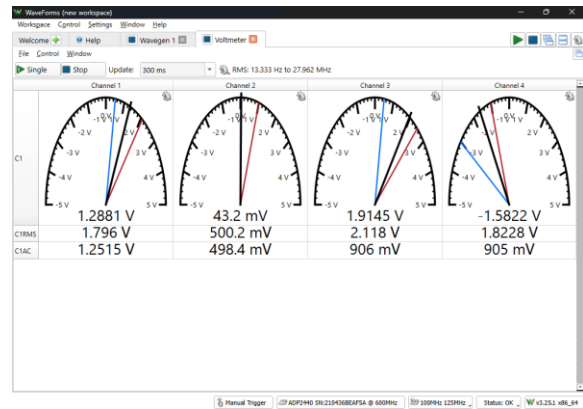

2.4 Data Logger


The Data Logger instrument can capture and display large buffers of analog input data on the Scope pins. The Data Logger can capture up to 10 million samples at user defined and hardware timed update rates ranging from every 5 μ s to once an hour.

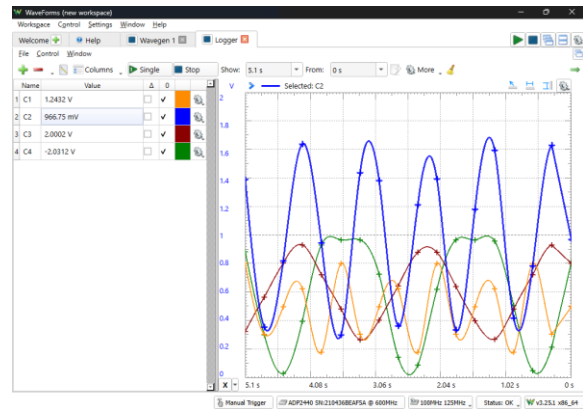

Larger and faster data logging can be performed through Record mode on the Oscilloscope.

2.5 Logic Analyzer

With the Logic Analyzer, the 16 digital input/output channels can be freely grouped as buses and protocols. Protocol groups can be used to view the decoded contents of packets of many communications protocols, including SPI, I2C, UART, CAN, I2S, LIN, SAE J1850, SWD, and more.

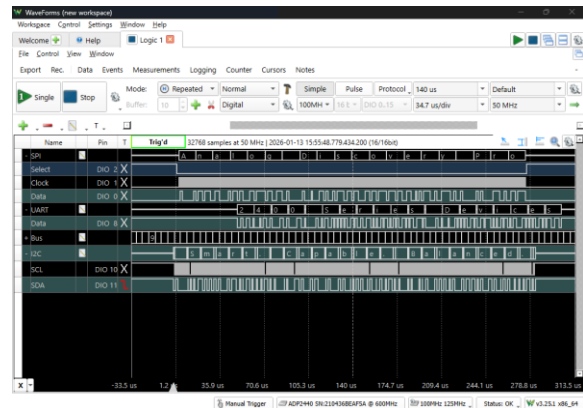


A wide variety of trigger conditions are supported from edge, glitch, timeouts, exact pulse length with hysteresis, edge counts, and user specified protocol frames.

The Analog Discovery Pro 2440 and Analog Discovery Pro 2450 allow for fine system frequency adjustment of the digital system between 75 MHz and 150 MHz, with scaled internal sample rates up to 1.2 GHz.

2.6 Pattern Generator


Analog Discovery Pro 2000 Series devices can assign each of the digital pins as individual output or as a group of outputs. Different patterns, from simple clocks and noise to burst signals and binary counters to custom truth tables and user defined patterns can be generated.

Each output can be set as push-pull, open source, open drain, or tri-state output. Communication protocol patterns can be generated using the Protocol instrument.

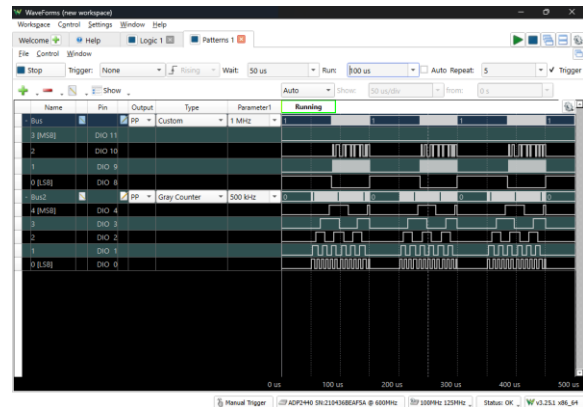

2.7 Static I/O

The Static I/O instrument can emulate a variety of user input/output devices on the 16 digital input/output pins. Virtual LEDs, buttons, switches, sliders, and displays can be assigned to specific digital I/O pins and interacted with within the WaveForms user interface.

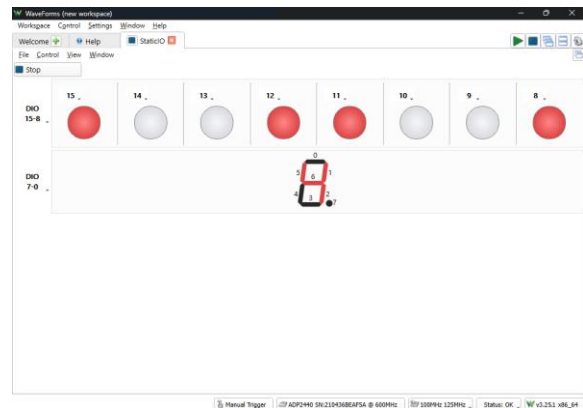


2.8 Spectrum Analyzer

The Spectrum Analyzer instrument is used to view the power of frequency-domain components of analog signals captured on the analog input channels through either an FFT or CZT algorithm. Each captured trace can have different windowing functions applied for nuanced spectral analysis. Cursors and automatic measurements include noise floor, SFDR, SNR, THD and more.



2.9 Network Analyzer

The Network Analyzer instrument can be used to view the amplitude and phase response of a circuit under test. Bode, Nichols, and Nyquist plots can also be viewed with this instrument. The Network Analyzer instrument uses the analog output and analog input channels of the Analog Discovery Pro 2000 Series device to probe a test circuit, by generating a frequency sweep of known amplitude and measuring the circuit response. The Network Analyzer can be configured to use an external signal to provide input to the circuit under test, rather than using the analog output channel.

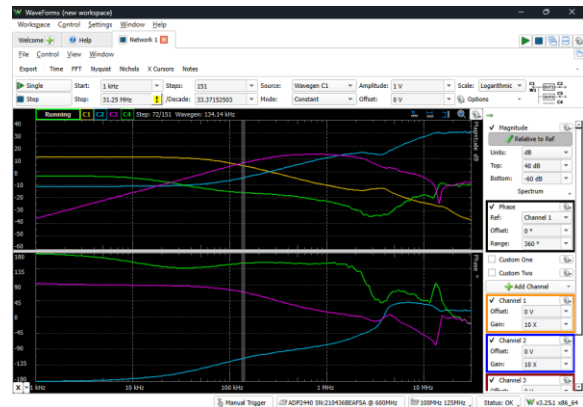

2.10 Impedance Analyzer


The Impedance Analyzer instrument is used to view a wide variety of frequency response characteristics of an unknown circuit under test. Input, Phase, Voltage, Current, Impedance, Admittance, Inductance, Factor, and Nyquist plots are all available. In addition, Custom plots can be used to present the results of a wide variety of different mathematical operations on buffered data.



2.11 Protocol Analyzer


The Protocol Analyzer instrument generates a variety of common communication protocols including UART, SPI, I2C, CAN, HDMI CEC, SWD, and AVR.

Protocol data can also be simultaneously and automatically interpreted for the above protocols in addition to JTAG and Quadrature Decoder. Protocol data can be alternatively analyzed through the Logic Analyzer. Custom scripts can also be written within the Protocol Analyzer instrument to generate transaction sequences.

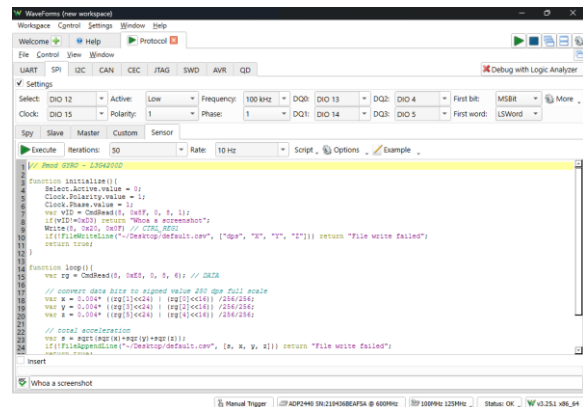


2.12 WaveForms Script Editor

Each of WaveForms' instruments can be controlled through scripts within the WaveForms application itself. WaveForms' "Script" instrument allows the user to write and run JavaScript code that can control the rest of the application through an extensive API. This allows the user to configure and run many instruments at the same time, in an easily repeatable way.

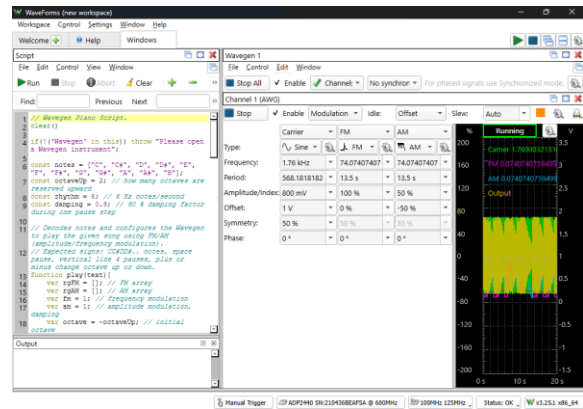


3 Extended Software Support

Users can further customize their experience with the Analog Discovery Pro 2440 and Analog Discovery Pro 2450 devices with the LabVIEW WaveForms Toolkit – a powerful add-on to the LabVIEW software combining the data acquisition capabilities of the Analog Discovery Pro with LabVIEW's extensive analysis functionality in an intuitive way.

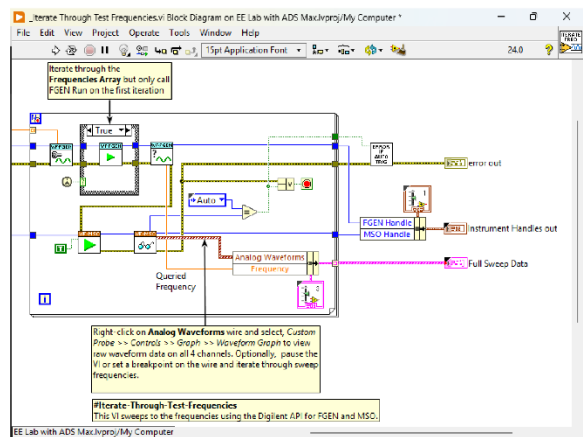

By leveraging the extensive API available in Digilent's WaveForms SDK, users can create their own applications to programmatically control and communicate with Analog Discovery Pro 2000 Series devices in many other platforms such as a Raspberry Pi or your favorite data processing environment.

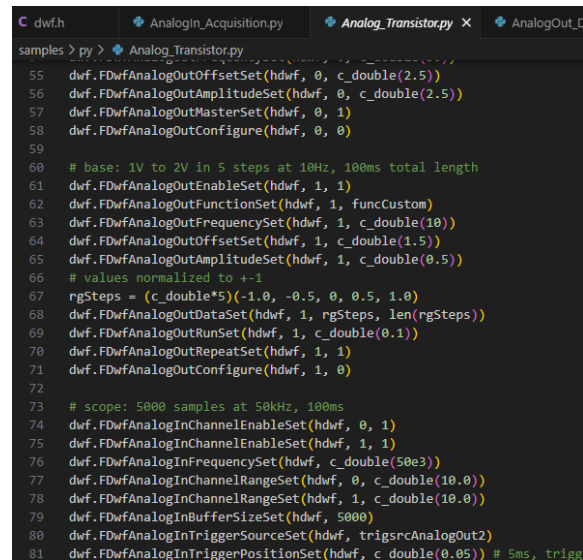

4 Analog Discovery Pro 2000 Series Specifications

These specifications are typical unless otherwise stated and are valid following 30 minutes of warm-up at 25 °C unless otherwise noted. Warranted specifications are valid at $T_{cal} \pm 5$ °C. Temperature coefficients are calculated using the temperature change from the last external calibration.

Specifications not assigned to an individual device are valid for both the ADP2440 and ADP2450 devices.

4.1 Mixed Signal Oscilloscope

Analog Input Channels

Supports the Oscilloscope, Voltmeter, Data Logger, Spectrum Analyzer, Network Analyzer, Impedance Analyzer, Curve Tracer, and Script Editor instruments.

Vertical

	ADP2440	ADP2450
Number of Channels	Four	
Input Type	Referenced single-ended	
Connector Type	Front Panel BNC ¹	
Hardware Input Ranges	± 25 mV, ± 50 mV, ± 100 mV, ± 250 mV, ± 500 mV, ± 1 V, ± 2.5 V, ± 5 V, ± 10 V ² , ± 25 V ²	
Resolution	12 bits	8 bits
DC Accuracy (warranted)	± 2 mV $\pm 0.5\%$ of range (scale ≤ 0.05 V/div, $V_{inCM} = 0$ V) ± 10 mV $\pm 0.5\%$ of range (0.05 V/div $<$ scale ≤ 0.5 V/div, $V_{inCM} = 0$ V) ± 100 mV $\pm 0.5\%$ of range (scale > 0.5 V/div, $V_{inCM} = 0$ V) ²	
Bandwidth (-3 dB)³	100+ MHz	200+ MHz
Input Impedance (selectable per channel)	50 Ω $\pm 1\%$, typical 1 M Ω $\pm 1\%$, typical	
Input Capacitance (1 MΩ)	20 pF, typical	
Input Coupling	DC or AC, user selectable	
AC Coupling Cutoff (-3 dB)	16 Hz at 1 M Ω input impedance	
Overtoltage protection	± 6.5 V (DC + AC peak) at 50 Ω input impedance ± 50 V (DC + AC peak) at 1 M Ω input impedance	

DC Offset Range

Hardware Input Ranges	Programmable DC Offset Range	DC Offset Range Accuracy
± 25 mV, ± 50 mV, ± 100 mV, ± 250 mV	± 250 mV	± 2 mV $\pm 0.5\%$ of range (scale ≤ 0.05 V/div, $V_{inCM} = 0$ V)
± 500 mV, ± 1 V, ± 2.5 V	± 2.5 V	± 10 mV $\pm 0.5\%$ of range (0.05 V/div $<$ scale ≤ 0.5 V/div, $V_{inCM} = 0$ V)
± 5 V, ± 10 V, ± 25 V	± 25 V	± 100 mV $\pm 0.5\%$ of range (scale > 0.5 V/div, $V_{inCM} = 0$ V) ²

¹ Maximum supported cable length is 3 meters.

² When using the 50 Ohm Input Impedance option on the analog input channels the maximum voltage input is ± 5 V.

³ When using a cable with the appropriate frequency response.

Horizontal

	ADP2440	ADP2450
Aggregate Sample Rate	600 MS/s	1 GS/s
Maximum Buffer Size ¹	Up to ~357.9 million samples	Up to ~536.8 million samples

Digital Input Channels

Supports the Logic Analyzer, Pattern Generator, Static IO, Protocol, and Script Editor instruments.

Vertical

Number of Channels	16
Connector	100 mil 2×10 MTE Header ²
Function Control	Individually programmable as Digital Inputs or Outputs
Input Voltage	0 V to 3.3 V CMOS (5 V tolerant)
Input Logic Level	Input Low Voltage, V_{IL} , Min 0 V, Max 0.8 V Input High Voltage, V_{IH} , Min 2.0 V, Max 5 V
Output Type	3.3 V CMOS
Output Logic Level	Output Low Voltage, V_{OL} , Min 0 V, Max 0.5 V Output High Voltage, V_{OH} , Min 2.4 V, Max 3.3 V
Slew Rate	Slow (default), Fast ³
Drive Strength	4 mA, 8 mA (default) ³
Configurable Pull Resistors	None (default), pull-up, pull-down, or keeper ⁴
Overvoltage Protection	Short-circuit to ground, ± 20 V

Horizontal

Maximum Sampling Rate ⁵	1.2 GS/s
Maximum Buffer Size ⁶	Up to ~268.4 million samples for all digital inputs

¹ The maximum buffer size varies depending on the deep buffer memory allocation, sample rate, and number of enabled channels. See the Reference Manual for additional details.

² Use only Diligent-recommended accessories designed for the Analog Discovery Pro 2440 and Analog Discovery Pro 2450's 2×10 MTE connector, such as the kitted 2x10 flywires.

³ Configurable within WaveForms. Selected setting shared with all DIOs and Trigger IOs.

⁴ Internal to the FPGA and configurable within WaveForms. Selected setting shared with all DIOs and Trigger IOs.

⁵ Sampling rate configurable within WaveForms. See the Reference Manual for additional information on sample rate and bandwidth.

⁶ The maximum buffer size varies depending on the deep buffer memory allocation, sample rate, and number of enabled channels. See the Reference Manual for additional details.

4.2 Digital Outputs

Supports the Patterns, Static I/O, Protocol, and Script Editor instruments. These pins are the same ones used in the Digital Inputs of the Mixed Signal Oscilloscope.

Vertical

Number of Channels	16
Connector	100 mil 2×10 MTE Header ¹
Function Control	Individually programmable as Digital Inputs or Outputs
Input Voltage	0 V to 3.3 V CMOS (5 V tolerant)
Input Logic Level	Input Low Voltage, V_{IL} , Min 0 V, Max 0.8 V Input High Voltage, V_{IH} , Min 2.0 V, Max 5 V
Output Type	3.3 V CMOS
Output Logic Level	Output Low Voltage, V_{OL} , Min 0 V, Max 0.5 V Output High Voltage, V_{OH} , Min 2.4 V, Max 3.3 V
Slew Rate	Slow (default), Fast ²
Drive Strength	4 mA, 8 mA (default) ²
Configurable Pull Resistors	None (default), pull-up, pull-down, or keeper ³
Overvoltage Protection	Short-circuit to ground, ±20 V

Horizontal

Typical Sampling Rate⁴	100 MS/s
Maximum Buffer Size	32768 samples

¹ Use only Diligent-recommended accessories designed for the Analog Discovery Pro 2440 and Analog Discovery Pro 2450's 2×10 MTE connector, such as the kitted 2x10 flywires.

² Configurable within WaveForms. Selected setting shared with all DIOs and Trigger IOs.

³ Internal to the FPGA and configurable within WaveForms. Selected setting shared with all DIOs and Trigger IOs.

⁴ Sampling rate configurable within WaveForms. See the Reference Manual for additional information.

4.3 Arbitrary Waveform Generator (Wavegen)

Supports the Waveform Generator, Network Analyzer, Impedance Analyzer, Tracer, and Script Editor instruments.

Vertical

Number of Channels	One
Output Type	Single-ended
Connector Type	Front Panel BNC ¹
Standard Functions	Sine, square, triangle, sawtooth, ramp up, ramp down, DC voltage, noise, trapezium, others
Advanced Waveforms	Sweep, modulation and summing (phase, AM, FM), math, play mode, custom
Output Voltage Range²	±5 V open-circuit or at high impedance load
Resolution	14 bits
DC Accuracy	±10 mV ±0.5% of ($ V_{out} \leq 1.25$ V) ±25 mV ±0.5% of ($ V_{out} > 1.25$ V)
Output Impedance	50 Ω
Bandwidth	>15 MHz
DC Current Drive	30 mA maximum
Slew Rate	300 V/μS, typical
Overvoltage Protection	Short-circuit protected to ±15 V

DC Offset Range

Output Range	Offset Range²
Low Range	±1.25 V
High Range	±5 V

Horizontal

Maximum Sample Rate	125 MS/s
Maximum Play Buffer Size³	250 million samples

4.4 Trigger System

Trigger Features

Trigger Sources	Analog channels, Digital channels, Arbitrary Waveform Generator start, Pattern Generator start, External trigger (TRIG1 or TRIG2), Manual
Trigger Modes	None, Auto, Normal, Manual (Forced Trigger), Single
Analog Trigger	Edge, pulse, timeout, transition, hysteresis
Digital Trigger	Edge, level, glitch, timeout, length, counter, value, protocol
Output Trigger Sources	Analog channels, Digital channels, Arbitrary Waveform Generator start, Pattern Generator start, External trigger (TRIG1 or TRIG2), Manual

¹ Maximum supported cable length is 3 meters.

² The combination of signal amplitude and DC offset cannot exceed the output range or DC current drive specifications.

³ The maximum buffer size varies depending on the deep buffer memory allocation, sample rate, and number of enabled channels. See the Reference Manual for additional details.

External Trigger Characteristics

Each trigger can be used as a trigger input or output for multiple instruments.

Number of Channels	Two
Trigger Type	Digital
Connector	Back Panel BNC ¹
Input Voltage	0 V to 3.3 V CMOS (5 V tolerant)
Input Logic Level	Input Low Voltage, V_{IL} , Min 0 V, Max 0.8 V Input High Voltage, V_{IH} , Min 2.0 V, Max 5 V
Output Type	3.3 V CMOS
Output Logic Level	Output Low Voltage, V_{OL} , Min 0 V, Max 0.5 V Output High Voltage, V_{OH} , Min 2.4 V, Max 3.3 V
Channel Pull Resistors	1 M Ω pull-down
Direction Control	Programmable as input or output

4.5 Connectivity

USB Interface

Device to Computer Interface	USB 3.2 (5 Gbps), Type C
-------------------------------------	--------------------------

4.6 Power Requirements

The ADP2440 and ADP2450 devices require external power. An appropriate power supply is included with the device.

External Power Supply Voltage	4.5 V to 5.5 V
External Power Supply Current	4 A recommended
Barrel Connector Size	5.5 mm \times 2.1 mm (positive inner pin)

4.7 Physical Characteristics

Dimensions

Dimensions (Width x Depth x Height)	210 mm x 164.5 mm x 37.9mm (8.27" x 6.48" x 1.49")
Dimensions with connectors (Width x Depth x Height)	210 mm x 191.4 mm x 37.9mm (8.27" x 7.54" x 1.49")
Weight	993 g (2.19 lbs)

Note: If the device needs to be cleaned, wipe exterior surfaces with a dry lint-free cloth or soft-bristle brush. Do not use abrasive compounds on any part of the product. Do not disassemble or remove any part of the enclosure of the product when cleaning. Contact NI Services (ni.com/support) for more information.

¹ Maximum supported cable length is 3 meters.

Physical Connectivity

Mixed Signal Oscilloscope	Four BNC ¹
Digital I/O	One 2x10 MTE header ²
External Trigger	Two BNC ¹
Arbitrary Waveform Generator	One BNC ¹
Security Cable Slot	One, complies with Kensington security slot dimensions
USB Connectivity	One Type C
External Power Port	One 5.5 mm × 2.1 mm (positive inner pin)
DIN Rail Mounting Holes³	Two
Earth Ground Connector	One screw
Probe Compensation Tabs	One set

4.8 Safety Voltages

Connect only voltages that are within these limits.

Rated Voltages

Oscilloscope Input to GND	±25 V _{pk} for 1 MΩ ±5 V _{pk} for 50 Ω
AWG to GND	±5 V _{pk} with open circuit or high-Z load ±3.5 V _{pk} at maximum current
Digital Input to COM	±3.3 V _{pk} , ±5 V _{pk} tolerant
Digital Output to COM	±3.3 V _{pk}

Temporary Overvoltage Protection

The Analog Discovery Pro has been designed to withstand power frequency overvoltage of relatively long duration as specified below. Voltages beyond these levels may cause permanent damage.

Oscilloscope Input to GND	±50 V _{pk} for 1 MΩ input resistance ±6.5 V _{pk} for 50 Ω input resistance
AWG to GND	±15 V _{pk} , short-circuit to ground
Digital Input to COM	±20 V _{pk} , short-circuit to ground

¹ Maximum supported cable length is 3 meters.

² Use only Diligent-recommended accessories designed for the Analog Discovery Pro 2440 and Analog Discovery Pro 2450's 2x10 MTE connector, such as the kitted 2x10 flywires.

³ A pair of mounting holes to facilitate the connection to a bracket allowing the Analog Discovery Pro to be mounted alongside other devices in a DIN Rail configuration. The maximum screw length to be used is 5/16".

4.9 Environmental

Ambient Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage Temperature	-20 °C to 60 °C (-4 °F to 158 °F)
Operating Humidity	10% to 90% RH non-condensing
Storage Humidity	5% to 95% RH non-condensing
Pollution Degree	2
Maximum Altitude	2000 m

Note: For indoor use only.

4.10 Ventilation Clearance and Cooling

This product has fan vents located at both the front and rear panels. The standard airflow direction is front to back cooling. Adequate clearance is required at the front and back of the product and surrounding equipment, inclusive of indiscriminate heat generating devices, and any potential air flow blockages must be removed to ensure proper cooling.

Minimum Cooling Clearances	51 mm (2 in.) at the front and back
-----------------------------------	-------------------------------------

Note: If stacking multiple units, additional clearance may be required to accommodate increased thermal load and airflow disruption. Evaluate cooling needs based on ambient temperature and device usage.

4.11 Certifications

- CE and KC certifications
(<https://www.ni.com/product-certifications>)
- Safety, Environmental, and Regulatory Information
(https://files.digilent.com/SERI/ADP2440_2450-SERI.pdf)
- Statement of Volatility
(https://files.digilent.com/statement-of-volatility/SoV_Analog_Discovery_Pro_2440-2450.pdf)

5 Ordering Information and Purchasing Options

Digilent Part Numbers:

- 410-436 – Analog Discovery Pro (ADP2450)
- 410-436-1 – Analog Discovery Pro (ADP2440)

The Analog Discovery Pro 2440 and Analog Discovery Pro 2450 product kits each come with:

- One (1) Analog Discovery Pro device. Either the:
 - Analog Discovery Pro (ADP2450) for 410-436
 - Analog Discovery Pro (ADP2440) for 410-436-1
- Four (4) T2200 200 MHz x1/x10 Oscilloscope Probes
- One (1) 2x10 keyed flywire MTE Cable
- Twenty (20) Minigrabbers with Leads
- One (1) 2-meter USB 3.2 Type C to C cable
- One (1) 5 V, 4 Amp Switching Power Supply kit with US and EU adapters
- One (1) Quick Start Guide
- One (1) Safety, Environment, and Regulatory Information document

6 Recommended Accessories

NI Part Number: 790821-01 – DIN Rail Mounting Kit

NI Part Number: 790822-01 – DIN Rail Mounting Kit with a wall mount bracket

Digilent Part Number: 240-136 – [BNC to Minigrabber Cable](#)

Digilent Part Number: 240-134 – [BNC to Alligator Clip Cable](#)

Use of these BNC cables is recommended for analog output. BNC Oscilloscope Probes should not be used with the AWG.

7 Additional Resources

Reference material for all of Analog Discovery Pro 2000 Series devices including a getting started guide, reference manual, specifications, and tutorials on each of the instruments within WaveForms can be found on the [Analog Discovery Pro 2000 Series' Resource Center](#) on Digilent's Reference site.

8 Digilent Test and Measurement



8.1 Analog Discovery Pro Line

Digilent's Analog Discovery Pro line is for users who are ready to go pro. With expanded feature sets not offered in Digilent's Discovery Essentials including deep memory, higher bandwidth, networking capability, and USB 3.0, an Analog Discovery Pro device has already stepped up to the challenging task ahead of you.

Devices in the Analog Discovery Pro family provide the utility of professional benchtop equipment with the flexibility of a portable instrument. The series includes mixed signal oscilloscope and programmable power supply instruments that give engineers the ability to tap into the efficiency of the WaveForms software while offering a wider selection of specifications in products created with the professional in mind. Other members of the Analog Discovery Pro family include:

Analog Discovery Pro 2230

- Mixed signal oscilloscope
- BNC connectors and an aluminum case
- Two analog inputs – 50+ MHz bandwidth
- One analog output – 15 MHz bandwidth
- 16 Digital I/O
- Sample rates up to 125 MS/s
- Two programmable power supply outputs
- Deep memory buffers for long acquisitions – up to 128 MS per channel for analog input
- USB 3.0 connectivity
- Dual Mode for synchronization of multiple devices

Analog Discovery Pro 3000 Series

- Mixed signal oscilloscope
- Two or four analog inputs, two analog outputs
- 0.5 GS/s sample rate (with oversampling), per channel
- 55+ MHz bandwidth
- 16 Digital I/O
- Ethernet connectivity
- Linux Mode


Discovery USB Programmable Power Supply (DPS3340)

- USB programmable power supply
- Three channels
- 1 V to 5 V, -1 V to -15 V, 1 V to 15 V

Analog Discovery Pro 5000 Series

- Mixed signal oscilloscope
- Four analog inputs, one analog output
- 1.5 GS/s or 2 GS/s sample rate, per channel
- 350 MHz or 500 MHz bandwidth
- 34 Digital Inputs at 1 GS/s, 8 Digital I/O
- Dedicated Digital Multimeter and DC Power Supplies

8.2 Discovery Essentials

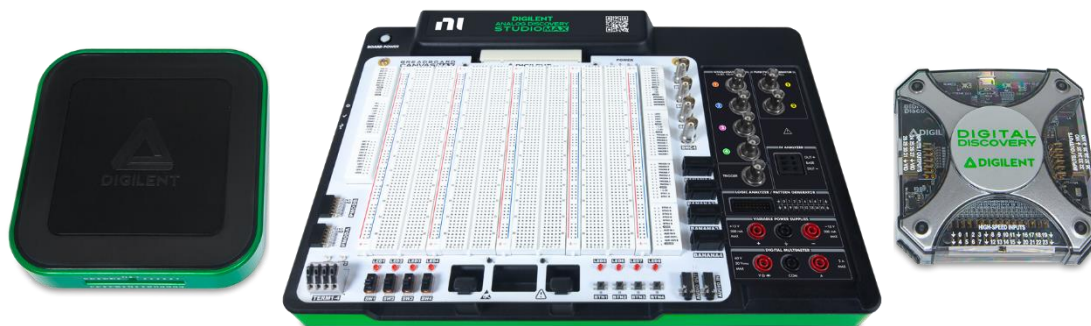

Digilent's Discovery Essentials are perfect for engineers looking for a low barrier to entry while broadening their expertise with Test and Measurement equipment. These devices are cost-optimized for students and engineers alike, provide maximum value for minimal cost. From the Digital Discovery, a dedicated workhorse for debugging digital interfaces, to the Analog Discovery Studio Max, an all-in-one electronics laboratory, to the legendary Analog Discovery 3, in conjunction with Digilent's freely available WaveForms software, each device provides a solid foundation for any engineer who needs to test or debug their projects.

Analog Discovery 3

The Analog Discovery 3 is a multi-function test and measurement device, providing a digital oscilloscope, logic analyzer, waveform generator, pattern generator, and much more — all in a device that fits in the palm of your hand. In combination with differential inputs, programmable power supplies, and the flexible WaveForms software (supported by Windows, Mac, and Linux), the Analog Discovery 3 can be used in the lab, in the field, or even at home. You're no longer tied down to a traditional benchtop and stacks of expensive test instruments.

Digital Discovery

The Digital Discovery is a combination USB logic analyzer and pattern generator, featuring 24 high-speed digital inputs and 16 digital I/O channels. With a high-speed adapter, the device can sample up to 800 MS/s on up to 8 input channels. Sampling up to 100 MS/s is supported on all channels. DDR memory offers deep input buffers, with 64 MS of input buffer per high-speed input channel.

Analog Discovery Studio Max

The Analog Discovery Studio is versatile and comprehensive electronics laboratory solution tailored for academic environment, integrating everything from a digital multimeter to spectrum analyzer and protocol generator to power supplies all in a single device. It also featuring removable Canvas modules – A modular ecosystem of top boards that let you customize the Analog Discovery Studio Max platform for your learning environment, from both Digilent and our partners around the globe. The accessibility is expanded even further beyond the WaveForms software with the LabVIEW WaveForms Toolkit to leverage LabVIEW’s extensive analysis tools.

9 About Digilent

We're committed to making engineering accessible, offering competitive pricing, portable products, and comprehensive documentation. With a global presence spanning three continents, Digilent ensures speedy and cost-effective access to our products through an extensive distribution network. Specializing in USB-based test and measurement devices, flexible and intuitive software, low-cost data acquisition and data logging tools, and AMD-based FPGA development boards, our products’ design philosophy champions your creativity. By providing world class documentation and support and keeping our hardware and software flexible and practical, we are continuing to provide the building blocks while you bring the brilliance.