
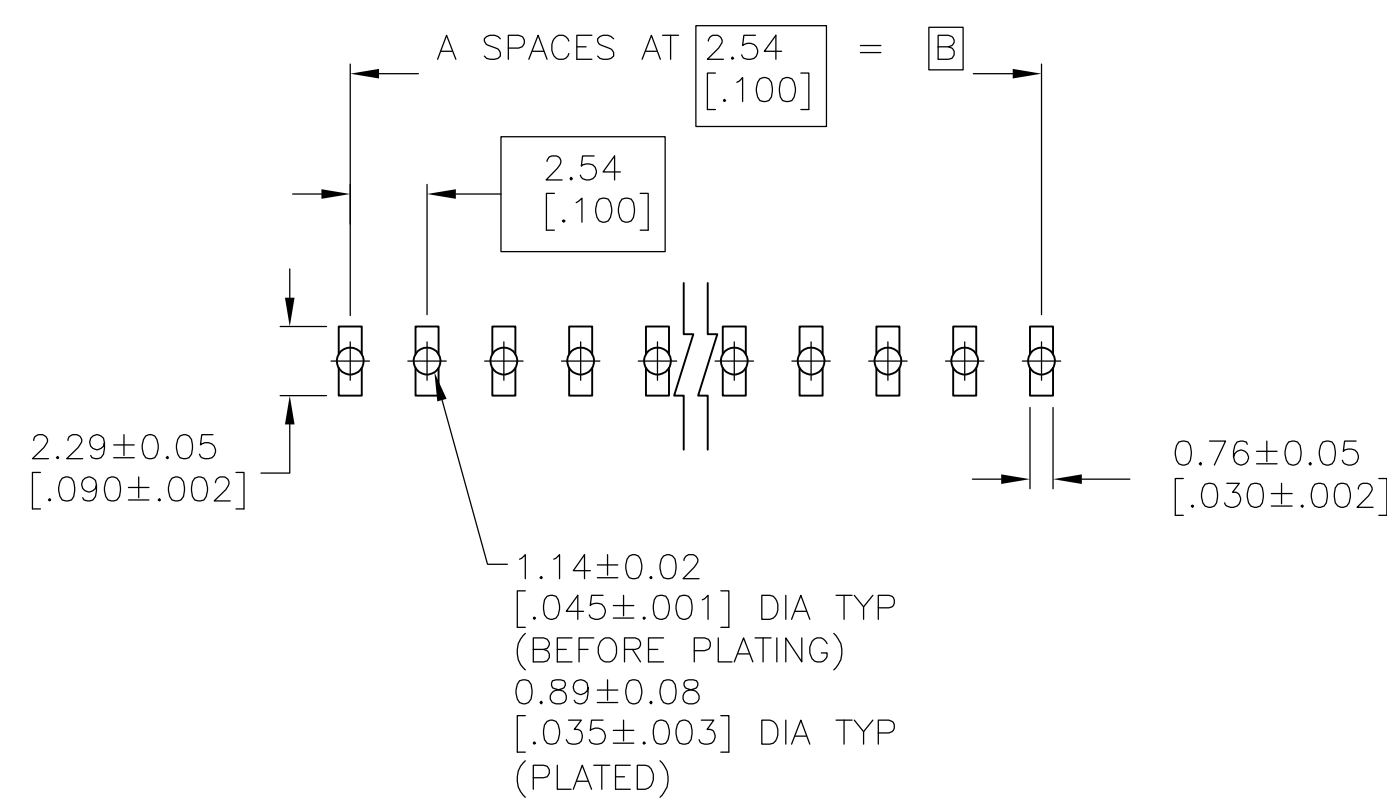


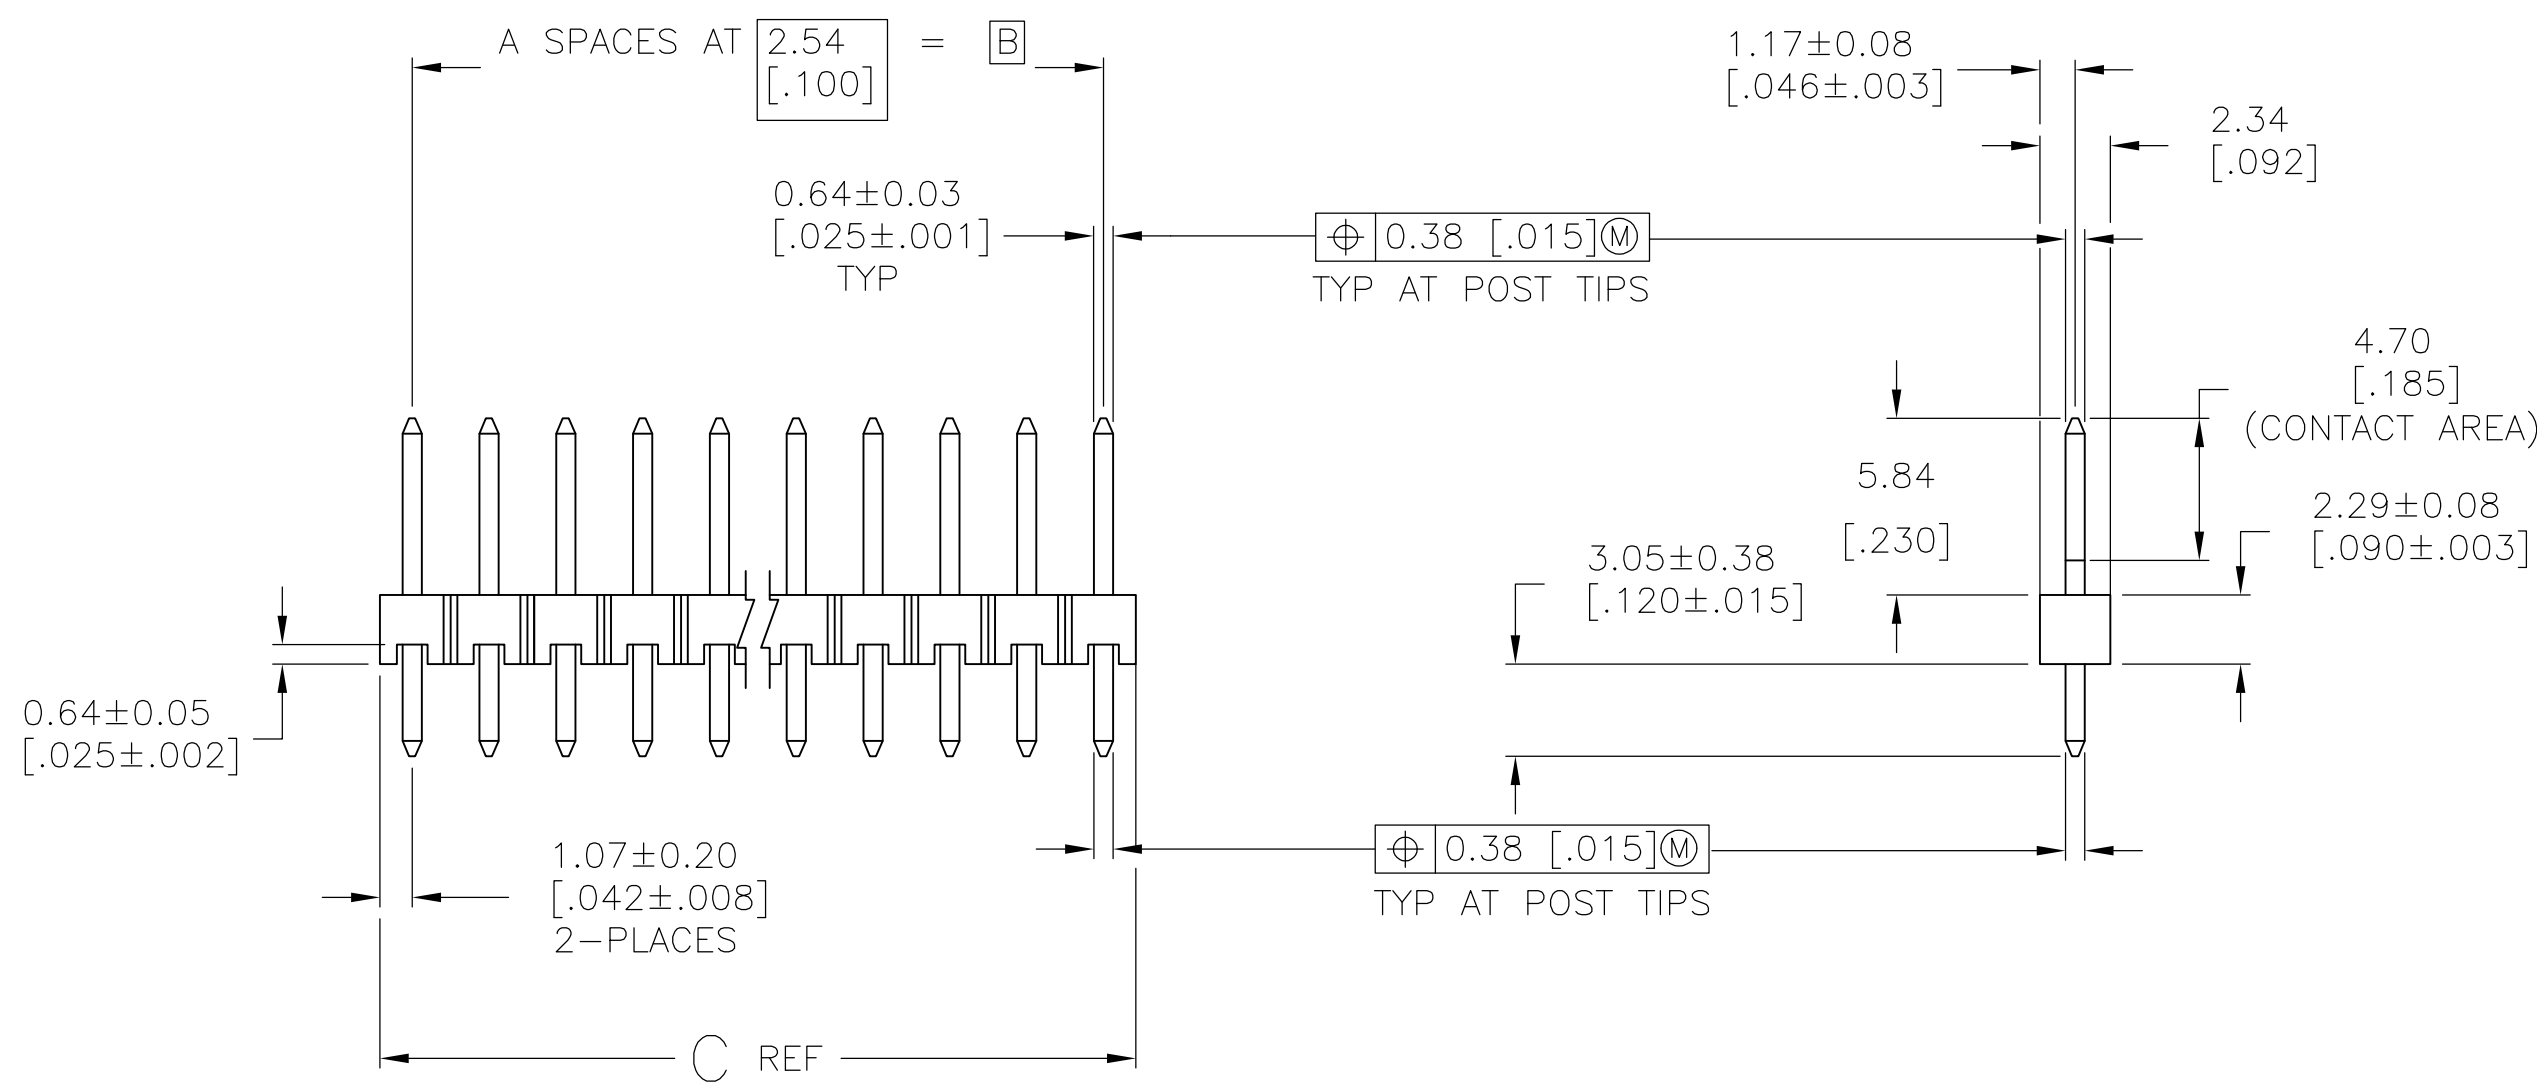

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
FOR .063 [1.60] THICK PC BOARD AND
.012 [.305] STENCIL THICK.

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS
ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

3 0.000381 [.000015] GOLD IN CONTACT AREA,
0.00254-0.00508 [.0000100-.0000200] MATTE TIN-LEAD ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.


4 MATERIAL: HOUSING - LCP, COLOR: BLACK.
POSTS - PHOSPHOR BRONZE

5 0.000381 [.000015] GOLD IN CONTACT AREA,
0.00254-0.00508 [.0000100-.0000200] MATTE TIN ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.

6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

$\triangle_5$	101.19 [3.984]	99.06 [3.900]	39	40	9-146280-0
$\triangle_5$	98.65 [3.884]	96.52 [3.800]	38	39	$\triangle_6$ 8-146280-9
$\triangle_5$	96.11 [3.784]	93.98 [3.700]	37	38	$\triangle_6$ 8-146280-8
$\triangle_5$	93.57 [3.684]	91.44 [3.600]	36	37	$\triangle_6$ 8-146280-7
$\triangle_5$	91.03 [3.584]	88.90 [3.500]	35	36	8-146280-6
$\triangle_5$	88.49 [3.484]	86.36 [3.400]	34	35	$\triangle_6$ 8-146280-5
$\triangle_5$	85.95 [3.384]	83.82 [3.300]	33	34	$\triangle_6$ 8-146280-4
$\triangle_5$	83.41 [3.284]	81.28 [3.200]	32	33	$\triangle_6$ 8-146280-3
$\triangle_5$	80.87 [3.184]	78.74 [3.100]	31	32	$\triangle_6$ 8-146280-2
$\triangle_5$	78.33 [3.084]	76.20 [3.000]	30	31	$\triangle_6$ 8-146280-1
$\triangle_5$	75.79 [2.984]	73.66 [2.900]	29	30	$\triangle_6$ 8-146280-0
$\triangle_5$	73.25 [2.884]	71.12 [2.800]	28	29	$\triangle_6$ 7-146280-9
$\triangle_5$	70.71 [2.784]	68.58 [2.700]	27	28	$\triangle_6$ 7-146280-8
$\triangle_5$	68.17 [2.684]	66.04 [2.600]	26	27	$\triangle_6$ 7-146280-7
$\triangle_5$	65.63 [2.584]	63.5 [2.500]	25	26	7-146280-6
$\triangle_5$	63.09 [2.484]	60.96 [2.400]	24	25	$\triangle_6$ 7-146280-5
$\triangle_5$	60.55 [2.384]	58.42 [2.300]	23	24	$\triangle_6$ 7-146280-4
$\triangle_5$	58.01 [2.284]	55.88 [2.200]	22	23	$\triangle_6$ 7-146280-3
$\triangle_5$	55.47 [2.184]	53.34 [2.100]	21	22	$\triangle_6$ 7-146280-2
$\triangle_5$	52.93 [2.084]	50.80 [2.000]	20	21	$\triangle_6$ 7-146280-1
$\triangle_5$	50.39 [1.984]	48.26 [1.900]	19	20	$\triangle_6$ 7-146280-0
$\triangle_5$	47.85 [1.884]	45.72 [1.800]	18	19	$\triangle_6$ 6-146280-9
$\triangle_5$	45.31 [1.784]	43.18 [1.700]	17	18	$\triangle_6$ 6-146280-8
$\triangle_5$	42.77 [1.684]	40.64 [1.600]	16	17	$\triangle_6$ 6-146280-7
$\triangle_5$	40.23 [1.584]	38.10 [1.500]	15	16	$\triangle_6$ 6-146280-6
$\triangle_5$	37.69 [1.484]	35.56 [1.400]	14	15	6-146280-5
$\triangle_5$	35.15 [1.384]	33.02 [1.300]	13	14	6-146280-4
$\triangle_5$	32.61 [1.284]	30.48 [1.200]	12	13	$\triangle_6$ 6-146280-3
$\triangle_5$	30.07 [1.184]	27.94 [1.100]	11	12	$\triangle_6$ 6-146280-2
$\triangle_5$	27.53 [1.084]	25.40 [1.000]	10	11	6-146280-1
$\triangle_5$	24.99 [.984]	22.86 [.900]	9	10	6-146280-0
$\triangle_5$	22.45 [.884]	20.32 [.800]	8	9	5-146280-9
$\triangle_5$	19.91 [.784]	17.78 [.700]	7	8	5-146280-8
$\triangle_5$	17.37 [.684]	15.24 [.600]	6	7	5-146280-7
$\triangle_5$	14.83 [.584]	12.70 [.500]	5	6	5-146280-6
$\triangle_5$	12.29 [.484]	10.16 [.400]	4	5	5-146280-5
$\triangle_5$	9.75 [.384]	7.62 [.300]	3	4	5-146280-4
$\triangle_5$	7.21 [.284]	5.08 [.200]	2	3	5-146280-3
$\triangle_5$	4.67 [.184]	2.54 [.100]	1	2	5-146280-2
$\triangle_5$	2.13 [.084]	- [-]	0	1	5-146280-1
PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

$\triangle_5$	7.21 [.284]	5.08 [.200]	2	3	5-146280-3
$\triangle_3$	101.19 [3.984]	99.06 [3.900]	39	40	4-146280-0
$\triangle_3$	98.65 [3.884]	96.52 [3.800]	38	39	$\triangle_6$ 3-146280-9
$\triangle_3$	96.11 [3.784]	93.98 [3.700]	37	38	$\triangle_6$ 3-146280-8
$\triangle_3$	93.57 [3.684]	91.44 [3.600]	36	37	$\triangle_6$ 3-146280-7
$\triangle_3$	91.03 [3.584]	88.90 [3.500]	35	36	$\triangle_6$ 3-146280-6
$\triangle_3$	88.49 [3.484]	86.36 [3.400]	34	35	$\triangle_6$ 3-146280-5
$\triangle_3$	85.95 [3.384]	83.82 [3.300]	33	34	$\triangle_6$ 3-146280-4
$\triangle_3$	83.41 [3.284]	81.28 [3.200]	32	33	$\triangle_6$ 3-146280-3
$\triangle_3$	80.87 [3.184]	78.74 [3.100]	31	32	$\triangle_6$ 3-146280-2
$\triangle_3$	78.33 [3.084]	76.20 [3.000]	30	31	$\triangle_6$ 3-146280-1
$\triangle_3$	75.79 [2.984]	73.66 [2.900]	29	30	$\triangle_6$ 3-146280-0
$\triangle_3$	73.25 [2.884]	71.12 [2.800]	28	29	$\triangle_6$ 2-146280-9
$\triangle_3$	70.71 [2.784]	68.58 [2.700]	27	28	$\triangle_6$ 2-146280-8
$\triangle_3$	68.17 [2.684]	66.04 [2.600]	26	27	$\triangle_6$ 2-146280-7
$\triangle_3$	65.63 [2.584]	63.5 [2.500]	25	26	$\triangle_6$ 2-146280-6
$\triangle_3$	63.09 [2.484]	60.96 [2.400]	24	25	$\triangle_6$ 2-146280-5
$\triangle_3$	60.55 [2.384]	58.42 [2.300]	23	24	$\triangle_6$ 2-146280-4
$\triangle_3$	58.01 [2.284]	55.88 [2.200]	22	23	$\triangle_6$ 2-146280-3
$\triangle_3$	55.47 [2.184]	53.34 [2.100]	21	22	$\triangle_6$ 2-146280-2
$\triangle_3$	52.93 [2.084]	50.80 [2.000]	20	21	$\triangle_6$ 2-146280-1
$\triangle_3$	50.39 [1.984]	48.26 [1.900]	19	20	$\triangle_6$ 2-146280-0
$\triangle_3$	47.85 [1.884]	45.72 [1.800]	18	19	$\triangle_6$ 1-146280-9
$\triangle_3$	45.31 [1.784]	43.18 [1.700]	17	18	$\triangle_6$ 1-146280-8
$\triangle_3$	42.77 [1.684]	40.64 [1.600]	16	17	$\triangle_6$ 1-146280-7
$\triangle_3$	40.23 [1.584]	38.10 [1.500]	15	16	$\triangle_6$ 1-146280-6
$\triangle_3$	37.69 [1.484]	35.56 [1.400]	14	15	$\triangle_6$ 1-146280-5
$\triangle_3$	35.15 [1.384]	33.02 [1.300]	13	14	$\triangle_6$ 1-146280-4
$\triangle_3$	32.61 [1.284]	30.48 [1.200]	12	13	$\triangle_6$ 1-146280-3
$\triangle_3$	30.07 [1.184]	27.94 [1.100]	11	12	$\triangle_6$ 1-146280-2
$\triangle_3$	27.53 [1.084]	25.40 [1.000]	10	11	1-146280-1
$\triangle_3$	24.99 [.984]	22.86 [.900]	9	10	$\triangle_6$ 1-146280-0
$\triangle_3$	22.45 [.884]	20.32 [.800]	8	9	$\triangle_6$ 146280-9
$\triangle_3$	19.91 [.784]	17.78 [.700]	7	8	146280-8
$\triangle_3$	17.37 [.684]	15.24 [.600]	6	7	$\triangle_6$ 146280-7
$\triangle_3$	14.83 [.584]	12.70 [.500]	5	6	$\triangle_6$ 146280-6
$\triangle_3$	12.29 [.484]	10.16 [.400]	4	5	$\triangle_6$ 146280-5
$\triangle_3$	9.75 [.384]	7.62 [.300]	3	4	$\triangle_6$ 146280-4
$\triangle_3$	7.21 [.284]	5.08 [.200]	2	3	$\triangle_6$ 146280-3
$\triangle_3$	4.67 [.184]	2.54 [.100]	1	2	146280-2
$\triangle_3$	2.13 [.084]	- [-]	0	1	$\triangle_6$ 146280-1
PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 6/12/95 L. HOFFMAN CHK. 3/18/96 G. DUBNICZKI APP'D. 3/18/96 G. DUBNICZKI		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± 0.51 [02] 2 PLC ± 0.127 [005] 3 PLC ± 0.0127 [0005] ANGLES ± — FINISH		NAME HEADER ASSEMBLY, MOD II, BREAKWAY, SINGLE ROW, HIGH TEMPERATURE, VERTICAL W/025 SQ POSTS, 1.00 €	
		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A1 00779 C-146280	
MATERIAL 		WEIGHT —		RESTRICTED TO —	
SEE TABLE		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 of 1 REV G	