


AS-Interface control cabinet module

SmartL25 4DI AUX 4DO T C

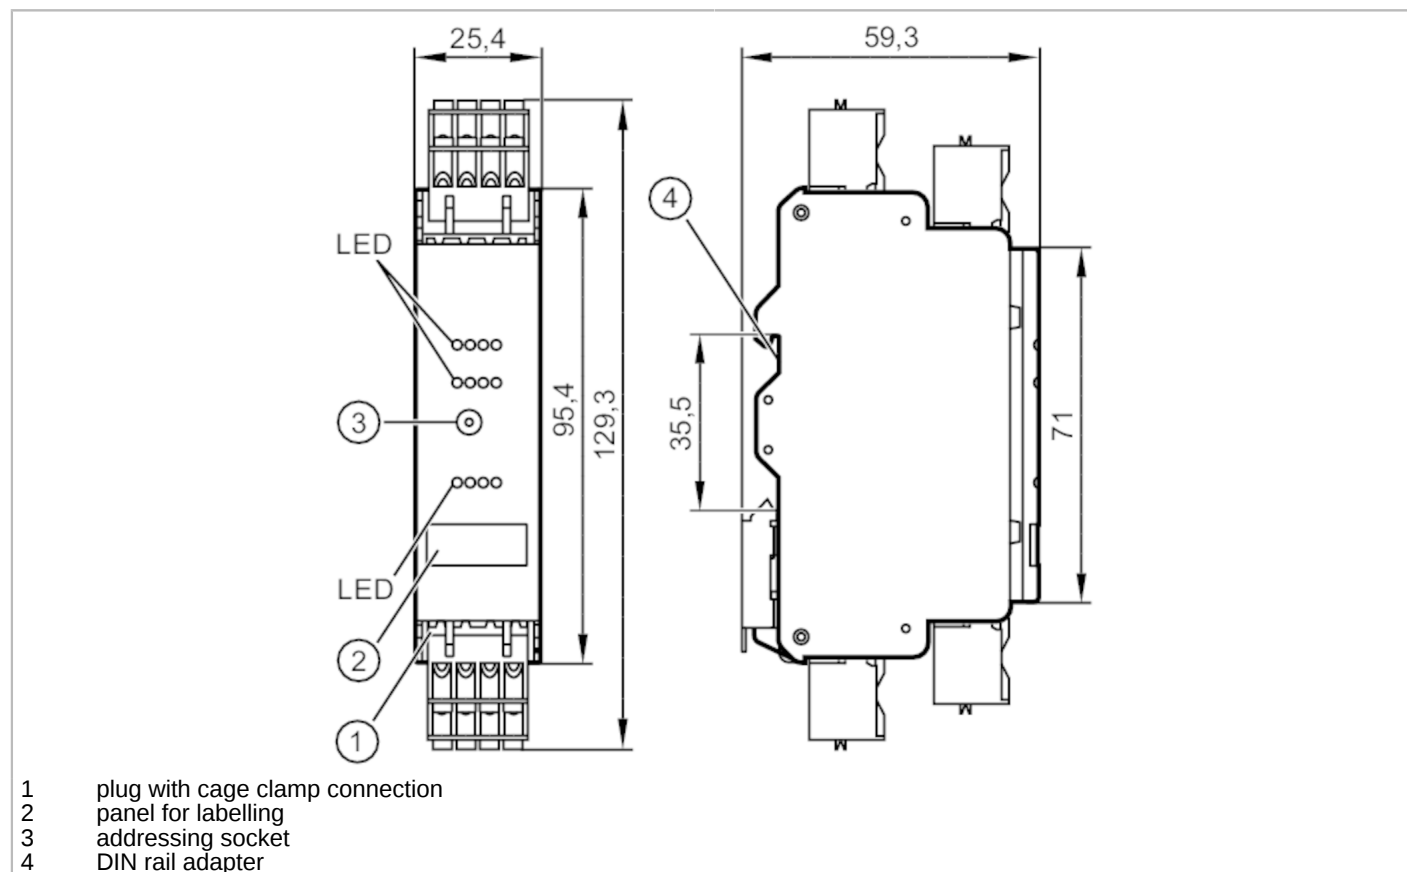

Application

Application

Installation in control cabinets

Electrical data

Operating voltage	[V]	18...31.6 DC
Max. current consumption from AS-i	[mA]	30
Additional voltage supply	[V]	20...30 DC; (AUX)
Max. current consumption from additional supply	[mA]	5100; (AUX)
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs

Number of digital inputs: 4; Number of digital outputs: 4

Inputs

Number of digital inputs		4
Input circuit of digital inputs		PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs		AUX
Power supply	[V]	18...30; (DC)
Max. total current rating of inputs	[mA]	1000
Input current High	[mA]	6...10
Input current Low	[mA]	0...2



AS-Interface control cabinet module

SmartL25 4DI AUX 4DO T C

Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes
Outputs		
Number of digital outputs		4
Circuit		PNP
Voltage range DC	[V]	20...30; (AUX)
Max. current load per output	[mA]	1000; (utilisation category DC-12: 700 mA; utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))
Max. current load outputs total	[A]	4
Short-circuit proof		yes
Electrically separated		yes
Actuator supply outputs		AUX
Operating conditions		
Ambient temperature	[°C]	-25...60
Note on ambient temperature		the derating of the current load indicated in the operating instructions is to be taken into account at the following ambient temperature: > 40 °C
Storage temperature	[°C]	-25...75
Max. relative air humidity	[%]	90; (non condensing)
Max. height above sea level	[m]	2000
Protection		IP 20
Protection rating terminals		IP 20
Pollution degree		2
Tests / approvals		
EMC		EN 62026-2 EN 61000-6-2 EN 61000-6-3
MTTF	[years]	277
Notes		The device shall be supplied from an isolating source.; This voltage source must have a secondary UL-listed fuse (see enclosed sheet).; Alternatively, a class 2 power supply can be used to supply AUX.
AS-i classification		
AS-i version		2.11; 3.0
AS-i addressing		addressing socket
Extended addressing mode		no
AS-i master profile		M2; M3; M4
AS-i profile		S-7.0.E
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	0.E
Assignment of the data bits	data bit	D0 D1 D2 D3
	input	I-1 I-2 I-3 I-4
	Output	O-1 O-2 O-3 O-4
Mechanical data		
Weight	[g]	117.9
Housing		housing for DIN rail mounting



AS-Interface control cabinet module

SmartL25 4DI AUX 4DO T C

Type of mounting	mounting on DIN rail
Dimensions [mm]	129.3 x 25.4 x 59.3
Materials	plastics; PC-GF20

Displays / operating elements

Display	switching status	LED, yellow I1...I4, O1...O4
	operation	LED, green AS-i, AUX
	errors	LED, red

Accessories

Items supplied	cage clamps
----------------	-------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

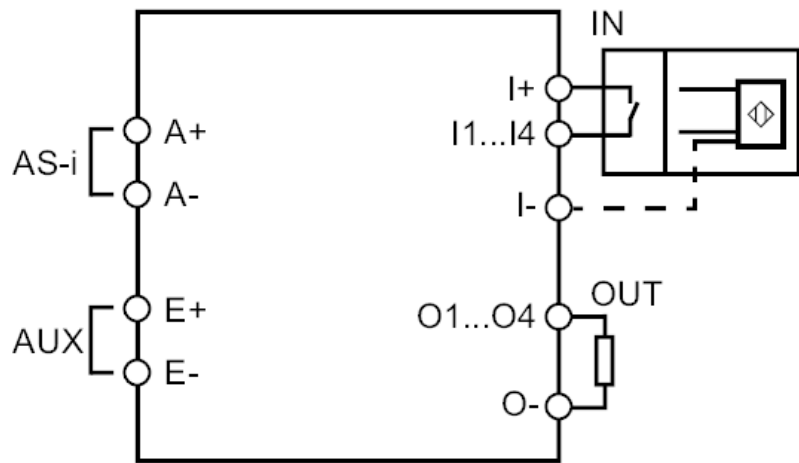

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24V
I-	Sensor supply 0V
E+	external voltage supply for sensors/actuators +24V (AUX)
E-	external voltage supply for sensors/actuators 0V (AUX)
I1...I4	switching input sensor 1...4
O1...O4	switching output actuator 1...4
O-	switching output actuator 0V