


Product description	M12 Square female panel mount connector, Contacts: 5, unshielded, single wires, IP40, UL 2238, M3 (4x), Front mounting
Area	M12-A
Coding	A-coded
Series	763
Part no.	76 0932 0111 00005-0200


Illustration



Scale drawing



Contact arrangement (Plug-in side)



You can find the assembly instructions on the next page.

Technical data

General features

Part no.	76 0932 0111 00005-0200
Notice	Alternative part no.: 09 3458 00 05 Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.
Connector design	Square female panel mount connector
Type standard	DIN EN 61076-2-101
Coding	A-coded
Wire length	0.2 m (Standard 0.2m. Other lengths are available on request).
Version	Connector socket straight
Connector locking system	screw
Termination	single wires
Degree of protection	IP40 IP67 with seal, see accessories
Connection cross-section	0.25 mm ² / AWG 24
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	17.45
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	60 V
Rated voltage UL	2460
Rated impulse voltage	1500 V
Rated current	4 A (3 A UL)

Product data sheet

Automation technology - Sensors and actuators



Product description	M12 Square female panel mount connector, Contacts: 5, unshielded, single wires, IP40, UL 2238, M3 (4x), Front mounting
Area	M12-A
Coding	A-coded
Series	763
Part no.	76 0932 0111 00005-0200

Insulation resistance	> 10 ⁸ Ω
Pollution degree	3
Overvoltage category	II
Insulating material group	III
EMC compliance	unshielded

Material

Housing material	CuZn (Brass nickel plated)
Contact body material	PA black
Contact material	CuSn (bronze)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	1224bca3-b20c-4d82-8c1e-4dbf01b7c818

Authorization/approvals


Approvals	UL 2238
-----------	---------

Classifications

eCl@ss 11.1	27-44-01-03
ETIM 9.0	EC003570

Product description	M12 Square female panel mount connector, Contacts: 5, unshielded, single wires, IP40, UL 2238, M3 (4x), Front mounting
Area	M12-A
Coding	A-coded
Series	763
Part no.	76 0932 0111 00005-0200

Assembly instructions / Panel cut-out

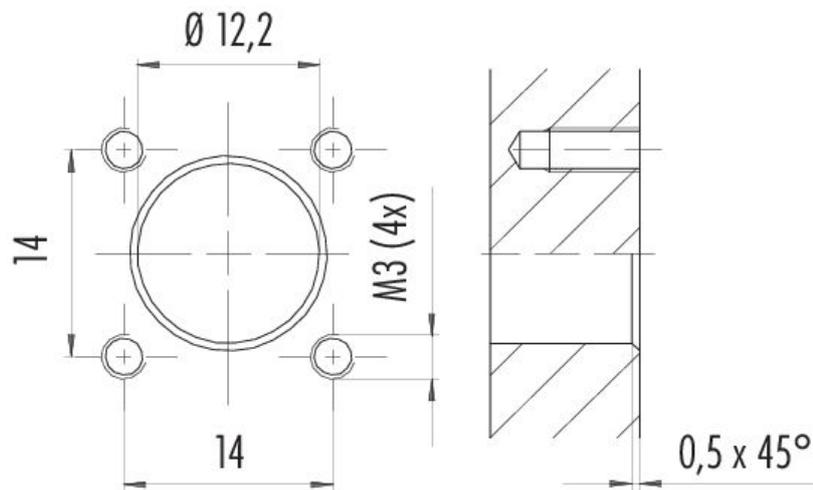

Product description	M12 Square female panel mount connector, Contacts: 5, unshielded, single wires, IP40, UL 2238, M3 (4x), Front mounting
Area	M12-A
Coding	A-coded
Series	763
Part no.	76 0932 0111 00005-0200

General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).

The user must take appropriate safety precautions to ensure that the connector cannot be accidentally disconnected. In addition, the user must ensure that the cable is suitably secured.