


# AC3200



## AS-Interface control cabinet module

SmartL25 4DI 4DO T C

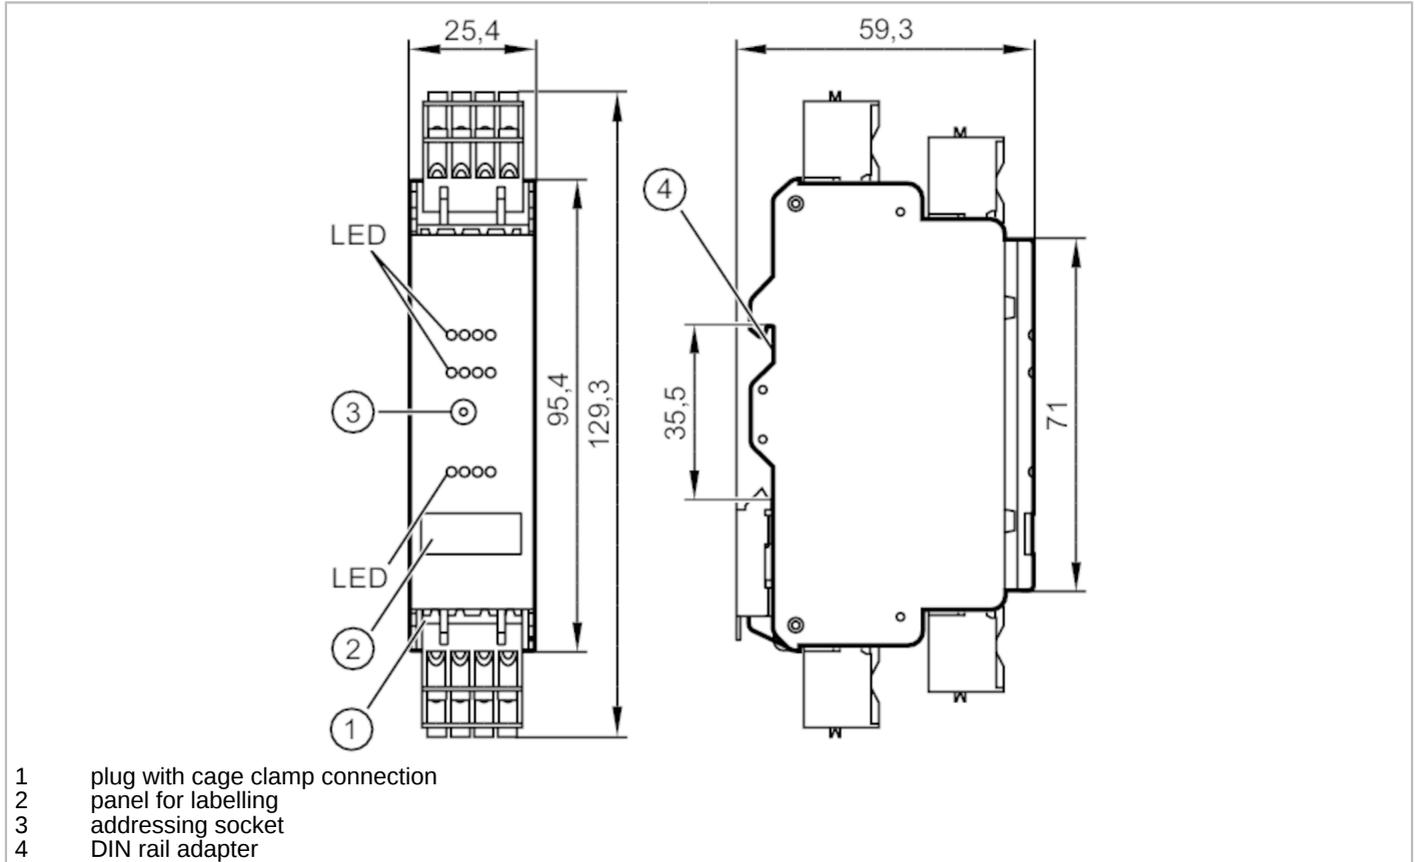

Application	
Design	only for operation with AS-i masters with the profile M4
Application	Installation in control cabinets
Electrical data	
Operating voltage [V]	18...31.6 DC
Max. current consumption from AS-i [mA]	250
Additional voltage supply [V]	20...30 DC; (AUX)
Max. current consumption from additional supply [mA]	4000; (AUX)
Integrated watchdog	yes
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4
Inputs	
Number of digital inputs	4
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs	AS-i
Power supply [V]	18...30; (DC)
Max. total current rating of inputs [mA]	200
Input current High [mA]	6...10



## AS-Interface control cabinet module

SmartL25 4DI 4DO T C

Input current Low	[mA]	0...2
Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes

### Outputs

Number of digital outputs		4
Circuit		PNP
Voltage range DC	[V]	20...30; (AUX)
Max. current load per output	[mA]	1000; (utilisation category DC-12: 700 mA; utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))
Max. current load outputs total	[A]	4
Short-circuit proof		yes
Electrically separated		yes
Actuator supply outputs		AUX

### Operating conditions

Ambient temperature	[°C]	-25...60
Note on ambient temperature		the derating of the current load indicated in the operating instructions is to be taken into account at the following ambient temperature: > 40 °C
Storage temperature	[°C]	-25...75
Max. relative air humidity	[%]	90; (non condensing)
Max. height above sea level	[m]	2000
Protection		IP 20
Protection rating terminals		IP 20
Pollution degree		2

### Tests / approvals

EMC		EN 62026-2
		EN 61000-6-2
		EN 61000-6-3
MTTF	[years]	261
Notes		The device shall be supplied from an isolating source.; This voltage source must have a secondary UL-listed fuse (see enclosed sheet).; Alternatively, a class 2 power supply can be used to supply AUX.

### AS-i classification

AS-i version		3.0															
AS-i addressing		addressing socket															
Extended addressing mode		yes															
AS-i master profile		M4															
AS-i profile		S-7.A.7															
AS-i I/O configuration	[hex]	7															
AS-i ID code	[hex]	A.7															
AS-i ID1 code	[hex]	7; (fixed)															
AS-i certificate		124401															
Assignment of the data bits		<table border="1"> <thead> <tr> <th>data bit</th> <th>D0</th> <th>D1</th> <th>D2</th> <th>D3</th> </tr> </thead> <tbody> <tr> <td>input</td> <td>I-1</td> <td>I-2</td> <td>I-3</td> <td>I-4</td> </tr> <tr> <td>Output</td> <td>O-1</td> <td>O-2</td> <td>O-3</td> <td>O-4</td> </tr> </tbody> </table>	data bit	D0	D1	D2	D3	input	I-1	I-2	I-3	I-4	Output	O-1	O-2	O-3	O-4
data bit	D0	D1	D2	D3													
input	I-1	I-2	I-3	I-4													
Output	O-1	O-2	O-3	O-4													



## AS-Interface control cabinet module


SmartL25 4DI 4DO T C

Mechanical data		
Weight	[g]	136.5
Housing		housing for DIN rail mounting
Type of mounting		mounting on DIN rail
Dimensions	[mm]	129.3 x 25.4 x 59.3
Materials		plastics; PC-GF20
Displays / operating elements		
Display	switching status	LED, yellow I1...I4, O1...O4
	operation	LED, green AS-i, AUX
	errors	LED, red
Accessories		
Items supplied		cage clamps
Remarks		
Remarks	Do not connect any of the following points to an external potential: I-, I+, I1, I2, I3, I4 The connections are electrically connected with the AS-i cable.	
Pack quantity		1 pcs.

### Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

#### Connection

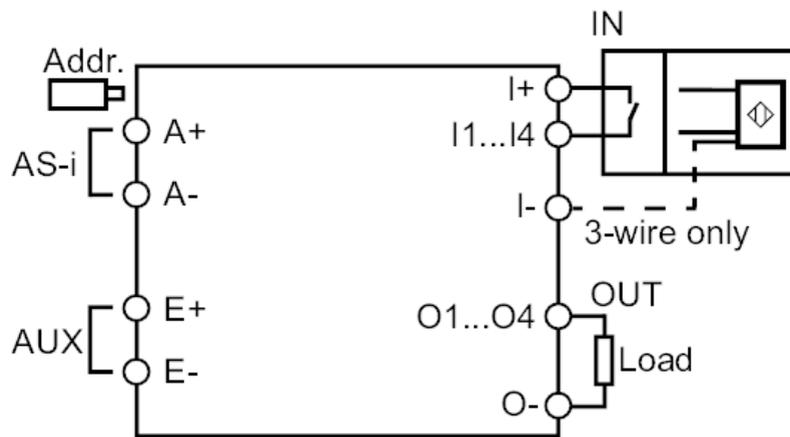

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24 V
I-	Sensor supply 0 V
E+	external voltage supply for actuators +24V (AUX)
E-	external voltage supply for actuators 0V (AUX)
I1...I4	switching input sensor 1...4
O1...O4	switching output actuator 1...4
O-	switching output actuator 0V