

OVERLOAD RELAY 20...80 A FOR MOTOR PROTECTION SIZE S2, CLASS 10E FOR MOUNTING ONTO CONTACTORS MAIN CIRCUIT: SCREW TERMINAL AUX. CIRCUIT: SCREW TERMINAL MANUAL-AUTOMATIC-RESET



Figure similar

product brand name	SIRIUS
Product designation	solid-state overload relay
General technical data:	
Size of overload relay	S2
Size of contactor can be combined company-specific	S2
Active power loss total typical	4.6 W
Insulation voltage with degree of pollution 3 Rated value	690 V
Surge voltage resistance Rated value	6 kV
Protection class IP	
• on the front	IP20
• of the terminal	IP00
Shock resistance	
• acc. to IEC 60068-2-27	15g / 11 ms
Vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s²; 10 cycles
Recovery time	
• after overload trip with automatic reset typical	3 min
• after overload trip with remote-reset	0 min
• after overload trip with manual reset	0 min

Type of assignment	2
Type of protection	II (2) G [Ex e] [Ex d] [Ex px] II (2) D [Ex t] [Ex p]
Certificate of suitability relating to ATEX	PTB 09 ATEX 3001
Protection against electrical shock	finger-safe when touched vertically from front acc. to IEC 60529
Equipment marking acc. to DIN EN 81346-2	F

#### Ambient conditions:

Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C
Temperature compensation	60 ... -25 °C
Relative humidity during operation	0 ... 95 %

#### Main circuit:

Number of poles for main current circuit	3
Adjustable response value current of the current-dependent overload release	20 ... 80 A
Operating voltage	
• Rated value	690 V
• at AC-3 Rated value maximum	690 V
Operating frequency Rated value	50 ... 60 Hz

#### Auxiliary circuit:

Design of the auxiliary switch	integrated
Number of NC contacts	
• for auxiliary contacts	1
— Note	for contactor disconnection
Number of NO contacts	
• for auxiliary contacts	1
— Note	for message "tripped"
Number of CO contacts	
• for auxiliary contacts	0
Operating current of the auxiliary contacts at AC-15	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
Operating current of the auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A

• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A

#### Protective and monitoring functions:

<b>Trip class</b>	CLASS 10E
<b>Design of the overload release</b>	electronic
<b>Response time of the ground fault protection in settled state</b>	1 000 ms

#### UL/CSA ratings:

<b>Full-load current (FLA) for three-phase AC motor</b>	
• at 480 V Rated value	80 A
• at 600 V Rated value	80 A
<b>Contact rating of the auxiliary contacts acc. to UL</b>	B600 / R300

#### Short-circuit protection

<b>Design of the fuse link</b>	
• for short-circuit protection of the main circuit — required	Fuse gG: 250 A
• for short-circuit protection of the auxiliary switch required	fuse gG: 6 A

#### Installation/ mounting/ dimensions:

<b>mounting position</b>	any
<b>Mounting type</b>	direct mounting
<b>Height</b>	99 mm
<b>Width</b>	55 mm
<b>Depth</b>	104 mm
<b>Required spacing</b>	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	10 mm
— at the side	0 mm
• for grounded parts	
— forwards	10 mm
— Backwards	0 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— Backwards	0 mm

— upwards	10 mm
— downwards	10 mm
— at the side	10 mm

#### Connections/ Terminals:

<b>Product function</b>	
<ul style="list-style-type: none"> <li>removable terminal for auxiliary and control circuit</li> </ul>	Yes
<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>for main current circuit</li> </ul>	screw-type terminals
<ul style="list-style-type: none"> <li>for auxiliary and control current circuit</li> </ul>	screw-type terminals
<b>Arrangement of electrical connectors for main current circuit</b>	Top and bottom
<b>Type of connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>single or multi-stranded</li> </ul> </li> </ul>	1x (1 ... 50 mm <sup>2</sup> ), 2x (1 ... 35 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	1x (1 ... 35 mm <sup>2</sup> ), 2x (1 ... 25 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>for AWG conductors for main contacts</li> </ul>	2x (18 ... 2), 1x (18 ... 1)
<b>Type of connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>single or multi-stranded</li> </ul> </li> </ul>	1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 2,5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	1x (0,5 ... 2,5 mm <sup>2</sup> ), 2x (0,5 ... 1,5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>for AWG conductors for auxiliary contacts</li> </ul>	1x (20 ... 14), 2x (20 ... 14)
<b>Tightening torque</b>	
<ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> </ul>	3 ... 4,5 N·m
<ul style="list-style-type: none"> <li>for auxiliary contacts with screw-type terminals</li> </ul>	0,8 ... 1,2 N·m
<b>Design of screwdriver shaft</b>	Diameter 5 to 6 mm
<b>Design of the thread of the connection screw</b>	
<ul style="list-style-type: none"> <li>for main contacts</li> </ul>	M6
<ul style="list-style-type: none"> <li>of the auxiliary and control contacts</li> </ul>	M3

#### Safety related data:

<b>Proportion of dangerous failures</b>	
<ul style="list-style-type: none"> <li>with low demand rate acc. to SN 31920</li> </ul>	35 %

#### Communication/ Protocol:

<b>Protocol is supported</b>	
<ul style="list-style-type: none"> <li>IO-Link protocol</li> </ul>	No
<b>Type of voltage supply via input/output link master</b>	No

#### Electromagnetic compatibility:

<b>Conducted interference due to burst acc. to IEC 61000-4-4</b>	2 kV (power ports), 1 kV (signal ports)
<b>Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5</b>	2 kV (line to ground)

Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV (line to line)
Conducted interference due to high-frequency radiation acc. to IEC 61000-4-6	10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge






#### Display:

##### Display version

- for switching status

Slide switch

#### Certificates/ approvals:

General Product Approval		For use in hazardous locations	Declaration of Conformity	Test Certificates
 CSA	 EAC	 UL	 ATEX	 EG-Konf.
				<a href="#">Typprüfbescheinigung/Werkszeugnis</a>

#### other

[Bestätigungen](#)

[Umweltbestätigung](#)

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

##### Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB30361WB0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB30361WB0>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB30361WB0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB30361WB0&lang=en)

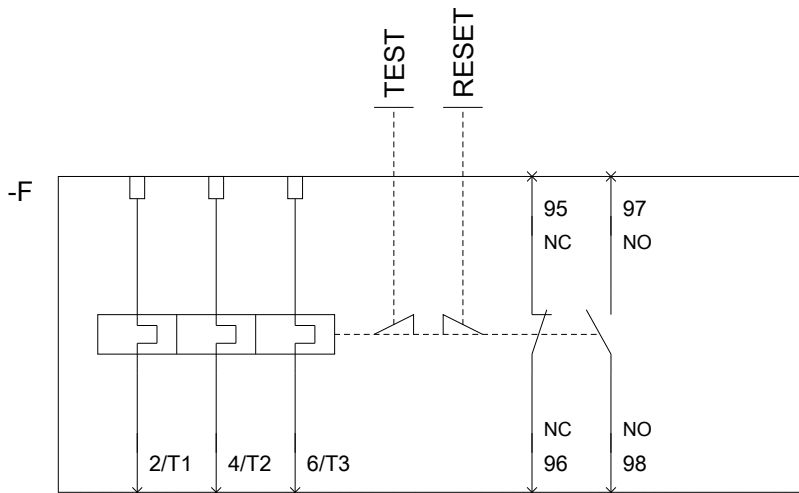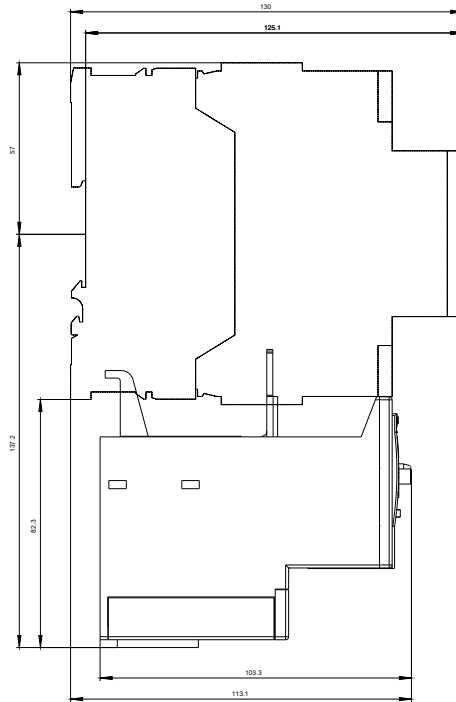

last modified:

10.08.2015