



Brand of NTN corporation

Technical data

6208HT200ZZ

Single row deep groove ball bearings



TOPLINE deep groove ball bearing, radial contact, pressed steel cage, shields on both sides, applications up to 200°C.

TOPLINE

VISUAL (S)




NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

6208HT200ZZ

Single row deep groove ball bearings

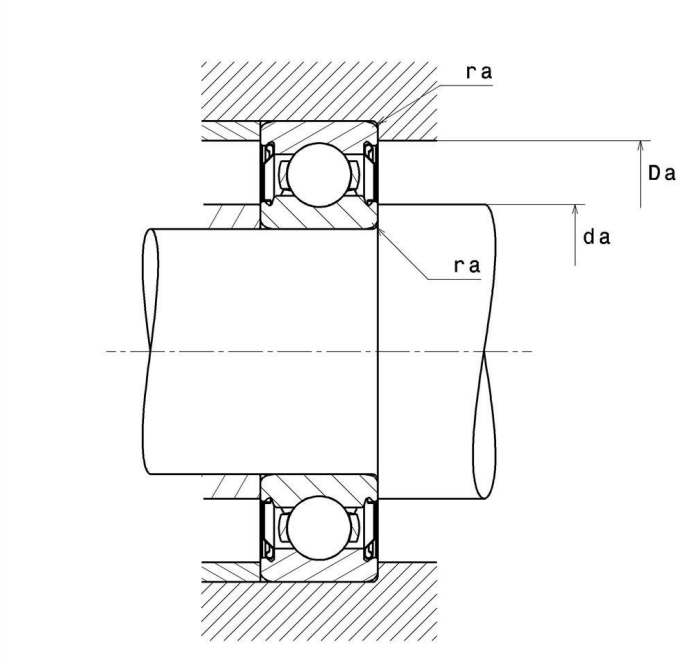

PRODUCT DEFINITION

Brand	SNR
d - Internal diameter	40 mm
D - External diameter	80 mm
B - Bearing/Inner ring width	18 mm
d1 - External diameter inner ring	50,3 mm
D1 - Inner diameter outer ring	70,4 mm
rs - Min fillet radius	1,1 mm
Radial clearance class	C4
Mass	0,364 kg

PRODUCT PERFORMANCE

C - Dynamic load	30700000 mN
C0 - Static load	17900000 mN
Cu - Fatigue limit load	810000 mN



6208HT200ZZ

Single row deep groove ball bearings

PRODUCT PERFORMANCE

f0 - Coefficient	14
N lim - Mechanical Limit Speed	23400 °/s
Tmin - Min operating temperature	233,15 °K
Tmax - Max operating temperature	473,15 °K

BEARING FREQUENCIES

BPFO - Over rolling frequency on outer ring (60 rpm)	3.607 Hz
BPFI - Over rolling frequency on inner (60 rpm)	5.393 Hz
BSF - Over rolling frequency on rolling element (60 rpm)	4.841 Hz
BRF - Rotational frequency - rolling element (60 rpm)	2.421 Hz
FTF - Rotational frequency - cage (60 rpm)	0.401 Hz

ABUTMENT

da min - Min shoulder diameter IR	46,5 mm
da max - Max shoulder diameter IR	50,3 mm
Da max - Max shoulder diameter OR	73,5 mm
ra max - Max shaft & housing fillet radius	1 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$P = X.F_r + Y.F_a$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$P_0 = X_0.F_r + Y_0.F_a$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$

