

# Self-Oscillating Half-Bridge Driver

#### **Features**

- Floating channel designed for bootstrap operation
- Integrated 600V half-bridge gate driver
- 15.6V zener clamp on Vcc
- True micropower start up
- Tighter initial dead time control
- Low temperature coefficient dead time
- Shutdown feature (1/6th Vcc) on CT pin
- Increased undervoltage lockout Hysteresis (1V)
- Lower power level-shifting circuit
- Constant LO, HO pulse widths at startup
- Lower di/dt gate driver for better noise immunity
- Low side output in phase with RT
- Excellent latch immunity on all inputs and outputs
- ESD protection on all leads


#### **Product Summary**

Voffset	600V max.
Duty Cycle	50%
$T_r  /  T_f$	80 / 40 ns
$V_{CLAMP}$	15.6V
Dead time (typ.)	1.2 μs

#### **Description**

The IR25603(S) incorporates a high voltage half-bridge gate driver with a front end oscillator similar to the industry standard CMOS 555 timer. A shutdown feature has been designed into the CT pin, so that both gate driver outputs can be disabled using a low voltage control signal. In addition, the gate driver output pulse widths are the same once the rising undervoltage lockout threshold on Vcc has been reached, resulting in a more stable profile of frequency vs time at startup. Special attention has been paid to maximizing the latch immunity of the device and providing comprehensive ESD protection on all pins.

## **Package Options**




## **Ordering Information**

Dana Bart Namel an	Package Type	Standar	d Pack	On level to Boot Nevel on	
Base Part Number Package Typ		Form	Quantity	Orderable Part Number	
IR25603SPBF	SO8N	Tube	95	IR25603SPBF	
IR25603SPBF	SO8N	Tape and Reel	2500	IR25603STRPBF	



# **Typical Connection Diagram**

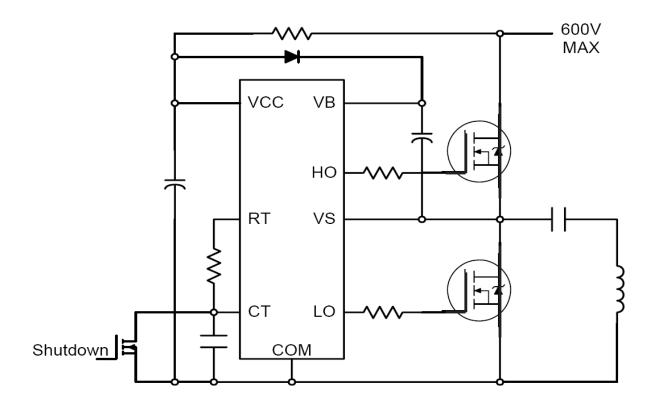



#### **Absolute Maximum Ratings**

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM, all currents are defined positive into any lead. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min.	Max.	Units
V <sub>B</sub>	High side floating absolute voltage	-0.3	625	
Vs	High side floating supply offset voltage	V <sub>B</sub> - 25	V <sub>B</sub> + 0.3	
V <sub>HO</sub>	High side floating output voltage	V <sub>S</sub> - 0.3	V <sub>B</sub> + 0.3	
$V_{LO}$	Low side output voltage	-0.3	V <sub>CC</sub> + 0.3	V
V <sub>CC</sub>	Low side and logic fixed supply voltage	-0.3	25	
V <sub>RT</sub>	R <sub>T</sub> pin voltage	-0.3	V <sub>CC</sub> + 0.3	
V <sub>CT</sub>	C <sub>T</sub> pin voltage	-0.3	V <sub>CC</sub> + 0.3	
Icc	Supply current <sup>†</sup>	_	25	Л
I <sub>RT</sub>	R <sub>T</sub> pin current	-5	5	⊢ mA
dVs/dt	Allowable offset supply voltage transient	_	50	V/ns
$P_{D}$	Package power dissipation @ TA ≤ +25°C	_	0.625	W
Rth <sub>JA</sub>	Thermal resistance, junction to ambient	_	200	°C/W
TJ	Junction temperature	_	150	_
T <sub>S</sub>	Storage temperature	-55	150	°C
TL	Lead temperature (soldering, 10 seconds)		300	7

## **Recommended Operating Conditions**

For proper operation the device should be used within the recommended conditions. The  $V_S$  offset rating is tested with all supplies biased at 15V differential.

Symbol	Definition	Min.	Max.	Units
V <sub>B</sub>	High side floating supply absolute voltage	V <sub>CC</sub> - 0.7	$V_{CLAMP}$	
Vs	Steady state high side floating supply offset voltage	††	600	V
V <sub>CC</sub>	Supply voltage	10	V <sub>CLAMP</sub>	
Icc	Supply current	+++	5	mA
T <sub>A</sub>	Ambient temperature	-40	125	°C

<sup>†</sup> This IC contains a zener clamp structure between the chip V<sub>CC</sub> and COM which has a nominal breakdown voltage of 15.6V. Please note that this supply pin should not be driven by a DC, low impedance power source greater than the V<sub>CLAMP</sub> specified in the Electrical Characteristics section.

© 2012 International Rectifier April 2, 2012 | PD#


<sup>††</sup> Care should be taken to avoid output switching conditions where the VS node flies inductively below ground by more than 5V.

<sup>†††</sup> Enough current should be supplied to the V<sub>CC</sub> pin of the IC to keep the internal 15.6V zener diode clamping the voltage at this pin.



## **Recommended Component Values**

Symbol	Component	Min.	Max.	Units
R <sub>T</sub>	Timing resistor value	10	_	kΩ
CT	C <sub>T</sub> pin capacitor value	330		pF

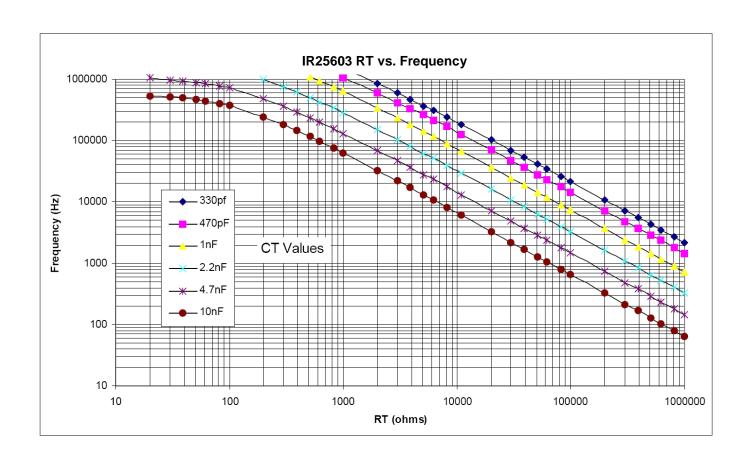

© 2012 International Rectifier April 2, 2012 | **PD#** 



### **Electrical Characteristics**

 $V_{BIAS}$  ( $V_{CC}$ ,  $V_{BS}$ ) = 12V, CL = 1000 pF, CT = 1nF and  $T_A$  = 25°C unless otherwise specified.


Symbol	Definition	Min.	Тур.	Max.	Units	Test Conditions
V <sub>CCUV+</sub>	V <sub>CC</sub> supply undervoltage positive going threshold	8.1	9.0	9.9		
V <sub>CCUV</sub> -	V <sub>CC</sub> supply undervoltage negative going threshold	7.2	8.0	8.8	V	
V <sub>CCUVH</sub>	V <sub>CC</sub> undervoltage hysteresis	0.5	1.0	1.5		
I <sub>QCCUV</sub>	Micropower startup V <sub>CC</sub> supply current	_	75	150	uA	V <sub>CC</sub> ≤ V <sub>CCUV</sub> -
IQCC	Quiescent V <sub>CC</sub> supply current	_	500	950		
$V_{CLAMP}$	V <sub>CC</sub> zener clamp voltage	14.4	15.6	16.8	V	$I_{CC} = 5mA$
Floating S	upply Characteristics					
Symbol	Definition	Min.	Тур.	Max.	Units	Test Conditions
I <sub>QBSUV</sub>	Micropower startup V <sub>BS</sub> supply current	_	0	10	μA	V <sub>CC</sub> ≤ V <sub>CCUV</sub> -
I <sub>QBS</sub>	Quiescent V <sub>BS</sub> supply current	_	30	50		
V <sub>BSMIN</sub>	Minimum required V <sub>BS</sub> voltage for proper functionality from R <sub>T</sub> to HO	_	4.0	5.0	V	$V_{CC} = V_{CCUV+} + 0.1V$
I <sub>LK</sub>	Offset supply leakage current	_	_	50	uA	$V_{B} = V_{S} = 600V$
Oscillator   Symbol	I/O Characteristics  Definition	Min.	Тур.	Max.	Units	Test Conditions
		19.4	20	20.6		$R_T = 36.9k\Omega$
fosc	Oscillator frequency	94	100	106	kHz	$R_T = 7.43k\Omega$
d	R <sub>T</sub> pin duty cycle	48	50	52	%	f <sub>O</sub> < 100kHz
I <sub>CT</sub>	C <sub>T</sub> pin current	_	0.001	1.0	uA	
I <sub>CTUV</sub>	UV-mode C <sub>T</sub> pin pulldown current	0.3	0.7	1.2	mA	$V_{CC} = 7V$
V <sub>CT+</sub>	Upper C <sub>T</sub> ramp voltage threshold		8	_		
V <sub>CT</sub> -	Lower C <sub>T</sub> ramp voltage threshold		4		V	
V <sub>CTSD</sub>	C <sub>T</sub> voltage shutdown threshold	1.8	2.1	2.4		
	Library Decree Agency V		10	50		I <sub>RT</sub> = 100 μA
$V_{RT+}$	High-level $R_T$ output voltage, $V_{CC}$ - $V_{RT}$	_	100	300		I <sub>RT</sub> = 1mA
		_	10	50		I <sub>RT</sub> = 100 μA
.,	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		400	300		$I_{RT} = 1mA$
V <sub>RT-</sub>	Low-level R <sub>T</sub> output voltage	_	100	300	m۷	iKI – iiiiV
V <sub>RT</sub> -	Low-level R <sub>T</sub> output voltage  UV-mode R <sub>T</sub> output voltage	_	0	100	mV	V <sub>CC</sub> ≤ V <sub>CCUV</sub> -
					mV	



# **Electrical Characteristics (cont.)**

Gate Driver Output Characteristics						
Symbol	Definition	Min.	Тур.	Max.	Units	Test Conditions
VOH	High level output voltage, V <sub>BIAS</sub> -V <sub>O</sub>	_	0	100		I <sub>O</sub> = 0A
VOL	Low-level output voltage, V <sub>O</sub>	_	0	100	mV	$I_O = 0A$
VOL_UV	UV-mode output voltage, V <sub>O</sub>	_	0	100	mv	$I_{O} = 0A$ $V_{CC} \le V_{CCUV}$
t <sub>r</sub>	Output rise time	_	80	150		
t <sub>f</sub>	Output fall time	_	45	100	ns	
t <sub>sd</sub>	Shutdown propagation delay	_	660	_		
t <sub>d</sub>	Output dead time (HO or LO)	0.75	1.20	1.65	μS	

## **Functional Block Diagram**

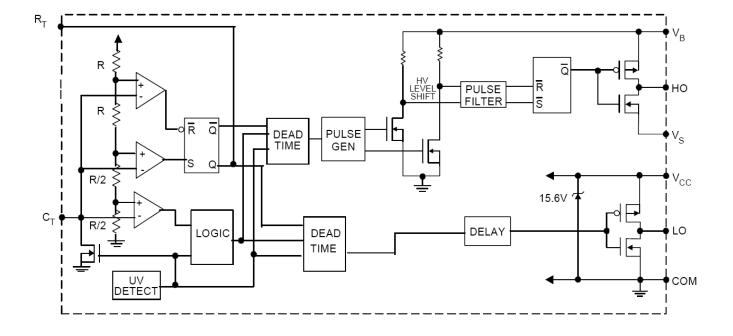


.com © 2012 International Rectifier April 13, 2012



## **Lead Definitions**

Symbol	Description
$V_{CC}$	Logic and internal gate drive supply voltage
R <sub>T</sub>	Oscillator timing resistor input
Ст	Oscillator timing capacitor input
COM	IC power and signal ground
LO	Low side gate driver output
Vs	High voltage floating supply return
НО	High side gate driver output
V <sub>B</sub>	High side gate driver floating supply

# **Lead Assignments**

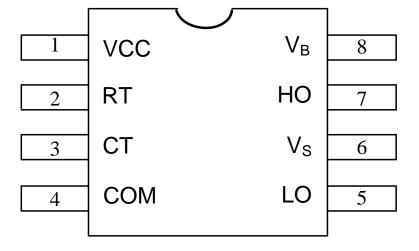

om © 2012 International Rectifier April 13, 2012



### **Advance Information**

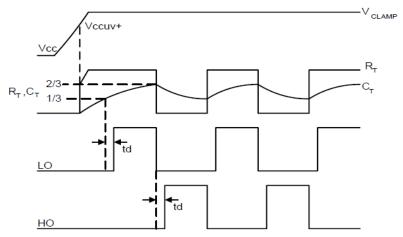


Figure 1. Input/Output Timing Diagram






Figure 2. Switching Time Waveform Definitions



**Figure 3. Deadtime Waveform Definitions** 




### **Package Details**

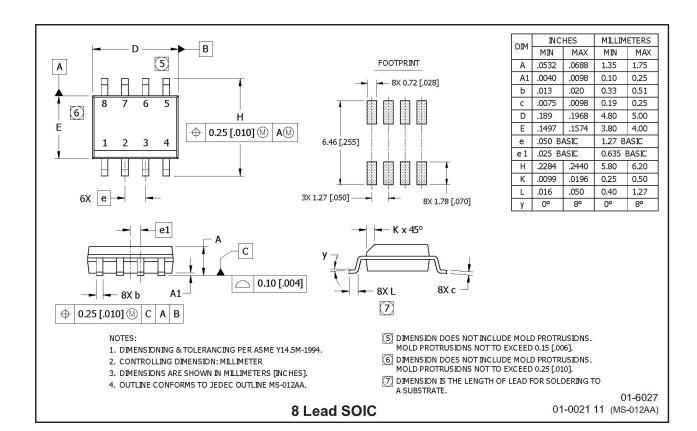




# **Tape and Reel Details**

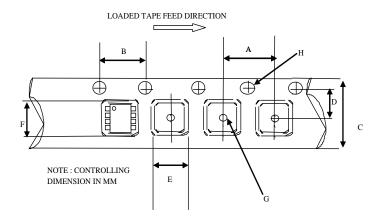

#### CARRIER TAPE DIMENSION FOR 8SOICN

	Metric		Imp	erial
Code	Min	Max	Min	Max
Α	7.90	8.10	0.311	0.318
В	3.90	4.10	0.153	0.161
С	11.70	12.30	0.46	0.484
D	5.45	5.55	0.214	0.218
E	6.30	6.50	0.248	0.255
F	5.10	5.30	0.200	0.208
G	1.50	n/a	0.059	n/a
Н	1.50	1.60	0.059	0.062

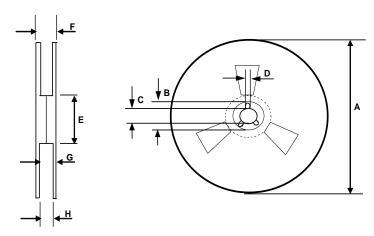


#### REEL DIMENSIONS FOR 8SOICN

	Metric		Imp	erial
Code	Min	Max	Min	Max
Α	329.60	330.25	12.976	13.001
A B C	20.95	21.45	0.824	0.844
	12.80	13.20	0.503	0.519
D	1.95	2.45	0.767	0.096
D E F	98.00	102.00	3.858	4.015
F	n/a	18.40	n/a	0.724
G	14.50	17.10	0.570	0.673
G H	12.40	14.40	0.488	0.566



## **Part Marking Information**

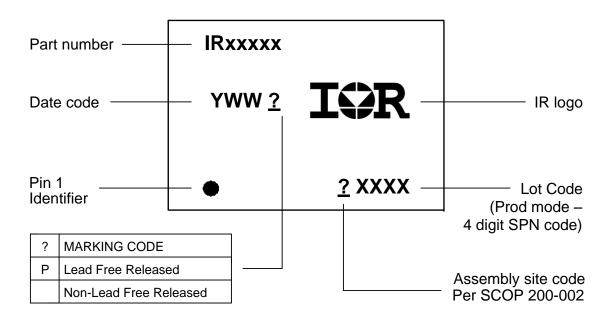



### Qualification Information<sup>†</sup>

	Industrial <sup>††</sup> (per JEDEC JESD 47E)
Qualification Level	Comments: This family of ICs has passed JEDEC's Industrial qualification. IR's Consumer qualification level is
	granted by extension of the higher Industrial level.
Moisture Sensitivity Level	MSL2 <sup>†††</sup>
Wolsture Sensitivity Level	(per IPC/JEDEC J-STD-020C)
RoHS Compliant	Yes

- Qualification standards can be found at International Rectifier's web site http://www.irf.com/
- Higher qualification ratings may be available should the user have such requirements. Please contact your International Rectifier sales representative for further information.
- ††† Higher MSL ratings may be available for the specific package types listed here. Please contact your International Rectifier sales representative for further information.

The information provided in this document is believed to be accurate and reliable. However, International Rectifier assumes no responsibility for the consequences of the use of this information. International Rectifier assumes no responsibility for any infringement of patents or of other rights of third parties which may result from the use of this information. No license is granted by implication or otherwise under any patent or patent rights of International Rectifier. The specifications mentioned in this document are subject to change without notice. This document supersedes and replaces all information previously supplied.

> For technical support, please contact IR's Technical Assistance Center http://www.irf.com/technical-info/

#### **WORLD HEADQUARTERS:**

233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105

© 2012 International Rectifier April 13, 2012