


Product description	Bayonet Female cable connector, Contacts: 4+3+PE, 7.0-17.0 mm, unshielded, crimping (Crimp contacts must be ordered separately), IP68/IP69K, UL 2238, VDE
Area	Bayonet HEC
Series	696
Part no.	99 6502 000 08


### Illustration



### Scale drawing

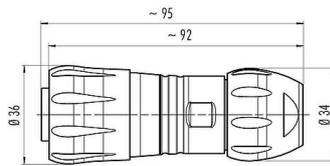

### Contact arrangement (Plug-in side)

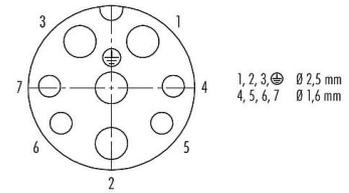

You can find the component part drawing and assembly instructions on the next page.

## Technical data

### General features

Part no.	99 6502 000 08
Connector design	Female cable connector
Version	Connector socket straight
Connector locking system	Bayonet
Termination	crimping ( <a href="#">Crimp contacts must be ordered separately</a> )
Degree of protection	IP68/IP69K
Connection cross-section	<a href="#">click here for more info</a>
Cable outlet	7.0-17.0 mm
Temperature range from/to	-40 °C / 100 °C
Mechanical operation	> 1000 Mating cycles
Weight (g)	57.88
Customs tariff number	85369010
Country of Origin	DE

### Electrical parameters

Rated voltage	Power: 400 V, Signal: 60 V
Rated impulse voltage	1000 V
Rated current	3 A Signal / 25 A Power (20 A UL; 16 A CSA)
Insulation resistance	> 10 <sup>8</sup> Ω
Pollution degree	3
Overvoltage category	III
Insulating material group	I
EMC compliance	unshielded

# Product data sheet

## Power connectors



Product description	<b>Bayonet Female cable connector, Contacts: 4+3+PE, 7.0-17.0 mm, unshielded, crimping (Crimp contacts must be ordered separately), IP68/IP69K, UL 2238, VDE</b>
Area	<b>Bayonet HEC</b>
Series	<b>696</b>
Part no.	<b>99 6502 000 08</b>

### Material

Housing material	PA
Contact body material	PA
Contact material	depending on crimp contact (accessory)
REACH SVHC	None (No pollutants)
SCIP number	SCIP-number not available

### Authorization/approvals

Approvals	UL 2238, VDE
-----------	--------------

### Classifications

eCl@ss 11.1	27-44-01-02
ETIM 9.0	EC002635

### Declarations of conformity

Low Voltage Directive	2014/35/EU (EN 60529:1991   2014/35/EU;EN 60204-1:2018)
-----------------------	---

Product description	<b>Bayonet Female cable connector, Contacts: 4+3+PE, 7.0-17.0 mm, unshielded, crimping (Crimp contacts must be ordered separately), IP68/IP69K, UL 2238, VDE</b>
Area	<b>Bayonet HEC</b>
Series	<b>696</b>
Part no.	<b>99 6502 000 08</b>

## Assembly instructions

- Strip to  $L = X$  mm length and take off cable jacket.
- Bead pressing screw, pinch ring, seal and distance sleeve to cable.
- Strip insulation of the single wires (length  $Y$  mm).
- Crimp contacts to single wires.\*
- Press crimped contacts into contact carrier until they snap into place. Then push the carrier into the connector sleeve to block.
- Put locking unit to the thread of the connector sleeve and screw it towards the direction marked with an arrow until it is tight.
- Push sealing ring into the pinch ring to block and fix both by screwing the pressing screw towards the connector sleeve. (recommended torque 2.5 Nm)

Contacts	contact-Ø	length X	length Y
8	Ø 1.6 mm	45 mm	8 mm
8	Ø 2.5 mm	45 mm	8 mm
5	Ø 3.6 mm	50 mm	12 mm

### Extracting the contacts:


As the contacts are full floating the extraction tool can be inserted with slight pendular movements to block. Afterwards press the extraction button.

### \* Crimping tool

Ordering-No.	0.14 - 4 mm <sup>2</sup>	66 0003 001
Ordering-No.	1.5 - 6 mm <sup>2</sup>	66 0005 000

### Extraction tool for contacts


Ordering-No.	Ø 1.6 mm	66 0004 001
Ordering-No.	Ø 2.5 mm	66 0011 001
Ordering-No.	Ø 3.6 mm	66 0012 001

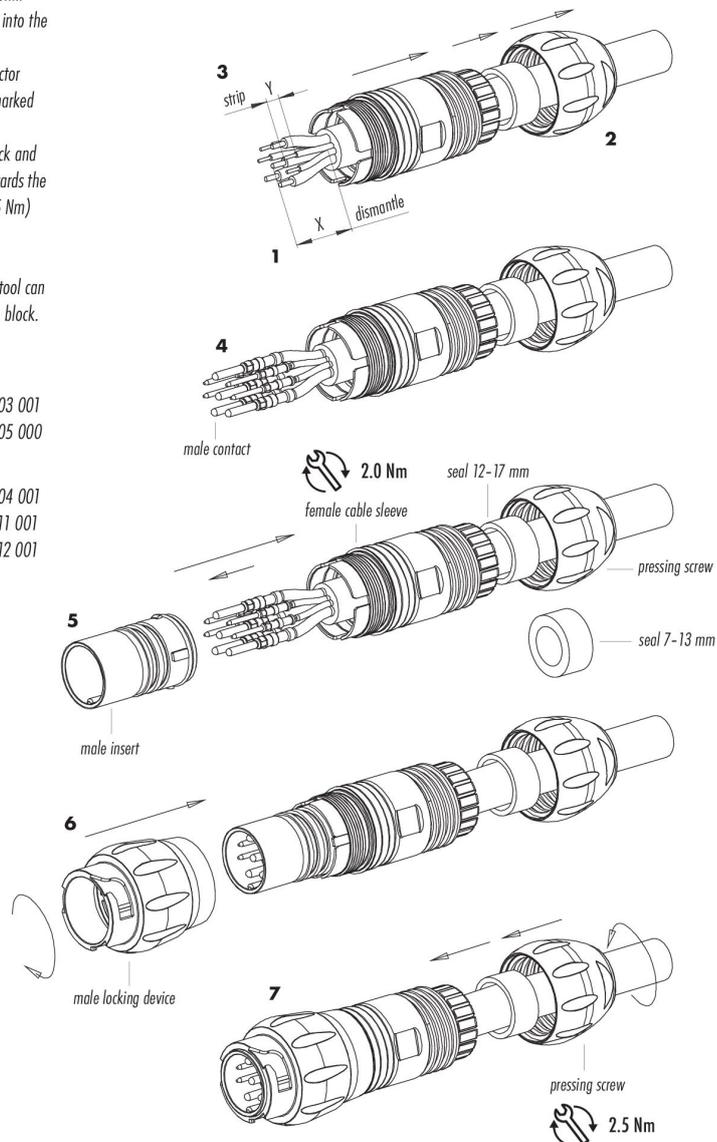

Product description **Bayonet Female cable connector, Contacts: 4+3+PE, 7.0-17.0 mm, unshielded, crimping (Crimp contacts must be ordered separately), IP68/IP69K, UL 2238, VDE**

Area **Bayonet HEC**  
Series **696**  
Part no. **99 6502 000 08**

### Component part drawing

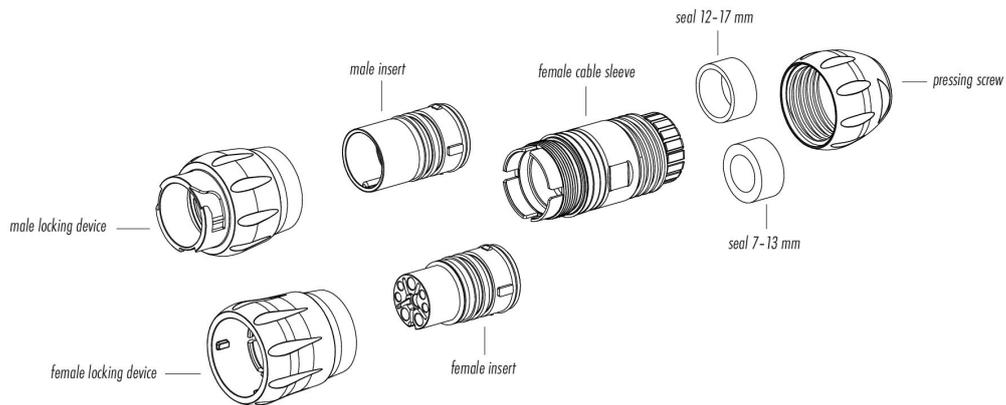

Product description	<b>Bayonet Female cable connector, Contacts: 4+3+PE, 7.0-17.0 mm, unshielded, crimping (Crimp contacts must be ordered separately), IP68/IP69K, UL 2238, VDE</b>
Area	<b>Bayonet HEC</b>
Series	<b>696</b>
Part no.	<b>99 6502 000 08</b>

## General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".