

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Primary-switched QUINT POWER supply for DIN rail mounting, with selectable output characteristic curve and SFB (Selective Fuse Breaking) Technology, protective coating and integrated decoupling MOSFET, input: 1-phase, output: 24 V DC / 40 A

Product description

The fourth generation of the high-performance QUINT POWER power supplies ensures superior system availability by means of new functions. Signaling thresholds and characteristic curves can be individually adjusted via the NFC interface. The unique SFB technology and preventive function monitoring of the QUINT POWER power supply increase the availability of your application.

Your advantages

- Integrated decoupling MOSFET maximizes system availability and operational safety
- Double overvoltage protection (OVP) switches the output off in the event of an error to reliably protect the loads against overvoltages.
- Protective coating offers protection against dust, corrosive gases, and humidity
- ATEX/IECEx approval in accordance with IEC 60079-0,-7, -11, and -15
- Wide temperature range allows use under extreme ambient conditions of -40°C to +75°C

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2904618 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | CM10 |
| Product key | CMPI13 |
| GTIN | 4055626909387 |
| Weight per piece (including packing) | 3,261 g |
| Weight per piece (excluding packing) | 3.261 g |
| Customs tariff number | 85044095 |
| Country of origin | TH |

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

Technical data

Input data

| | |
|----------------------------------|--|
| Control input (configurable) Rem | Output power ON/OFF (SLEEP MODE) |
| Default | Output power ON (>40 k Ω /24 V DC/open bridge between Rem and SGnd) |

AC operation

| | |
|--|---|
| Network type | Star network |
| Input voltage | min. 77 V DC |
| Nominal input voltage range | 100 V AC ... 240 V AC |
| Input voltage range | 100 V AC ... 240 V AC -15 % ... +10 % |
| Derating | < 100 V AC (1 %/V) |
| Electric strength, max. | 300 V AC 60 s |
| Typical national grid voltage | 120 V AC 230 V AC |
| Voltage type of supply voltage | AC |
| Inrush current | typ. 12 A (at 25 °C) |
| Inrush current integral (I^2t) | < 0.3 A ² s |
| Inrush current limitation | 12 A (after 1 ms) |
| AC frequency range | 50 Hz ... 60 Hz -10 % ... +10 % |
| Frequency range (f_N) | 50 Hz ... 60 Hz -10 % ... +10 % 16.7 Hz (acc. to EN 50163) |
| Mains buffering time | typ. 27 ms (120 V AC) typ. 27 ms (230 V AC) |
| Current consumption | 13.6 A (100 V AC) 9.9 A (120 V AC) 5.4 A (230 V AC) 5.4 A (240 V AC) |
| Nominal power consumption | 1072 VA |
| Protective circuit | Transient surge protection; Varistor, gas-filled surge arrester |
| Switch-on time | < 1 s |
| Typical response time | 300 ms (from SLEEP MODE) |
| Input fuse | 16 A (slow-blow, internal) |
| Recommended breaker for input protection | 16 A ... 20 A (Characteristic B, C, D, K or comparable) |
| Discharge current to PE | < 3.5 mA 1.7 mA (264 V AC, 60 Hz) |

DC operation

| | |
|--------------------------------|---------------------------------------|
| Nominal input voltage range | 110 V DC ... 250 V DC |
| Input voltage range | 110 V DC ... 250 V DC -18 % ... +40 % |
| Derating | < 110 V DC (1 %/V) |
| Voltage type of supply voltage | DC |
| Current consumption | 12 A (110 V DC) |

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

| | |
|--|----------------|
| | 5 A (250 V DC) |
|--|----------------|

Output data

| | |
|--|--|
| Efficiency | typ. 94.7 % (120 V AC) |
| | typ. 95.7 % (230 V AC) |
| Output characteristic | U/I Advanced |
| | Smart HICCUP |
| | FUSE MODE |
| Nominal output voltage | 24 V DC |
| Setting range of the output voltage (U_{Set}) | 24 V DC ... 28 V DC (constant capacity) |
| Nominal output current (I_N) | 40 A |
| Static Boost ($I_{Stat.Boost}$) | 45 A |
| Dynamic Boost ($I_{Dyn.Boost}$) | 60 A (5 s) |
| Selective Fuse Breaking (I_{SFB}) | 215 A (15 ms) |
| Magnetic circuit breaker tripping | A1...A40 / B2...B25 / C1...C13 / Z1...Z16 |
| Derating | > 60 °C ... 70 °C (2.5 %/K) |
| Feedback voltage resistance | ≤ 35 V DC |
| Protection against overvoltage at the output (OVP) | < 30 V DC (double protection with shut off within 20 ms) |
| Control deviation | < 0.5 % (Static load change 10 % ... 90 %) |
| | < 2 % (Dynamic load change 10 % ... 90 %, (10 Hz)) |
| | < 0.25 % (change in input voltage ±10 %) |
| Residual ripple | < 40 mV _{PP} (with nominal values) |
| Short-circuit-proof | yes |
| No-load proof | yes |
| Output power | 960 W |
| | 1080 W |
| | 1440 W |
| Maximum no-load power dissipation | < 5 W (120 V AC) |
| | < 5 W (230 V AC) |
| Power loss nominal load max. | < 55 W (120 V AC) |
| | < 44 W (230 V AC) |
| Power dissipation SLEEP MODE | < 3 W (120 V AC) |
| | < 3 W (230 V AC) |
| Crest factor | typ. 1,7 (120 V AC) |
| | typ. 1.65 (230 V AC) |
| Rise time | < 60 ms ($U_{Out} = 10 % \dots 90 %$) |
| Connection in parallel | yes, for redundancy and increased capacity |
| Connection in series | yes |
| Fuse protection (secondary side) | electronic |
| | thermal-magnetic |
| | thermal |

Signal

| | |
|--------------------|---|
| Signal ground SGnd | Reference potential for Out1, Out2, and Rem |
|--------------------|---|

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

Signal Out 1 (configurable)

| | |
|---------|--|
| Digital | 24 V DC 20 mA |
| Default | 24 V DC 20 mA 24 V DC for $U_{Out} > 0.9 \times U_{Set}$ |

Signal Out 2 (configurable)

| | |
|---------|--|
| Digital | 24 V DC 20 mA |
| Analog | 4 mA ... 20 mA $\pm 5\%$ (Load $\leq 400 \Omega$) |
| Default | 24 V DC 20 mA 24 V DC for $P_{Out} < P_N$ |

Signal relay 13/14 (configurable)

| | |
|---------|------------------------------------|
| Default | closed ($U_{out} > 0.9 U_{Set}$) |
| Digital | 24 V DC 1 A |
| | 30 V AC/DC 0.5 A |

Connection data

Input

| | |
|--|----------------------|
| Connection method | Screw connection |
| Conductor cross-section, rigid min. | 0.2 mm ² |
| Conductor cross-section, rigid max. | 6 mm ² |
| Conductor cross-section flexible min. | 0.2 mm ² |
| Conductor cross-section flexible max. | 4 mm ² |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min. | 0.25 mm ² |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max. | 4 mm ² |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, min. | 0.25 mm ² |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 4 mm ² |
| Conductor cross-section AWG min. | 24 |
| Conductor cross-section AWG max. | 10 |
| Stripping length | 8 mm |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

Output

| | |
|---|---------------------|
| Connection method | Screw connection |
| Conductor cross-section, rigid min. | 0.5 mm ² |
| Conductor cross-section, rigid max. | 16 mm ² |
| Conductor cross-section flexible min. | 0.5 mm ² |
| Conductor cross-section flexible max. | 16 mm ² |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min. | 0.5 mm ² |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max. | 16 mm ² |
| Single conductor/flexible terminal point with ferrule without plastic | 0.5 mm ² |

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

| | |
|--|--------------------|
| sleeve, min. | |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 16 mm ² |
| Conductor cross-section AWG min. | 20 |
| Conductor cross-section AWG max. | 6 |
| Stripping length | 10 mm |
| Tightening torque, min | 1.2 Nm |
| Tightening torque max | 1.5 Nm |

Signal

| | |
|--|----------------------|
| Connection method | Push-in connection |
| Conductor cross-section, rigid min. | 0.2 mm ² |
| Conductor cross-section, rigid max. | 1.5 mm ² |
| Conductor cross-section flexible min. | 0.2 mm ² |
| Conductor cross-section flexible max. | 1.5 mm ² |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min. | 0.2 mm ² |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max. | 0.75 mm ² |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, min. | 0.2 mm ² |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 1.5 mm ² |
| Conductor cross-section AWG min. | 24 |
| Conductor cross-section AWG max. | 16 |
| Stripping length | 8 mm |

Signaling

| | |
|--------------------|---|
| Types of signaling | LED |
| | Floating signal contact |
| | Active signal output Out1 (digital, configurable) |
| | Active signal output Out2 (analog, configurable) |
| | Remote contact |
| | Signal ground SGnd |

Signal output

| | |
|------------------|--|
| P _{Out} | > 100 % (LED lights up yellow, output power > 960 W) |
| | > 75 % (LED lights up green, output power > 720 W) |
| | > 50 % (LED lights up green, output power > 480 W) |
| U _{Out} | > 0.9 × U _{Set} (LED lights up green) |
| | < 0.9 × U _{Set} (LED flashes green) |

Electrical properties

| | |
|---------------------------------|------------------------|
| Number of phases | 1 |
| Insulation voltage input/output | 4 kV AC (type test) |
| | 2 kV AC (routine test) |

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

| | |
|---------------------|--|
| Switching frequency | 85.00 kHz ... 107.00 kHz (Auxiliary converter stage) |
| | 45.00 kHz ... 200.00 kHz (Main converter stage) |
| | 50.00 kHz ... 500.00 kHz (PFC stage) |

Product properties

| | |
|----------------------------|--------------------|
| Product family | QUINT POWER |
| MTBF (IEC 61709, SN 29500) | > 908000 h (25 °C) |
| | > 539000 h (40 °C) |
| | > 243000 h (60 °C) |

Insulation characteristics

| | |
|---------------------|---|
| Protection class | I |
| Degree of pollution | 2 |

Life expectancy (electrolytic capacitors)

| | |
|-----------------|----------|
| Current | 20 A |
| Temperature | 40 °C |
| Time | 360000 h |
| Additional text | 120 V AC |

Life expectancy (electrolytic capacitors)

| | |
|-----------------|----------|
| Current | 20 A |
| Temperature | 40 °C |
| Time | 455000 h |
| Additional text | 230 V AC |

Life expectancy (electrolytic capacitors)

| | |
|-----------------|----------|
| Current | 40 A |
| Temperature | 25 °C |
| Time | 389000 h |
| Additional text | 120 V AC |

Life expectancy (electrolytic capacitors)

| | |
|-----------------|----------|
| Current | 40 A |
| Temperature | 25 °C |
| Time | 460000 h |
| Additional text | 230 V AC |

Life expectancy (electrolytic capacitors)

| | |
|-----------------|----------|
| Current | 40 A |
| Temperature | 40 °C |
| Time | 137000 h |
| Additional text | 120 V AC |

Life expectancy (electrolytic capacitors)

| | |
|-------------|-------|
| Current | 40 A |
| Temperature | 40 °C |

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

| | |
|-----------------|----------|
| Time | 162000 h |
| Additional text | 230 V AC |

Dimensions

| | |
|--------|--------|
| Width | 120 mm |
| Height | 130 mm |
| Depth | 140 mm |

Installation dimensions

| | |
|----------------------------------|---------------|
| Installation distance right/left | 5 mm / 5 mm |
| Installation distance top/bottom | 50 mm / 50 mm |

Mounting

| | |
|-------------------------|---|
| Mounting type | DIN rail mounting |
| Assembly note | alignable: $P_N \geq 50\%$, 5 mm horizontally, 15 mm next to active components, 50 mm vertically alignable: $P_N < 50\%$, 0 mm horizontally, 40 mm vertically top, 20 mm vertically bottom |
| Mounting position | horizontal DIN rail NS 35, EN 60715 |
| With protective coating | yes |

Material specifications

| | |
|--|------------------------|
| Flammability rating according to UL 94 (housing / terminal blocks) | V0 |
| Housing material | Metal |
| Hood version | Stainless steel X6Cr17 |
| Side element version | Aluminum |

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -40 °C ... 75 °C (> 60 °C Derating: 2,5 %/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Maximum altitude | ≤ 5000 m (> 2000 m, observe derating) |
| Climatic class | 3K22 (in accordance with EN 60721-3-3) |
| Max. permissible relative humidity (operation) | ≤ 100 % (at 25 °C, non-condensing) |
| Shock | 11 ms, 15 g, in each space direction (according to IEC 60068-2-27) |
| Vibration (operation) | 5 Hz ... 100 Hz resonance search 0.7g, 90 min., resonance frequency 0.7g, 90 min. (in accordance with DNV GL Class A) 5 Hz ... 100 Hz resonance search 2.3g, 90 min., resonance frequency 2.3g, 90 min. (according to DNV GL Class C) mounted with UWA 130 - 2901664 |
| Temp code | T4 (-40 ... +75 °C; > 60 °C, Derating: 2,5 %/K) |

Standards and regulations

EN 50121-3-2

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

| | |
|--|--------------------------------------|
| Rail applications | EN 50121-4 |
| | EN 50121-5 |
| | EN 50163 |
| | IEC 62236-3-2 |
| | IEC 62236-4 |
| | IEC 62236-5 |
| | EN 50155 |
| | EN 45545-2 (HL3) |
| | EN 61373 (Class 1B) |
| HART FSK Physical Layer Test Specification Compliance | Output voltage U_{Out} compliant |
| Standard – Limitation of mains harmonic currents | EN 61000-3-2 |
| Standard - Electrical safety | IEC 61010-2-201 (SELV) |
| Explosive atmosphere | IEC 60079-0 |
| | IEC 60079-7 |
| | IEC 60079-11 |
| | IEC 60079-15 |
| Standard – Safety extra-low voltage | IEC 61010-1 (SELV) |
| | IEC 61010-2-201 (PELV) |
| Standard - Safe isolation | IEC 61558-2-16 |
| | IEC 61010-2-201 |
| Standard - safety for equipment for measurement, control, and laboratory use | IEC 61010-1 |
| Battery charging | DIN 41773-1 |
| Noxious gas test | ANSI/ISA 71.04-2013 G3 Harsh Group A |
| Approval - requirement of the semiconductor industry with regard to mains voltage dips | SEMI F47-0706, EN 61000-4-11 |

Overvoltage category

| | |
|---------------|----------------------|
| EN 61010-1 | II (≤ 5000 m) |
| EN 62477-1 | III (≤ 2000 m) |
| EN 61558-2-16 | II (≤ 5000 m) |

Fire protection in rail vehicles

| | |
|--------------------------|----------------------------------|
| Standard designation | Fire protection in rail vehicles |
| Standards/specifications | EN 45545-2 (HL3) |

Approvals

| | |
|-----------------------|---|
| CSA | CAN/CSA-C22.2 No. 61010-2-201 |
| | CSA-C22.2 No. 107.1-16 |
| Shipbuilding approval | DNV, BV |
| SIQ | CB-Scheme (IEC 61010-1, IEC 61010-2-201) |
| UL approvals | UL Listed UL 508 |
| | UL 121201 & CSA C22.2 No. 213-17 Class I, Division 2, Groups A, B, C, D T4 (Hazardous Location) |

Conformity/Approvals

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

| | |
|--|--------------------------------|
| ATEX | SIQ 23 ATEX 161 X |
| | Ⓜ II 3 G Ex ec ic nC IIC T4 Gc |
| INMETRO | DNV 19.0187 X |
| IECEX | IECEX SIQ 23.0001X |
| | Ex ec ic nC IIC T4 Gc |
| Functional Safety in accordance with IEC 61508 | SIL 3 applied for |

EMC data

| | |
|-------------------------------------|---|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| Low Voltage Directive | Conformance with Low Voltage Directive 2014/35/EC |
| EMC requirements for noise emission | EN 61000-6-3 |
| | EN 61000-6-4 |
| EMC requirements for noise immunity | EN 61000-6-1 |
| | EN 61000-6-2 |
| EMC requirements for power supply | IEC 61850-3 (G,H) |
| | EN 61000-6-5 (switching devices) |

Conducted noise emission

| | |
|-----------------------|------------------------|
| Standards/regulations | EN 55016 |
| | EN 61000-6-3 (Class B) |

Noise emission

| | |
|-----------------------|---|
| Standards/regulations | Additional basic standard EN 61000-6-5 (immunity in switching devices), IEC/EN 61850-3 (power supply) |
|-----------------------|---|

Noise emission

| | |
|-----------------------|------------------------|
| Standards/regulations | EN 55016 |
| | EN 61000-6-3 (Class B) |

DNV GL conducted noise emissions

| | |
|-----------------|-------------------------|
| DNV | Class A |
| Additional text | Area power distribution |

DNV GL noise radiation

| | |
|-----------------|-------------------------|
| DNV | Class A |
| Additional text | Area power distribution |

Harmonic currents

| | |
|-----------------------|------------------------|
| Standards/regulations | EN 61000-3-2 |
| | EN 61000-3-2 (Class A) |
| Frequency range | 0 kHz ... 2 kHz |

Flicker

| | |
|-----------------------|-----------------|
| Standards/regulations | EN 61000-3-3 |
| | EN 61000-3-3 |
| Frequency range | 0 kHz ... 2 kHz |

Electrostatic discharge

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

| | |
|--------------------------------|---|
| Standards/regulations | EN 61000-4-2 |
| Electrostatic discharge | |
| Contact discharge | 8 kV (Test Level 4) |
| Discharge in air | 15 kV (Test Level 4) |
| Comments | Criterion A |
| Electromagnetic HF field | |
| Standards/regulations | EN 61000-4-3 |
| Electromagnetic HF field | |
| Frequency range | 80 MHz ... 1 GHz |
| Test field strength | 20 V/m (Test Level 3) |
| Frequency range | 1 GHz ... 6 GHz |
| Test field strength | 10 V/m (Test Level 3) |
| Comments | Criterion A |
| Fast transients (burst) | |
| Standards/regulations | EN 61000-4-4 |
| Fast transients (burst) | |
| Input | 4 kV (Test Level 4 - asymmetrical) |
| Output | 4 kV (Test Level 4 - asymmetrical) |
| Signal | 4 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion A |
| Surge voltage load (surge) | |
| Standards/regulations | EN 61000-4-5 |
| Surge voltage load (surge) | |
| Input | typ. 3 kV (Test Level 4 - symmetrical) |
| | typ. 6 kV (Test Level 4 - asymmetrical) |
| Output | 1 kV (Test Level 3 - symmetrical) |
| | 2 kV (Test Level 3 - asymmetrical) |
| Signal | 4 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion A |
| Conducted interference | |
| Standards/regulations | EN 61000-4-6 |
| Conducted interference | |
| Input/output/signal | asymmetrical |
| Frequency range | 0.15 MHz ... 80 MHz |
| Comments | Criterion A |
| Voltage | 10 V (Test Level 3) |
| Power frequency magnetic field | |
| Standards/regulations | EN 61000-4-8 |

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

| | |
|---------------------|-----------------|
| Frequency | 16.7 Hz |
| | 50 Hz |
| | 60 Hz |
| Test field strength | 100 A/m |
| Additional text | 60 s |
| Comments | Criterion A |
| Frequency | 50 Hz |
| | 60 Hz |
| Frequency range | 50 Hz ... 60 Hz |
| Test field strength | 1 kA/m |
| Additional text | 3 s |
| Frequency | 0 Hz |
| Test field strength | 300 A/m |
| Additional text | DC, 60 s |

Voltage dips

| | |
|-----------------------|--|
| Standards/regulations | EN 61000-4-11 |
| Voltage | 230 V AC |
| Frequency | 50 Hz |
| Voltage dip | 70 % |
| Number of periods | 0.5 / 1 / 25 / 30 periods |
| Additional text | Test Level 2 |
| Comments | Criterion A: 0.5 / 1 / 25 / 30 periods |
| Voltage dip | 40 % |
| Number of periods | 5 / 10 / 50 periods |
| Additional text | Test Level 2 |
| Comments | Criterion A |
| Voltage dip | 0 % |
| Number of periods | 0,5 / 1 / 5 / 50 / 250 periods |
| Additional text | Test Level 2 |
| Comments | Criterion A: 0.5 / 1 period Criterion B: 5 / 50 / 250 periods |

Pulse-shape magnetic field

| | |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-9 |
| Test field strength | 1000 A/m |
| Comments | Criterion A |

Attenuated sinusoidal oscillations (ring wave)

| | |
|-----------------------|------------------------------------|
| Standards/regulations | EN 61000-4-12 |
| Input | 2 kV (Test Level 4 - symmetrical) |
| | 4 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion A |

Asymmetrical conducted disturbance variables

| | |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-16 |
|-----------------------|---------------|

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

| | |
|--------------|------------------------------------|
| Test level 1 | 15 Hz 150 Hz (Test Level 4) |
| Voltage | 30 V 3 V |
| Test level 2 | 150 Hz 1.5 kHz (Test Level 4) |
| Voltage | 3 V |
| Test level 3 | 1.5 kHz 15 kHz (Test Level 4) |
| Voltage | 3 V 30 V |
| Test level 4 | 15 kHz 150 kHz (Test Level 4) |
| Voltage | 30 V |
| Test level 5 | 16.7 Hz 50 Hz 60 Hz (Test Level 4) |
| Voltage | 30 V (10 s) |
| Test level 6 | 150 Hz 180 Hz (Test Level 4) |
| Voltage | 30 V (10 s) |
| Test level 7 | 16.7 Hz 50 Hz 60 Hz (Test Level 4) |
| Voltage | 300 V (3 s) |
| Comments | Criterion A |

Attenuated oscillating wave

| | |
|------------------------------|---|
| Standards/regulations | EN 61000-4-18 |
| Input, output (test level 1) | 100 kHz 1 MHz (Test Level 3 - symmetrical) |
| Voltage | 1 kV |
| Input, output (test level 2) | 10 MHz (Test Level 3 - asymmetrical) |
| Voltage | 2 kV |
| Input, output (test level 3) | 100 kHz 1 MHz (Test Level 3 - asymmetrical) |
| Voltage | 2.5 kV |
| Signals (test level 1) | 100 kHz 1 MHz (Test Level 3 - symmetrical) |
| Voltage | 1 kV |
| Signals (test level 2) | 100 kHz 1 MHz (Test Level 3 - asymmetrical) |
| Voltage | 2.5 kV |
| Comments | Criterion A |

Attenuated oscillating magnetic field

| | |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-10 |
| Test field strength | 100 A/m |
| Test level 1 | 100 kHz |
| Test field strength | 100 A/m |
| Test level 2 | 1 MHz |
| Comments | Criterion A |

Criteria

| | |
|-------------|--|
| Criterion A | Normal operating behavior within the specified limits. |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |
| Criterion C | Temporary adverse effects on the operating behavior, which the device corrects automatically or which can be restored by actuating the operating elements. |


Drawings

Schematic diagram


Housing




Diagram

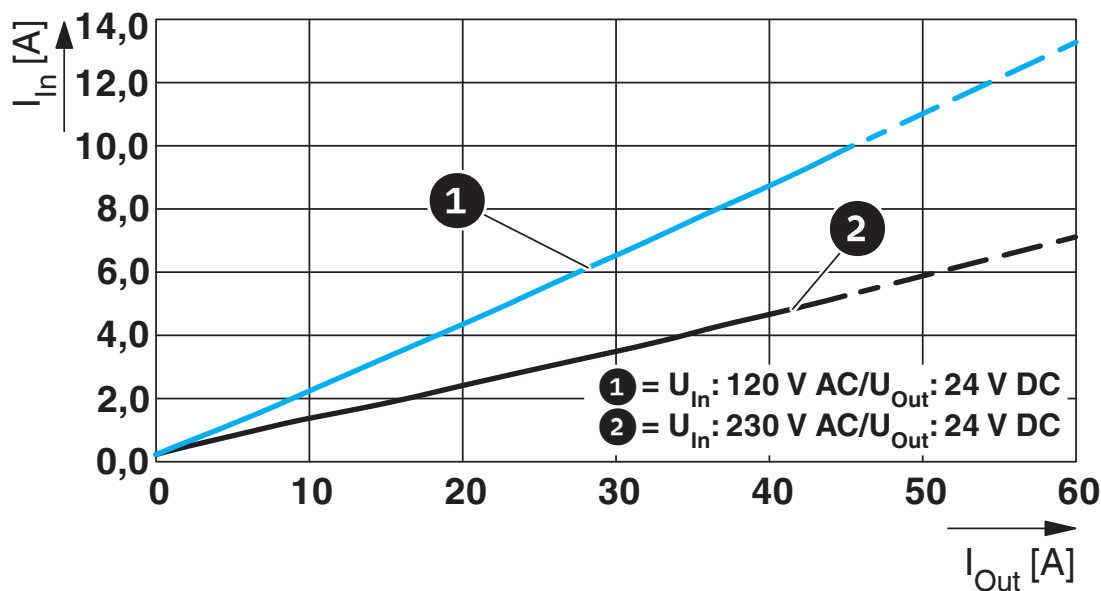

Diagram

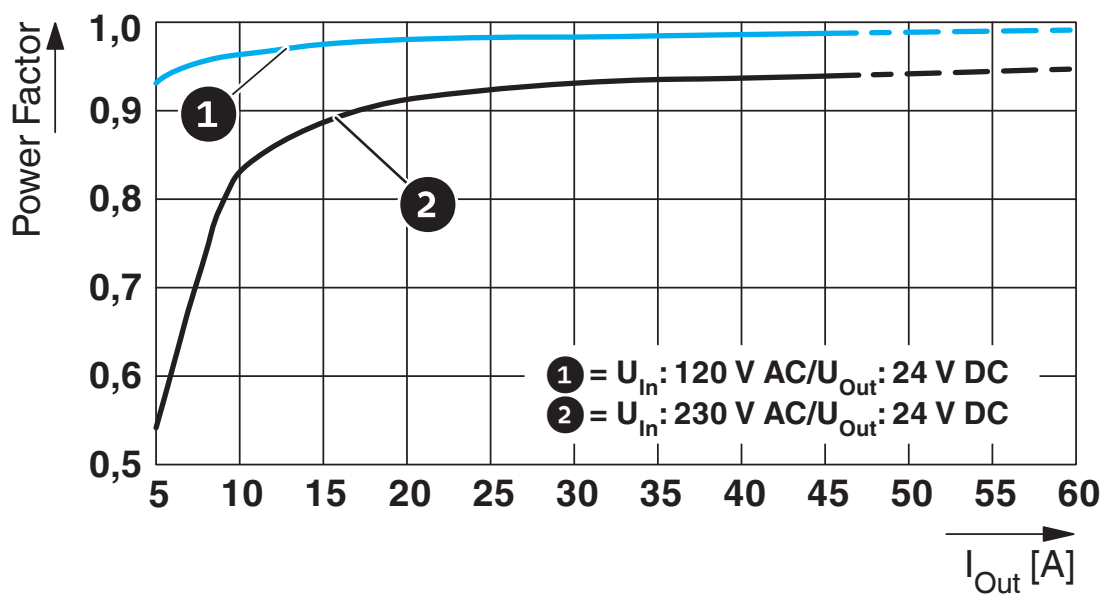

Diagram

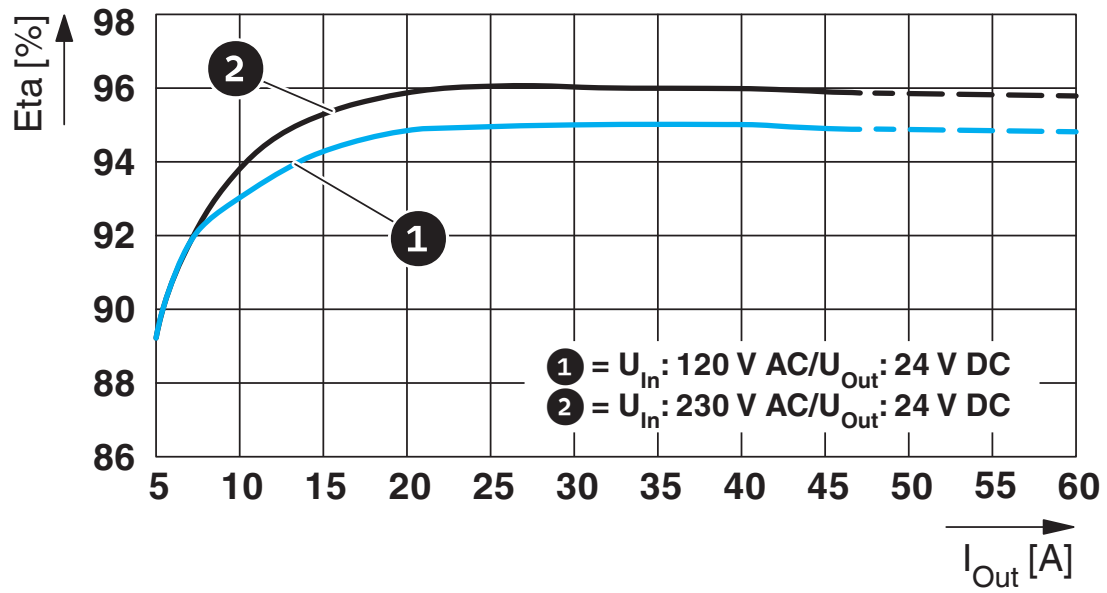

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2904618>



IECEE CB Scheme

Approval ID: SI-10371



cULus Listed

Approval ID: E123528-20230713

DNV

Approval ID: TAA00000BV



BV

Approval ID: 44621/B0 BV



Type approved

Approval ID: SI-SIQ BG 005/111

SEMI F47

Approval ID: SEMI F47

CoC / Compliance Statement

Approval ID: 24PP124-01_0



IECEx

Approval ID: IECEx SIQ 23.0001X



ATEX

Approval ID: SIQ 23 ATEX 161 X



UKCA-EX

Approval ID: 23UKEX1677X



CCC

Approval ID: 2023322303005406

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>



NEPSI-EX

Approval ID: GYJ23.1281X

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27040701 |
| ECLASS-15.0 | 27040701 |

ETIM

| | |
|-----------|----------|
| ETIM 10.0 | EC002540 |
|-----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c), 7(a), 7(c)-I |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-25 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | f4056b4b-5ea3-42a9-978c-864fcec62c5c |

QUINT4-PS/1AC/24DC/40/+ - Power supply



2904618

<https://www.phoenixcontact.com/us/products/2904618>

Accessories

UWA 182/52 - Mounting adapter

2938235

<https://www.phoenixcontact.com/us/products/2938235>



Universal wall adapter for securely mounting the device in the event of strong vibrations. The device is screwed directly onto the mounting surface. The universal wall adapter is attached on the top/bottom.

UWA 130 - Mounting adapter

2901664

<https://www.phoenixcontact.com/us/products/2901664>



2-piece universal wall adapter for securely mounting the device in the event of strong vibrations. The profiles that are screwed onto the side of the device are screwed directly onto the mounting surface. The universal wall adapter is attached on the left/right.

QUINT4-PS/1AC/24DC/40/+ - Power supply

2904618

<https://www.phoenixcontact.com/us/products/2904618>



TWN4 MIFARE NFC USB ADAPTER - Programming adapter

2909681

<https://www.phoenixcontact.com/us/products/2909681>



Near Field Communication (NFC) programming adapter with USB interface for the wireless configuration of NFC-capable products from Phoenix Contact with software. A separate USB driver is not required.

PLT-SEC-T3-230-FM - Type 3 surge protection device

2905229

<https://www.phoenixcontact.com/us/products/2905229>



Pluggable device protection, according to type 3/class III, for 1-phase power supply networks with separate N and PE (3-conductor system: L1, N, PE), with integrated surge-proof fuse and remote indication contact. Also suitable for DC applications.

QUINT4-PS/1AC/24DC/40/+ - Power supply

2904618

<https://www.phoenixcontact.com/us/products/2904618>



CBMC E4 24DC/1-4A NO - Electronic circuit breaker

2906031

<https://www.phoenixcontact.com/us/products/2906031>



Multi-channel electronic circuit breaker for protecting four loads at 24 V DC in the event of overload and short circuit. With electronic locking of the set nominal currents. For installation on DIN rails.

CBMC E4 24DC/1-10A NO - Electronic circuit breaker

2906032

<https://www.phoenixcontact.com/us/products/2906032>



Multi-channel electronic circuit breaker for protecting four loads at 24 V DC in the event of overload and short circuit. With electronic locking of the set nominal currents. For installation on DIN rails.

QUINT4-PS/1AC/24DC/40/+ - Power supply

2904618

<https://www.phoenixcontact.com/us/products/2904618>



CBMC E4 24DC/1-4A+ IOL - Electronic circuit breaker

2910410

<https://www.phoenixcontact.com/us/products/2910410>



Multi-channel electronic circuit breaker with IO-Link interface for protecting four loads at 24 V DC in the event of overload and short circuit. With electronic locking of the set nominal currents. For installation on DIN rails.

CBMC E4 24DC/1-10A IOL - Electronic circuit breaker

2910411

<https://www.phoenixcontact.com/us/products/2910411>



Multi-channel electronic circuit breaker with IO-Link interface for protecting four loads at 24 V DC in the event of overload and short circuit. With electronic locking of the set nominal currents. For installation on DIN rails.

QUINT4-PS/1AC/24DC/40/+ - Power supply

2904618

<https://www.phoenixcontact.com/us/products/2904618>



CBM E4 24DC/0.5-10A NO-R - Electronic circuit breaker

2905743

<https://www.phoenixcontact.com/us/products/2905743>



Multi-channel, electronic circuit breaker with active current limitation for protecting four loads at 24 V DC in the event of overload and short circuit. With nominal current assistant and electronic locking of the set nominal currents. For installation on DIN rails.

CBM E8 24DC/0.5-10A NO-R - Electronic circuit breaker

2905744

<https://www.phoenixcontact.com/us/products/2905744>



Multi-channel, electronic circuit breaker with active current limitation for protecting eight loads at 24 V DC in the event of overload and short circuit. With nominal current assistant and electronic locking of the set nominal currents. For installation on DIN rails.

Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com