

2 GANG SOCKET INSTRUCTION MANUAL



SAFETY

This product must be installed in accordance with local building regulations and the latest edition of the IET wiring regulations (BS 7671). If in any doubt, consult a qualified electrician.

Before starting any electrical work or maintenance, ensure that the mains is isolated.

Do not exceed the total load rating of this device, shown on the rear of the product.

Note the IP (Ingress Protection) of this product when deciding the location of installation.

The product is intended for indoor use only.

ADVICE

These products comprise of a main unit with integral gasket, and a faceplate as a separate item.

Fix the unit to the back box using the two supplied screws, and then clip the faceplate onto the main assembly.

- a. To remove the faceplate, use a flat head screwdriver in the notch and lever off.

Clean with a soft, dry cloth. Do not use aggressive cleaning products or solvents that could damage the product and invalidate the warranty.

There is a section cover for the repair, replacement, or upgrade of USB electronics in future. Do not open this cover during installation, leave screwed in place.

WIRING INSTRUCTIONS

1. Power off. Before starting any work, ensure that the power is isolated at the consumer unit/fuse box.
2. Ensure that the wall surface is reasonably flat and smooth.
3. Connect the socket as per the diagram.

- a. Start by using the safety slider latch to remove the terminal cassette from the body of the socket.
- b. Connect each wire to the matching terminal. L – LIVE – Brown. N – NEUTRAL – Blue. EARTH – Green and Yellow.

- c. All earth connections must be made and maintained. Use green/yellow sleeving on conductors that are not insulated.


- d. Ensure that no bare wires are visible after entering the terminals.

- e. Tighten the terminal screws securely, but take care not to over tighten and damage the cables.


- f. Line up the terminal cassette to the body of the socket and slide into place, until an audible click is heard and felt, and that the safety slider is locked into place.

4. Fit the unit into a suitable wall box, taking care that no wires are trapped.

5. Once installation is complete, replace the fuse/reset the MCB, switch the power on at the consumer unit and test.

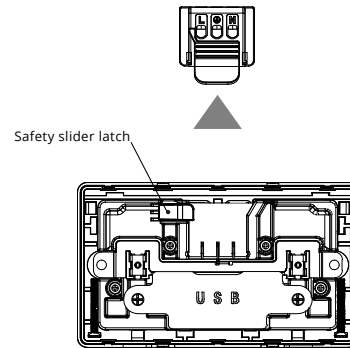

uk.rs-online.com

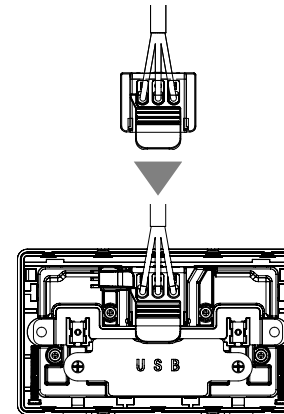

uk.rs-online.com