SIEMENS

button, 1 NO/1 NC 20 A 1 key red, Lamp 230 V

Model	
product brand name	SENTRON
product designation	Pushbutton
design of the product	1 NO contact/1 NC contact
type of light source	LED
socket design for light source	others
mechanical service life (operating cycles) typical	25 000
type of voltage of the operating voltage	AC
surge voltage resistance rated value	4 kV
Supply voltage	
operating voltage rated value	400 V
Protection class	
protection class IP	IP20
making capacity current	60 A
current breaking capacity	60 A
Dissipation	
power loss [W]	
● for rated value of the current at AC in hot operating state per pole	0.6 W
● maximum	0.6 W
Appearance	
color	
● of the button	red
Product details	
product component signal lamp	Yes
number of NC contacts	1
number of NO contacts	1
number of CO contacts	0
Display and operation	
number of keys	1
connectable conductor cross-section for flexible conductor with core end processing	
● minimum	1 mm²
● maximum	6 mm²
connectable conductor cross-section for rigid conductor	
● minimum	1 mm²
● maximum	6 mm²
tightening torque with screw-type terminals	
● minimum	0.8 N·m
● maximum	1 N·m

11/15/2023

Mechanical Design

height	90 mm
depth	70 mm
installation depth	70 mm
number of modular width units	1
net weight	83 g
ambient temperature during operation	
● minimum	-5 °C
● maximum	40 °C

Approvals Certificates

General Product Approval				Declaration of Conformity	
CCC	Confirmation	VDE	EAC	CE EG-Konf.	UKCA

Test Certificates	other		Environment	
Miscellaneous	Confirmation	Miscellaneous	Environmental Confirmations	

Further information

Siemens has decided to exit the Russian market (see here).
https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business
Siemens is working on the renewal of the current EAC certificates.
Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).
Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TE4820
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/5TE4820
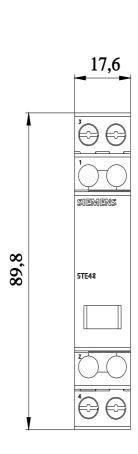**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
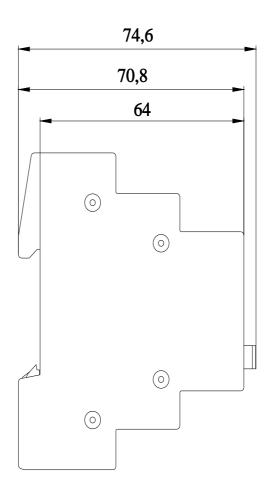http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TE4820
CAx-Online-Generator
http://www.siemens.com/cax
Tender specifications
http://www.siemens.com/specifications

17,6

74,6

70,8

64

89,8

SIEMENS

5TE48

last modified:

4/4/2022

11/15/2023