San Ace 92 9HV type

High Static Pressure Fan

Features

High Static Pressure and High Airflow

This fan delivers a maximum static pressure of 280 Pa, and a maximum airflow of $3.35 \text{ m}^3/\text{min.}^*$

Compared with the current model,** the maximum static pressure has increased by 2.7 times and maximum airflow has increased by 1.5 times.

High Energy Efficiency and Low Noise

The PWM control function enables the control of fan speed, contributing to lowering noise and improving energy efficiency of devices.

- * For model no.: 9HV0912P4G001, 9HV0924P4G001
- ** Current model: San Ace 92 9GA type 92 × 92 × 25 mm DC Fan (model no.: 9GA0912P4J03, 9GA0924P4J03).



Image depicts product without ribs.

92×92×25 mm

Specifications

The models listed below have ribs and pulse sensors with PWM control function. For models without ribs, append "1" to the end of model numbers.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]		airflow] [CFM]	Max. stat	ic pressure [inchH ₂ O]	SPL [dB(A)]	Operating temperature [°C]	Expected life [h]
9HV0912P4G001	- 12	10.2 to 13.8	100	1.23	14.76	7350	3.35	118	280	1.12	56	20 to +70	40000/60°C (70000/40°C)
			20	0.12	1.44	2200	1.0	35.3	25	0.1	26		
9HV0912P4H001			100	0.71	8.52	6050	2.75	97.1	190	0.76	52		
			20	0.07	0.84	1700	0.77	27.2	15	0.06	20		
9HV0924P4G001	- 24	20.4 to 27.6	100	0.61	14.64	7350	3.35	118	280	1.12	56		
			20	0.06	1.44	2200	1.0	35.3	25	0.1	26		
9HV0924P4H001			100	0.38	9.12	6050	2.75	97.1	190	0.76	52		
			20	0.05	1.2	1700	0.77	27.2	15	0.06	20		

^{*} PWM frequency: 25 kHz. Fan does not rotate when PWM duty cycle is 0%.


Models with the following sensor specifications are also available as options: Without sensor Lock sensor


Common	Sp	ecific	cations

. 94V-1)
d voltage)
l frame)


Airflow - Static Pressure Characteristics


· PWM duty cycle

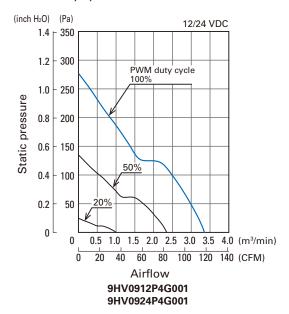

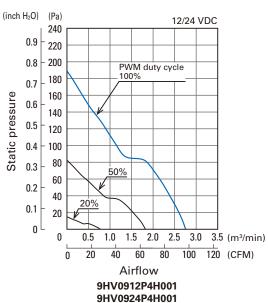



· Operating voltage range

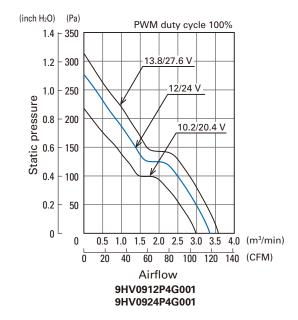

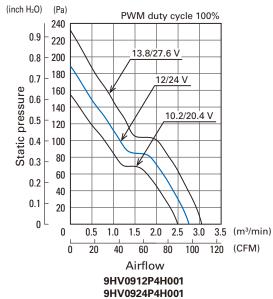


PWM Duty - Speed Characteristics Example

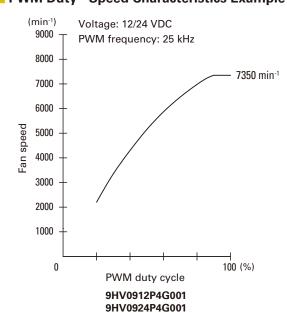

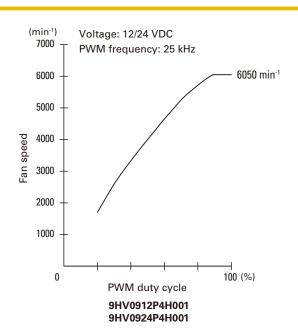

PWM Input Signal Example

Input signal waveform




 $V_{IH} = 4.75$ to 5.25 V $V_{IL} = 0$ to 0.4 V PWM duty cycle (%) = $\frac{T_1}{T} \times 100$ PWM frequency 25 (kHz) = $\frac{1}{T}$ Current source (Isource) = 1 mA max. (when control voltage is 0 V)

Current sink (Isink) = 1 mA max. (when control voltage is 5.25 V) Control terminal voltage = 5.25 V max. (when control terminal is open)

When the control terminal is open,


fan speed is the same as when PWM duty cycle is 100%. Either TTL input, open collector or open drain can be used for PWM control input signal.

Example of Connection Schematic

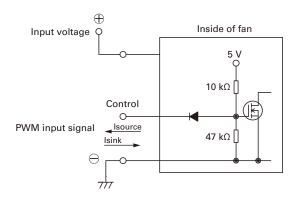

Specifications for Pulse Sensors

Output circuit: Open collector

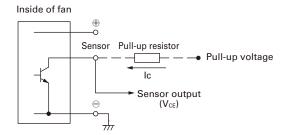

Rated voltage 12 V fan

 $V_{CE} = +13.8 \text{ V max}.$

 $Ic = 5 \text{ mA max.} [V_{OL} = V_{CE} (SAT) = 0.6 \text{ V max.}]$


Rated voltage 24 V fan

 $V_{CE} = +27.6 \text{ V max}.$


 $Ic = 5 \text{ mA max.} [V_{OL} = V_{CE} (SAT) = 0.6 \text{ V max.}]$

Output waveform (Need pull-up resistor)


In case of steady running

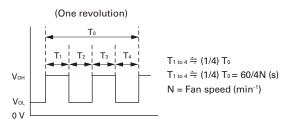

Dimensions (unit: mm)

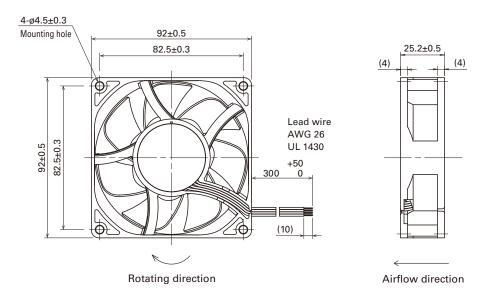

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

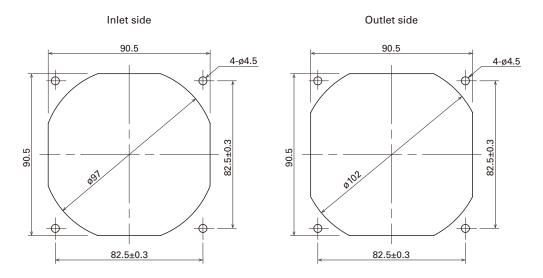

Notice

- Please read the "Safety Precautions" on our website before using the product.
 The products shown in this catalog are subject to Japanese Export Control Law. Diversion contrary to the law of exporting country is prohibited.
- For protecting fan bearings against electrolytic corrosion near strong electromagnetic noise sources, we provide effective countermeasures such as Electrolytic Corrosion Proof Fans and EMC guards. Contact us for details.

SANYO DENKI CO., LTD. 3-33-1 Minami-Otsuka, Toshima-ku, Tokyo 170-8451, Japan TEL: +81 3 5927 1020

https://www.sanyodenki.com