

West 4200

1/4 DIN Controller With Fuzzy Logic



The 4200 PID controller's fuzzy logic algorithm works in the background to reduce overshoot and improve settling times on start-up, setpoint changes and load disturbances.

- Heat/Cool operation
- Two process alarms
- Loop alarm
- RS485 comms
- Ramping setpoint
- Auto-tuning & fuzzy logic
- Remote setpoint input
- PC configuration



Technical Data

Features

Control Types

Auto/Manual

Output Configuration

Alarm 1 & 2 Types

Human Interface

PC Configuration

Input

Thermocouple

RTD

DC Linear

Impedance

Accuracy

Sampling

Sensor Break Detection

Outputs & Options

Control & Alarm Relays

Control SSR Outputs

Solid State (Triac)

Outputs

Control DC Outputs

Retransmit Outputs

Communications

Dual Setpoint Selection

Remote Setpoint Input

Operating & Environmental

Temperature & RH

Power Supply

Front Panel Protection

Approvals and

Certification

PID with fuzzy logic. Pre-tune, Self-tune, Manual Tuning, or On-Off control. Heat only or heat/cool

Selectable from front panel, with bumpless transfer

Up to 3 total. Max 2 for control (Heat & Cool), max 2 for Alarms, max 1 for retransmit Process value or Setpoint

Process high, process low, SP deviation, band, logical OR and hysteresis. Also 1 loop alarm

4 button operation, dual 4 digit 13mm & 10mm high LED displays, plus 3 LED indicators

Off-line configuration from serial port to dedicated config socket (comms option not required)

J, K, R, S, T, B, L, & N.

3 Wire PT100, 50Ω per lead maximum (balanced)

0-20/4-20mA, 0-50/10-50mV, 0-5/1-5/0-10/2-10V. Scaleable -1999 to 9999, dec point available

>100MΩ for Thermocouple and mV ranges, 47KΩ for V ranges and 4.7Ω for mA ranges

+/- 0.25% of input span +/- 1 LSD (T/C CJC better than 0.7°C)

4 per second, 14 bit resolution approximately

<2 secs (except zero based DC ranges), control O/P's turn off, high alarms activate for T/C and mV ranges, low alarms activate for RTD, mA or V ranges

Contacts SPDT 2Amp resistive at 240V AC, >500,000 operations

Drive capability >4.3V DC in 250Ω (10V 500Ω version available)

0.01 to 1 Amp AC 20 to 280V, 47 to 63Hz

0-20/4-20mA into 500Ω max, 0-10/0-5V into 500Ω min. Accuracy typically +/- 0.5%

0-20/4-20mA into 500Ω max, 0-10/0-5V into 500Ω min. Accuracy typically +/- 0.25%

2 Wire RS485, 1200 to 9600 Baud, West ASCII

Selects between 2 SP's using volt free or TTL input (SP1 = -0.6 to 0.8V, SP2 = 2 to 24V)

0-20/4-20mA, 0-50/0-100mV, 0-5/0-10V or Potentiometer (2KΩ min), scaleable, with external volt free or TTL remote/local setpoint selection input


0 to 55°C (-20 to 80°C storage), 20% to 95%RH non-condensing

90 to 264V 50/60Hz (optional 20 to 55V AC/22 to 65V DC), approx 4 Watts


IEC IP66 (Behind panel protection is IP20)

CE, UL & ULc


Dimensions

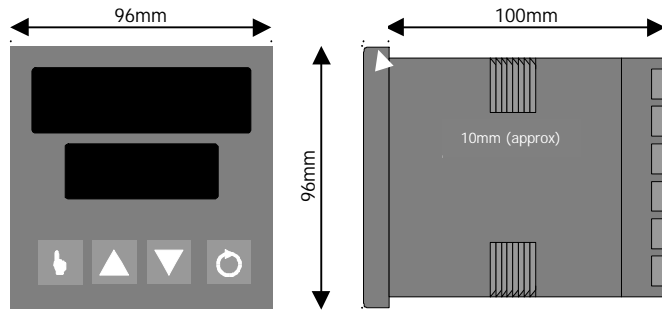

Panel Cut-out

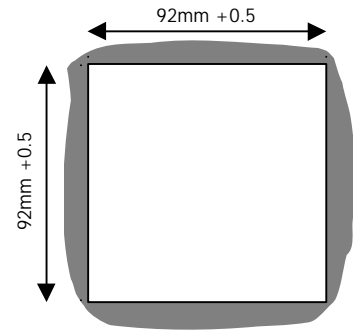

Connection Details

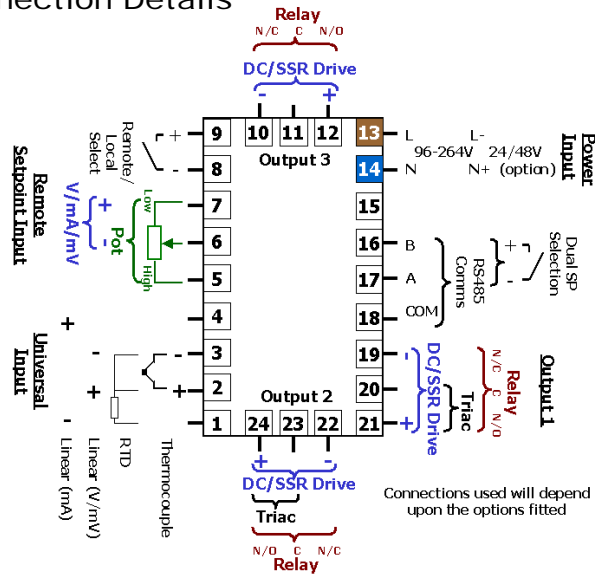

Field Reconfiguration

Input

Configurable to any type, no extra parts required

Output 1

Type is fixed as ordered. Either Relay/SSR (selectable), Triac or DC Linear (selectable for mV, mA, Volts)

Output 2

Configurable as Cool O/P or Alarm via plug-in Relay, SSR, Triac or DC Linear modules

Output 3

Configurable as Alarm via plug-in Relay or SSR modules, or retransmit using DC Linear module

Option Slot

Configurable as RS485 comms or dual setpoint selection, via plug-in modules

Secondary Input

If fitted, can be configured to any input range. Cannot be retro-fitted.

Order Code

N4200 - X - X - X - X - XX - X

Input type

3 Wire RTD or DC mV	1
Thermocouple	2
DC mA	3
DC Voltage	4

Output 1

Relay Control	1
DC for SSR Control	2
DC 0-10V Control	3
DC 0-20mA Control	4
DC 0-5V SP Control	5
DC 4-20mA Control	7

Output 2

Not fitted	0
Relay Control or Alarm 2	1
DC for SSR Control or Alarm 2	2
DC 0-10V Control	3
DC 0-20mA Control	4
DC 0-5V Control	5
DC 4-20mA Control	7
Triac Control	8

Secondary Input

0	Remote Setpoint not required
1	0-50/0-100mV Remote Setpoint Input
3	0-20/4-20mA Remote Setpoint Input
4	0-5/0-10V Remote Setpoint Input
9	Potentiometer Remote Setpoint Input
8	*Dual Setpoint

Options and Power Supply

00	No Options/90-264V AC line supply
02	No Options/24-48V AC or DC line supply
10	*RS485 Comms/90-264V AC line supply
12	*RS485 Comms/24-48V AC or DC supply
30	*Dual Setpoint/90-264V AC line supply
32	*Dual Setpoint/24-48V AC or DC supply

Output 3

0	Not fitted
1	Relay Alarm 1 output
2	DC for SSR Alarm 1 output
3	DC 0-10V Re-Transmit PV or SP
4	DC 0-20mA Re-Transmit PV or SP
5	DC 0-5V Re-Transmit PV or SP
7	DC 4-20mA Re-Transmit PV or SP

*If both dual setpoint selection and comms are required, select Options code 10 or 12 and Secondary Input code 8

In accordance with our policy of continuous improvement, we reserve the right to change specifications from those shown in this document.

West Instruments Ltd

The Hyde Business Park
Brighton, BN2 4JU
East Sussex
England

Tel: +44 (0)1273 606271
Fax: +44 (0)1273 609990
e-mail: info@west-inst.co.uk
www.west-inst.co.uk

WEST
INSTRUMENTS