




NOTE 1 LEAD CO-PLANARITY IS 0.1mm MAX.
① ② CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B)
WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.
③ MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)
④ IT SHOWS CONNECTOR'S CENTRE OF GRAVITY AND VACUUM PICKUP AREA.
⑤ THIS IS PACKAGED IN TRAY. (40pcs/TRAY)
6 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN' T AFFECT QUALITY LEVEL.
7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCES.

3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm	6	POLYSTYRENE	
		LEAD AREA:GOLD 0.03µm	5	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm
		UNDER PLATING:NICKEL 1.3µm ①			LEAD AREA:TIN-PLATING 1µm
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm	4	PHOSPHOR BRONZE	UNDER PLATING:NICKEL 1.3µm ①
		LEAD AREA:GOLD 0.03µm			CONTACT AREA:GOLD 0.1µm
		UNDER PLATING:NICKEL 1.3µm ①			LEAD AREA:TIN-PLATING 1µm
1	POLYAMIDE	BLACK UL94V-0			UNDER PLATING:NICKEL 1.3µm ①
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm	① ②	SCALE 2 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-F-005578	DESIGNED TH. SANO
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	09. 04. 24	DRAWING NO. EDC3-159078-00	
		CHECED : HS. OZAWA	09. 04. 24	PART NO. FX18-120P-0.8SH	
		DESIGNED : KI. HIROKAWA	09. 04. 24	CODE NO. CL579-0006-6-00	
		DRAWN : KI. HIROKAWA	09. 04. 24		
					DATE 11. 07. 21

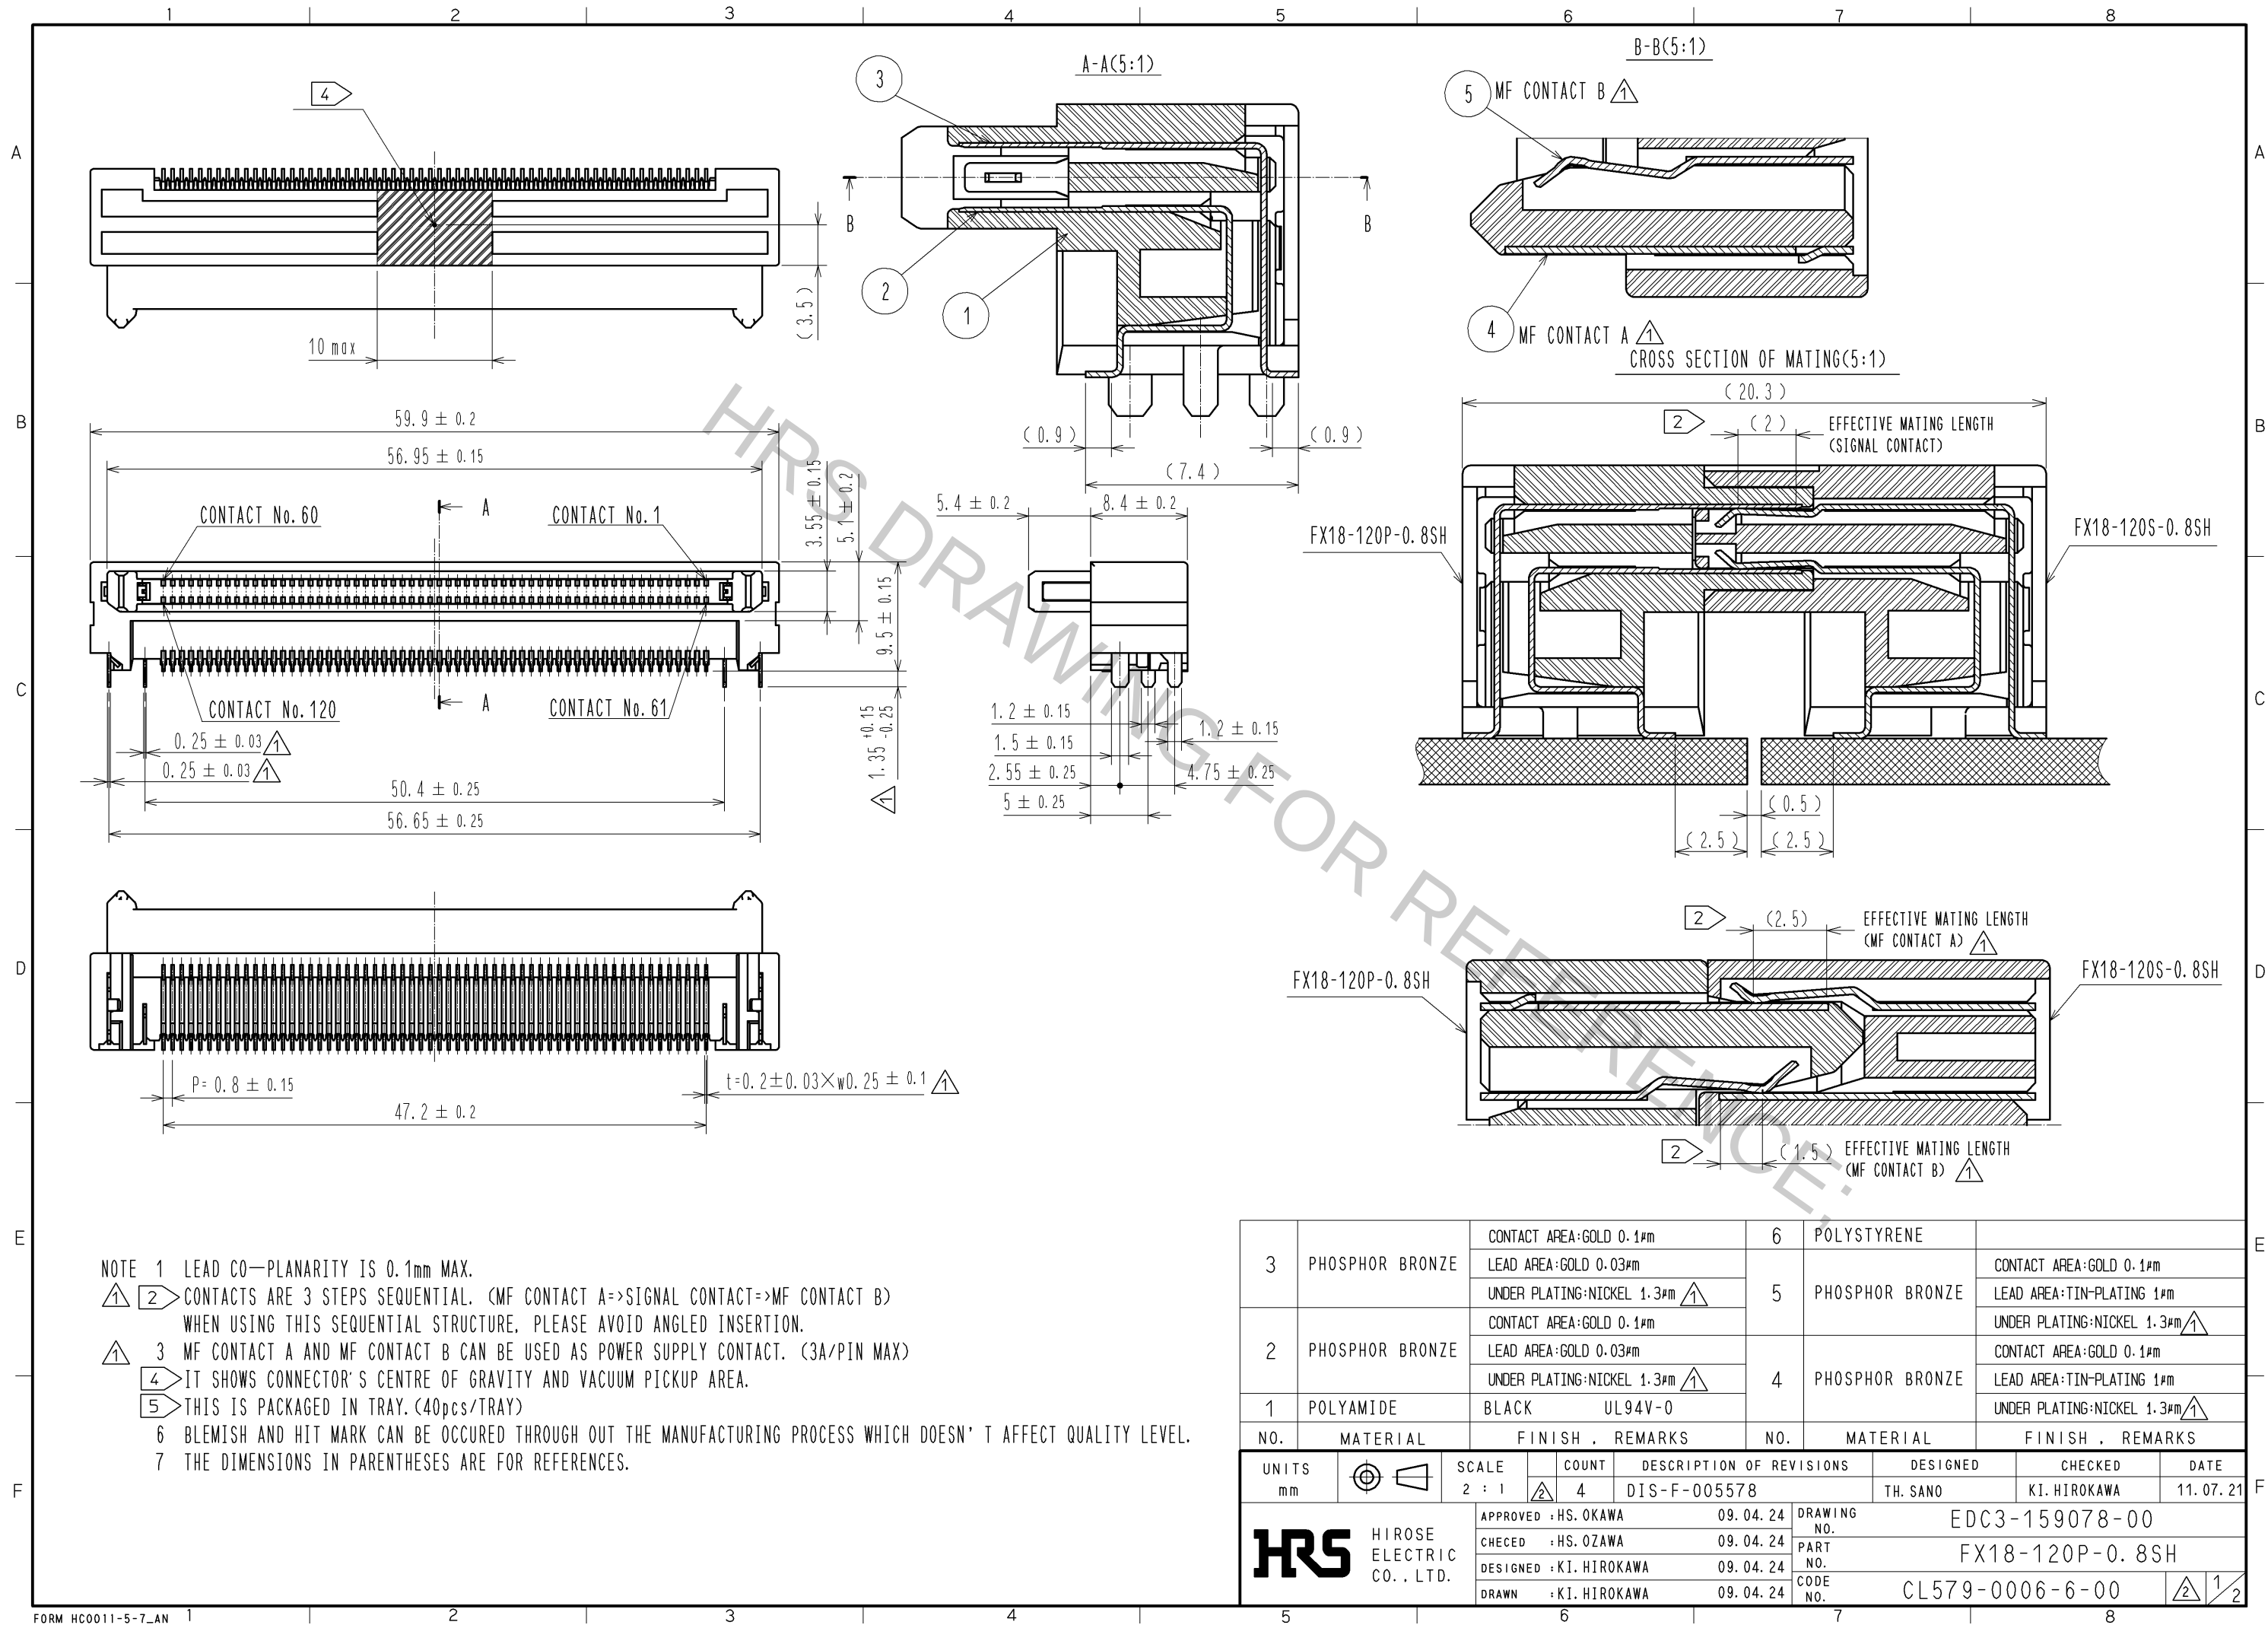