






E

D


C

B

A

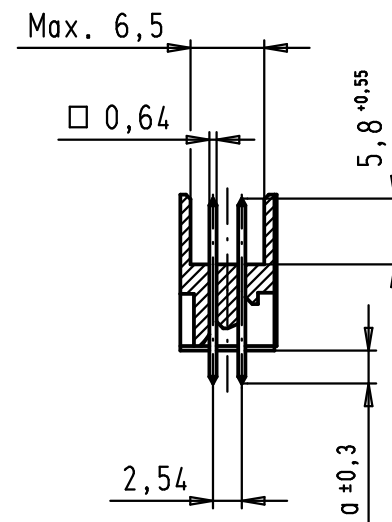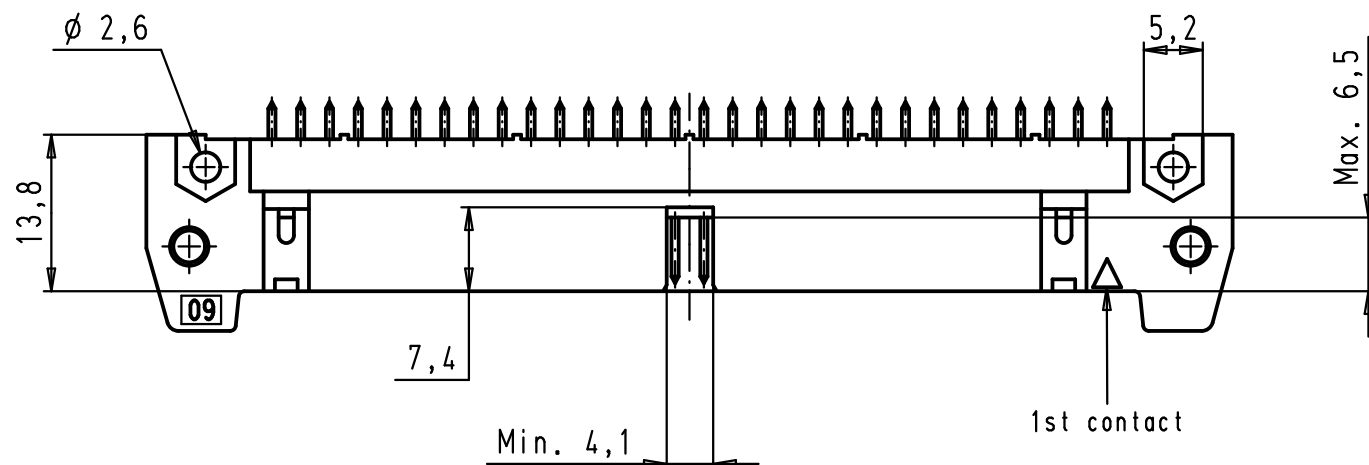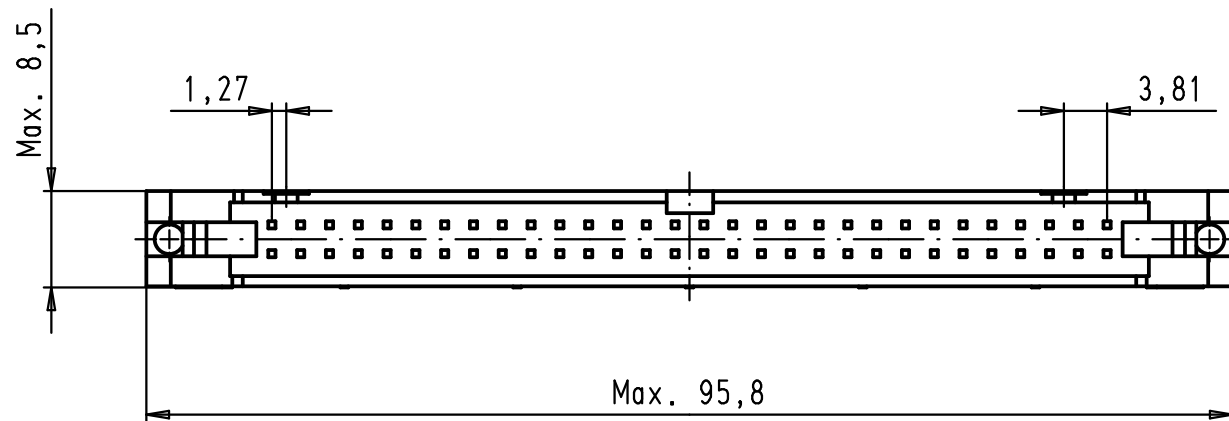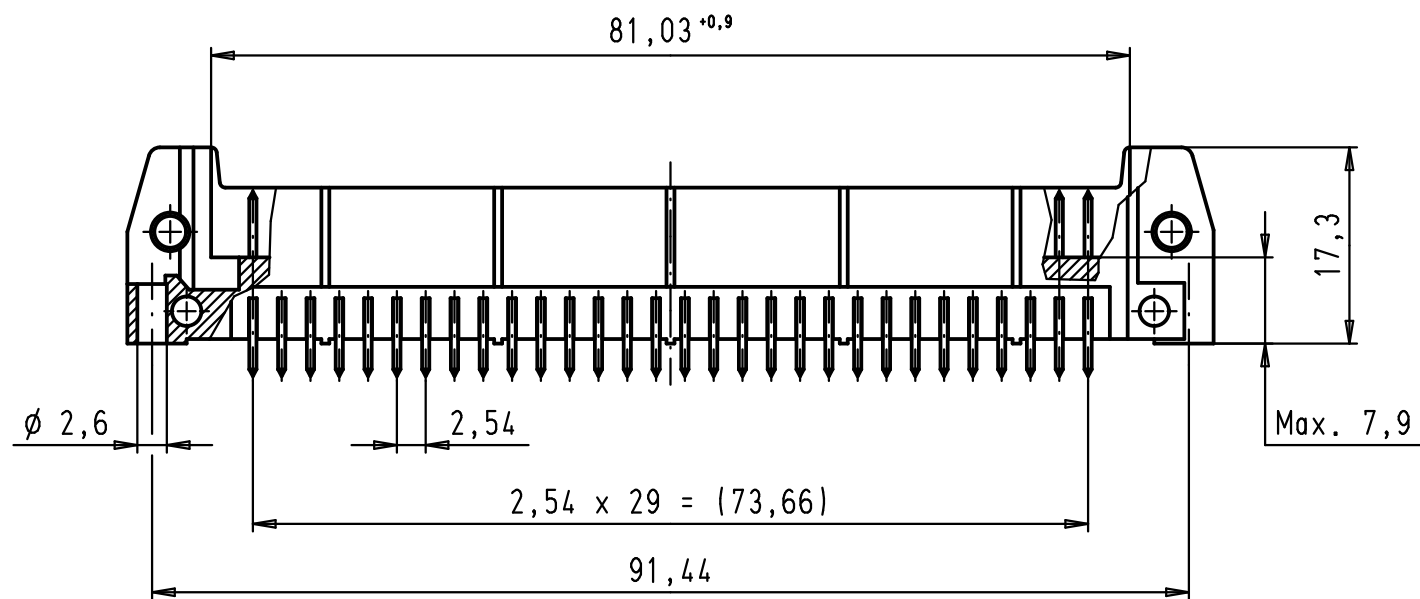


PCB layout, component side

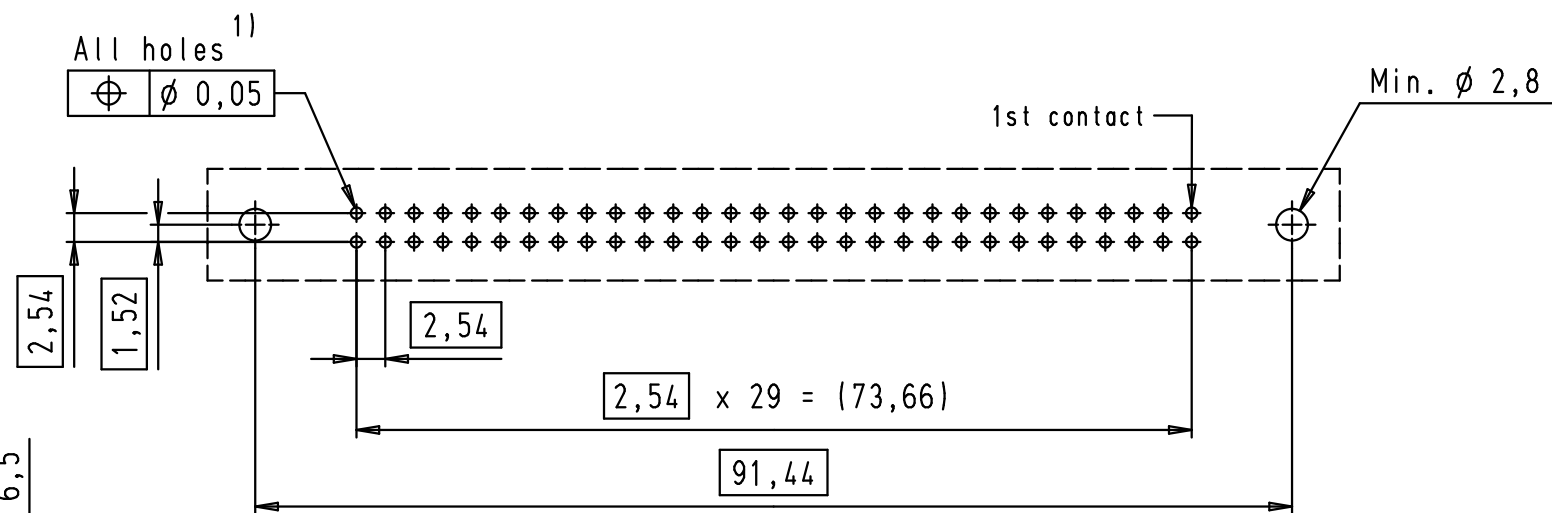

1) Solder pins for PCB connections
 $\varnothing 1 \pm 0,1$ according to IEC 60 326-3

09 18 560 7922	3	4,5
09 18 560 6922	2	4,5
09 18 560 5922	0,76 $\mu\text{m Au}$	4,5
09 18 560 7924	3	2,9
09 18 560 6924	2	2,9
09 18 560 5924	0,76 $\mu\text{m Au}$	2,9
Part number	Performance level	a

				Det.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 18 Male Connector Standard 60 poles Straight solder pins Without locking levers	Maßstab/ Scale 1,5:1
			Detail.	01/12/99	JB			
			Insp.					
			Stand.					
34900	29/01/08	LP					TB 09 18 560 X92X	Blatt/ Page 1 / 2
27931	15/06/00	JB						
26554	01/12/99	JB						
Mod.	Det.	Name	HARTING EURL F-95972 Paris			Sub.		