

# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay



1272930

<https://www.phoenixcontact.com/in/products/1272930>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Set of 60 coupling relays for SIL 3 low-demand applications, couples digital output signals to the I/O, 1 independently controllable enabling current path, safe state off applications, test pulse filter, plug-in screw terminal block

## Product description

Set of 60 coupling relays The safe coupling relay couples digital output signals from failsafe controllers to I/O devices and is used for power adaptation and electrical isolation. The safe coupling relay can be used in low-demand applications. The safe coupling relay safely interrupts circuits.

## Your advantages

- Up to SIL 3 in accordance with IEC 61508, IEC 61511, and IEC 50156
- Low housing width of just 12.5 mm
- Long service life thanks to filtering of controller test pulses
- 1 enabling current path

## Commercial data

Item number	1272930
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNA
Product key	DNA161
GTIN	4063151463991
Weight per piece (including packing)	6,202 g
Weight per piece (excluding packing)	5.593 g
Customs tariff number	85371098
Country of origin	DE

# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay



1272930

<https://www.phoenixcontact.com/in/products/1272930>

## Set consists of

### PSR-PE20-1NO-24DC-SC - Coupling relay

1119573

<https://www.phoenixcontact.com/in/products/1119573>



Coupling relay for SIL 3 low-demand applications, couples digital output signals to the I/O, 1 independently controllable enabling current path, safe state off applications, test pulse filter, plug-in screw terminal block

# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay



1272930

<https://www.phoenixcontact.com/in/products/1272930>

## Technical data

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

### Product properties

Product type	Coupling relay
Product family	PSRclassic
Application	Safe switch off
	Low demand
Mechanical service life	10x 10 <sup>6</sup> cycles
Relay type	Electromechanical relay in accordance with IEC/EN 61810

#### Times

Typ. starting time with $U_S$	< 70 ms (when controlled via A3 at $U_S$ )
Typical release time	< 50 ms (on demand via A3 at $U_S$ )
Recovery time	500 ms

### Electrical properties

Maximum power dissipation for nominal condition	2.36 W ( $U_B = 26.4$ V, $U_S = 24$ V, $I_S = 40$ mA, $I_L^2 = 16$ A, $R_{\text{contact}} = 0.075$ $\Omega$ )
Nominal operating mode	100% operating factor

#### Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V AC
Rated surge voltage/insulation	Safe isolation, reinforced insulation 6.4 kV between 250 V load current paths and 24 V logic paths
	Basic insulation 4 kV between all current paths and housing

#### Supply

Designation	3/4
Rated control circuit supply voltage $U_S$	21.6 V DC ... 26.4 V DC
Rated control circuit supply voltage $U_S$	24 V DC -10 % ... +10 %
Rated control supply current $I_S$	40 mA
Power consumption at $U_S$	960 mW
Inrush current	typ. 100 mA ( $\Delta t = 10$ ms at $U_S$ )
Filter time	1 ms (in the event of voltage dips at $U_S$ )
Protective circuit	Serial protection against polarity reversal; Suppressor diode, 38.6 V/600 W (connections 3/4)

### Output data

#### Relay: Enabling current path (5/6)

Output description	1 NO
Number of outputs	1 (safety-related)

# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay



1272930

<https://www.phoenixcontact.com/in/products/1272930>

Contact switching type	1 enabling current path
Contact material	AgSnO <sub>2</sub> , gold-plated
Switching voltage	min. 12 V DC
	max. 250 V AC/DC (Observe the load curve)
Switching capacity	min. 120 mW
Inrush current	min. 10 mA
	max. 4 A
Limiting continuous current	4 A (Low demand)
Sq. Total current	16 A <sup>2</sup> (Low-demand, observe derating)
Switching frequency	1 Hz
Mechanical service life	10x 10 <sup>6</sup> cycles
Output fuse	4 A gL/gG (for low-demand applications)

## Connection data

### Conductor connection

Connection method	Screw connection
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross-section AWG	24 ... 12
Stripping length	7 mm
Screw thread	M3
Tightening torque	0.6 Nm

## Signaling

Status display	1 x LED (green)
----------------	-----------------

## Dimensions

Width	12.5 mm
Height	99 mm
Depth	114.5 mm

## Material specifications

Color (Housing)	traffic grey B (RAL 7043)
Housing material	PA

## Characteristics

Safety data: IEC 61508 - Low-demand for 1-channel wiring (1oo3 structure without diagnostics)

Safety Integrity Level (SIL)	3
------------------------------	---

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54

# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay



1272930

<https://www.phoenixcontact.com/in/products/1272930>

Ambient temperature (operation)	-40 °C ... 70 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g
Vibration (operation)	10 Hz ... 150 Hz, 2g

## Approvals

CE

Identification	CE-compliant
----------------	--------------

## Standards and regulations

Air clearances and creepage distances between the power circuits

Standards/regulations	EN 61010-1, EN 60947-1, EN 60079-15
-----------------------	-------------------------------------

## Mounting

Mounting type	DIN rail mounting
Assembly note	See derating curve
Mounting position	vertical or horizontal

# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay




1272930

<https://www.phoenixcontact.com/in/products/1272930>

## Drawings

Circuit diagram

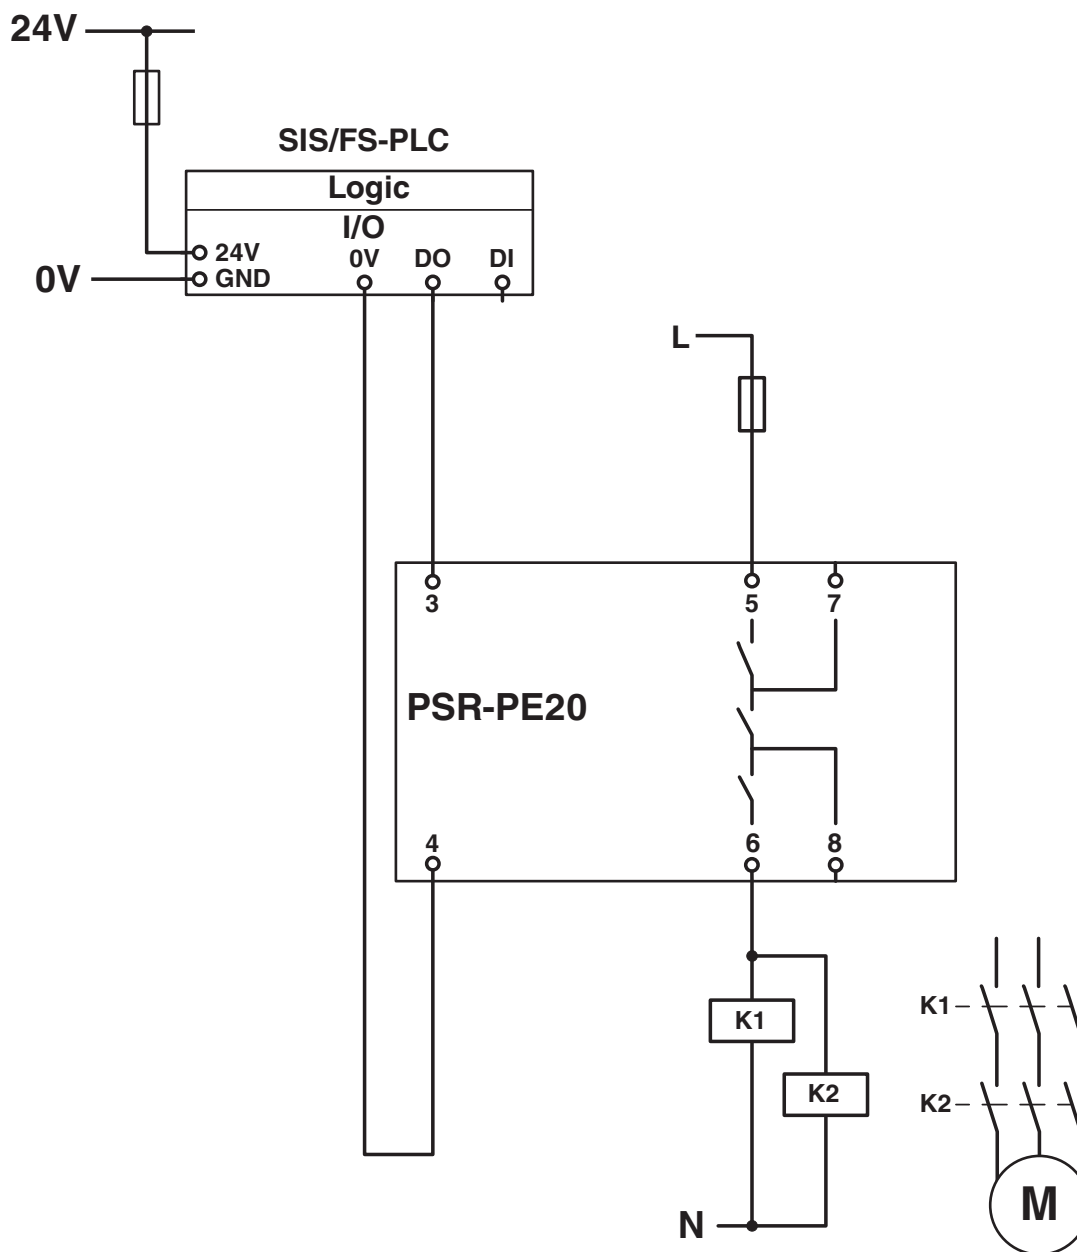

Example application


# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay



1272930

<https://www.phoenixcontact.com/in/products/1272930>

Block diagram

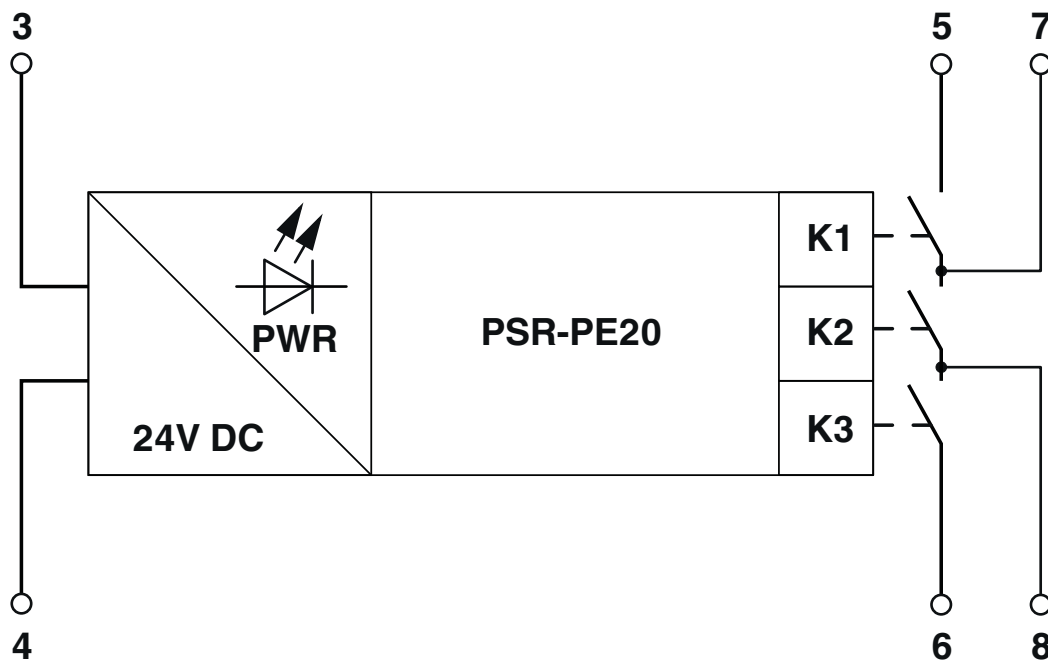

Block diagram

# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay



1272930

<https://www.phoenixcontact.com/in/products/1272930>

## Approvals

📄 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1272930>



### Functional Safety

Approval ID: 44-780-15124320



# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay



1272930

<https://www.phoenixcontact.com/in/products/1272930>

## Classifications

### ECLASS

ECLASS-11.0	27371819
ECLASS-13.0	27371819
ECLASS-12.0	27371819

### ETIM

ETIM 9.0	EC001449
----------	----------

### UNSPSC

UNSPSC 21.0	39122200
-------------	----------

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f8028487-9618-4303-80b1-9d6d37cebd60

# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay



1272930

<https://www.phoenixcontact.com/in/products/1272930>

## Accessories

### PSR-PE20-1NO-24DC-SC - Coupling relay

1119573

<https://www.phoenixcontact.com/in/products/1119573>



Coupling relay for SIL 3 low-demand applications, couples digital output signals to the I/O, 1 independently controllable enabling current path, safe state off applications, test pulse filter, plug-in screw terminal block

---

### CP-MSTB - Coding profile

1734634

<https://www.phoenixcontact.com/in/products/1734634>



Coding profile, is inserted into the slot on the plug or inverted header, red insulating material

# PSR-PE20-1NO-24DC-SC-SET60 - Coupling relay



1272930

<https://www.phoenixcontact.com/in/products/1272930>

## CR-MSTB - Coding section

1734401

<https://www.phoenixcontact.com/in/products/1734401>

Coding section, inserted into the recess in the header or the inverted plug, red insulating material



---

## CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/in/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp

---

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.  
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420  
[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)