

IZS40/41/42, Ionizer IZS40-820-06B

Datasheet





- IZS40: Basic type (AC, DC) / IZS41: High speed (AC, Sensing AC, DC) / IZS42: Dual AC type.
- Controller integrated in the bar.
- Autobalance sensor, feedback sensor.
- Wireless remote control.
- Transition wiring for ionizers serial connection.
- Display and warning alarms.

Standard specifications


Type	40 (Standard type)
Bar Length	820mm
Electrode Needle Material	High speed de-ionizing cartridge (Tungsten)
Output	NPN (or none for type 40)
Power Supply Cable	3m
One-touch fitting	06
Bracket	B (With bracket)
Sensor	Built-in Sensor
Option	None
Maximum operating pressure	0.5 MPa or less
Proof pressure	0.7 MPa
Maximum ambient temperature	40 °C
Minimum ambient temperature	0 °C
Conform to the European RoHS Directive	Conform
Approvals	CE
Power supply	24 VDC $\pm 10\%$
Current consumption	330 mA or less

Material	Body cover: ABS, Emitter cartridge: PBT, Emitter: Tungsten, Single crystal silicon
Applicable fluid	Air (Clean dry air)
Ion generation method	Corona discharge type
Method of applying voltage	AC, DC
Applied voltage	±7000 V
Ambient humidity	35 to 80% RH (No condensation)
Offset voltage	Within ±30 V
Effective static neutralization distance	50 to 2000 mm
Weight	1.104 Kg

Dimensions



Constructions

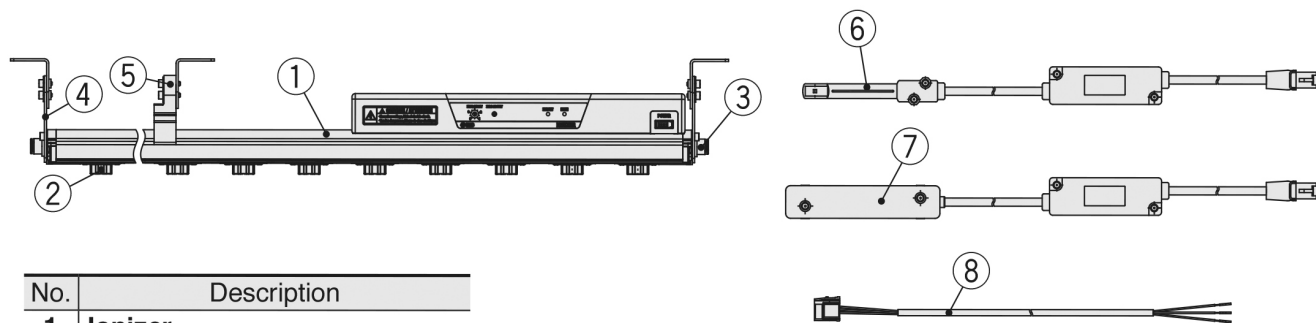

No.	Description
1	Ionizer
2	Emitter cartridge
3	One-touch fitting
4	End bracket
5	Intermediate bracket
6	Feedback sensor
7	Auto balance sensor [High accuracy type]
8	Power supply cable (for IZS40)

Additional information

Catalogue	IZS40_41_42-C_EU.pdf
Declaration of conformity	newDoC_IZS4_TF1V243EN.pdf newDoC_IZS_TF1Y251EN.pdf DoC_IZS4x_TDQ0038.pdf
Installation manuals	IMM_IZS4x_SMW29EN-A.pdf
Operation manuals	OM_IZS4x_OMP0064EN-D.pdf