
Data Sheet

NPL-Series - Valve Regulated Lead Acid Batter NPL200-6 (FR)

SPECIFICATIONS			
Nominal voltage	6	V	
20-hr rate Capacity to 10.5V at 20°C	200	Ah	
10-hr rate Capacity to 10.8V at 20°C	176	Ah	
DIMENSIONS			
Length	398 (±0.7)	mm	
Width	176 (±0.5)	mm	
Height	250 (±0.7)	mm	
(height over terminals)	N/A	mm	
Mass (typical)	39.0	kg	
TERMINAL TYPE		Ţ	
Post type terminal	10	mm	
Torque	16.5	Nm	
OPERATING TEMPERATURE RANGE			
Storage (in fully charged condition)	-20°C to +50°C		
Charge		-15°C to +50°C	
Discharge	-20°C to +60°C		
STORAGE	25 3 10		
Capacity loss per month at 20°C (approx)	3	%	
CASE MATERIAL		,,	
Standard Option	ABS (UL	ABS (UL.94:HB)	
Flame retardant option (FR)	ABS (UL94:V0)		
CHARGE VOLTAGE	7.23 (3.	20 1. 10)	
	6.825 (±1%)	V	
Float charge voltage at 20°C	2.275 (±1%)	V/cell	
Float Charge voltage temperature correction factor	, i) // II/0 O	
(for variations from the standard 20°C)	-3	mV/cell/°C	
Cyclic (or Boost) charge at 20°C	7.26 (±3%)	V	
	2.42 (±3%)	V/cell	
Cyclic Charge voltage temperature correction factor	-4	mV/cell/°C	
(for variations from the standard 20°C)			
CHARGE CURRENT			
Float charge current limit	No limit	A	
Cyclic (or Boost) charge current limit	50.00	A	
MAXIMUM DISCHARGE CURRENT			
1 second	1500	A	
1 minute	600	A	
SHORT-CIRCUIT CURRENT & INTERNAL RESISTANCE			
(according to EN IEC 60896-21)			
Internal resistance	N/A	mΩ	
Short-Circuit current	N/A	Α	
IMPEDANCE			
Measured at 1 kHz	1.3	mΩ	
PERFORMANCE & CHARACTERISTICS			
Refer to the technical manual	NPL		
DESIGN LIFE			
EUROBAT Classification: High performance	10 to 12	years	
Yuasa design life @ 20°C SAFETY	up to 10	years	



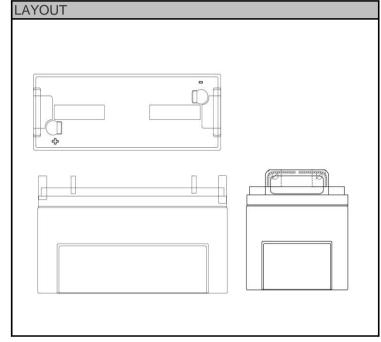

3RD PARTY CERTIFICATIONS

ISO 9001 - Quality Management Systems
ISO 14001 - Environmental Management Systems
EN 18001 - OHSAS Management Systems
UNDERWRITERS LABORATORIES Inc.



STANDARDS

IEC61056 IEC60896-21/22







ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE Issue No.: V.2 / Issue Date: March 2011



YUASA BATTERY SALES UK LTD. Unit 13, Hunts Rise South Marston Industrial Estate Swindon SN3 4TG UK

SAFETY

Installation

Can be installed and operated in any orientation except permanently inverted

Handles

Batteries must not be suspended by their handles (where fitted)

Vent valves

Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.

Gas Release

VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container

Recycling

YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations