SIEMENS

Data sheet

3VA1132-3EF42-0AA0



circuit breaker 3VA1 IEC frame 160 breaking capacity class N Icu=25kA @ 415V 4-pole, line protection TM240, ATAM, In=32A overload protection Ir=22A...32A short-circuit protection Ii=5...10 x In N conductor unprotected nut keeper kit

SENTRON Molded case circuit breaker Line protection TM240 LI 4 800 V 600 V 600 V 690 V 10.6 W
Line protection TM240 LI 4 800 V 600 V 690 V
TM240 LI 4 800 V 600 V 690 V
LI 4 800 V 600 V 690 V
4 800 V 600 V 690 V
800 V 600 V 690 V
600 V 690 V
600 V 690 V
690 V
10.6 W
10.0 W
20 000
9 000
6 300
No
Without
No
No
1.219 kg
32 A
32 A
32 A
31 A
31 A
30 A
30 A
Ν
36 kA
25 kA
16 kA
7 kA
7 kA

• at 240 V	36 kA
• at 415 V	25 kA
• at 440 V	16 kA
• at 500 V	5 kA
• at 690 V	5 kA
short-circuit current making capacity (Icm)	
• at 240 V	75.6 kA
• at 415 V	52.5 kA
• at 440 V	32 kA
• at 500 V	11.9 kA
• at 690 V	11.9 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with	
I2t characteristic	
• minimum	22 A
• maximum	32 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	1s
• maximum	1s
adjustable response value setting current (li) / for I-tripping	400.4
• minimum	160 A
• maximum	320 A
adjustable setting current (InN) / for N-tripping	0.4
• minimum	
maximum design of the N conductor protection	0 A
design of the N-conductor protection product function / grounding protection	No
Mechanical Design	
product component	
undervoltage release	No
voltage trigger	
	No
• trip indicator	No
trip indicator	
	No
• trip indicator height [in]	No 5.12 in
trip indicator height [in] height	No 5.12 in 130 mm
trip indicator height [in] height width [in]	No 5.12 in 130 mm 4 in
trip indicator height [in] height width [in] width	No 5.12 in 130 mm 4 in 101.6 mm
trip indicator height [in] height width [in] width depth [in]	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in
trip indicator height [in] height width [in] width depth [in] depth	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in
trip indicator height [in] height width [in] width depth [in] depth Connections	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal
trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends
trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm
trip indicator height [in] height width [in] width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of the surface / of the connections / on the top of the	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm
trip indicator height [in] height width [in] width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
trip indicator height [in] height width [in] width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
trip indicator height [in] height width [in] width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connector / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
trip indicator height [in] height width [in] width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
trip indicator height [in] height width [in] width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connector / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0
trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0
trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connector / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0 Yes
trip indicator height [in] height width [in] width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0 Yes
trip indicator height [in] height width [in] width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin Ves IP40

 during storage / m 	ninimum		-40 °C			
during storage / maximum		80 °C				
Environmental footprint						
Environmental Product Declaration(EPD)			Yes			
Global Warming Potential [CO2 eq] / total			190 kg			
Global Warming Potential [CO2 eq] / during manufacturing			4.67 kg			
Global Warming Potential [CO2 eq] / during operation			186 kg			
global warming potential [CO2 eq] / after end of life			-0.826 kg	9		
reference code / accordi	ing to IEC 81346-2		Q			
Approvals / Certificates						
General Product Appr	oval					EMC
	<u>Confirmation</u>		,	<u>Miscellaneous</u>	EHC	RCM
Declaration of Conform	nity	Test Certificate	es			Marine / Shipping
CE EG-Konf.	UK CA	<u>Special Test Ce</u> <u>ate</u>	<u>ertific-</u>	<u>Miscellaneous</u>	Type Test Certific- ates/Test Report	ABS
Marine / Shipping						other
BUREAU VERITAS		Lloyds Register uis		KMRS RMRS	<u>CCS / China Classific-</u> ation Society	<u>Confirmation</u>
other		Environment				
Miscellaneous	<u>Miscellaneous</u>	Environmental (<u>firmations</u>				

Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs


Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1132-3EF42-0AA0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

- https://support.industry.siemens.com/cs/ww/en/ps/3VA1132-3EF42-0AA0
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1132-3EF42-0AA0
- **CAx-Online-Generator**
- http://www.siemens.com/cax
- **Tender specifications**


http://www.siemens.com/specifications

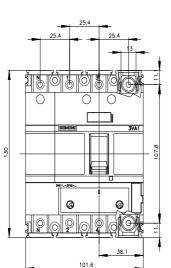

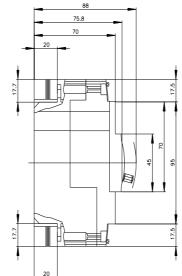

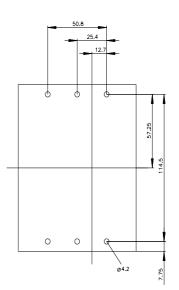

 25.4

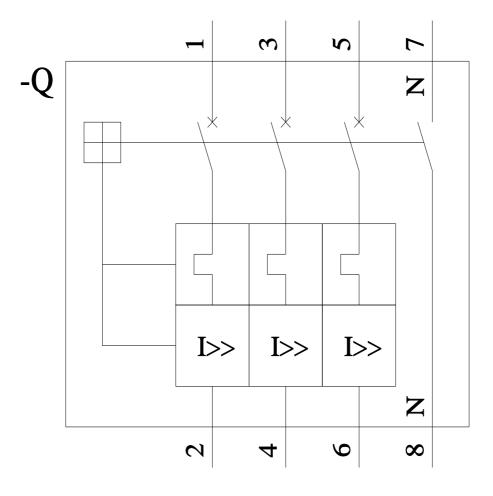

11/3/2023 🖸