

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



QUINT AC UPS, IQ Technology, Panel mounting, input: 120 V AC, output: 120 V AC / 2500 VA.
At least 2x 1133819 are required for operation.

Product description

The QUINT HP UPS for panel mounting, with IQ Technology and matching external battery module, ensures superior system availability. The online topology with a pure sine wave reliably supplies your AC loads with a perfect voltage at powers ranging from 1.5 kVA to 2.5 kVA.

Your advantages

- Pure sine wave in normal and battery operation
- Can be switched in parallel for increased performance, redundancy, or for a 3 AC system
- Startup from the energy storage system possible, even without mains input
- Communication platform: Com.board with USB or serial interface
- Compact design with active cooling

Commercial data

Item number	1136813
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	CMUW15
GTIN	4063151073237
Weight per piece (including packing)	6,122 g
Weight per piece (excluding packing)	5,700 g
Country of origin	DE

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

Technical data

Notes

General

Note on the battery	For proper operation of the UPS, at least 2 QUINT-HP-BAT/PB/48DC/7.0AH/PT (1133819) battery modules are required. For longer buffer times, multiples of 2 battery modules must always be connected to the UPS (2, 4, 6, 8, or 10). A maximum of 10 batteries can be connected to a single UPS.
---------------------	--

Input data

Input voltage	100 V AC -10 % / +20 %
	110 V AC -10 % / +20 %
	120 V AC -10 % / +15 %
	130 V AC -15 % / +10 %
Voltage type of supply voltage	AC
Frequency range (f_N)	47.5 Hz ... 52.5 Hz
	57 Hz ... 63 Hz
Bypass fuse	40 A T 250 V
Permissible backup fuse	40 A (Listed breaker)
Current consumption	nom. 24 A (100 V AC)
	nom. 23.3 A (110 V AC)
	nom. 24 A (120 V AC)
	nom. 23.4 A (130 V AC)
	max. 34.4 A (100 V AC)
	max. 31.2 A (110 V AC)
	max. 35.4 A (120 V AC)
Rated short-time current carrying capacity I_{cw}	max. 34.6 A (130 V AC)
	6 kA

Output data

Classification according to IEC 62040-3	VFI-SS-111
Efficiency	> 94 % (100% load, battery charged)
	> 90 % (100% load, battery charged)
Apparent power	2500 VA
Real power	2250 W
Power factor (cos phi)	0.9
Crest factor	2.5
Switch-over time	0 ms
Connection in parallel	yes
	max. 3
Connection in series	no

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

Overload capability Mains operation	120 % ... 150 % (20 s / 5 s, then switch to bypass operation)
Overload capability Battery operation	120 % ... 150 % (20 s / 5 s, then shutdown)
Overload capability Bypass mode	120 % ... 150 % (for a sustained period / 20 s, then shutdown)
Rated short-time current carrying capacity I _{cw}	6 kA

Mains operation

Output voltage	100 V AC ± 2 %
	110 V AC ± 2 %
	120 V AC ± 2 %
	130 V AC ± 2 %
Form of output voltage	Pure sine
Output current	nom. 20 A (100 V AC)
	nom. 18.2 A (110 V AC)
	nom. 20.8 A (120 V AC)
	nom. 19.2 A (130 V AC)
Maximum no-load power dissipation	9 W
Power loss nominal load max.	< 120 W (100% load, battery charged)
Nominal output frequency	50 Hz
	60 Hz
	± 0.5 % (Output frequency tolerance)
Electronic current limitation	> 2 x Output: Current nom. (> 200 ms)

Battery operation

Maximum no-load power dissipation	9 W
Power loss nominal load max.	250 W (100% load, battery charged)
Nominal output frequency	50 Hz
	60 Hz
	± 0.5 % (Output frequency tolerance)
Total harmonic distortion factor (THD)	< 3 % (linear load)
	< 8 % (non-linear load)
Electronic current limitation	> 2 x Output: Current nom. (> 200 ms)

Energy storage

Input

Input voltage	48 V DC
	max. 60 V DC
Input current	max. 40 A
Nominal capacity range	7 Ah ... 200 Ah
Charging current	max. 10 A

Output

Short-circuit current	650 A (< 1,5 ms)
-----------------------	------------------

General

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

Connection in parallel	yes
	max. 5 (per battery string)
Connection in series	no
IQ-Technology	yes
Permissible backup fuse	40 A
Temperature sensor	yes
Permissible backup fuse	40 A

Connection data

Input

Position	1.x
Identification	1.1 (L), 1.2 (N), 1.3 (⊕   

Connection technology

Position marking	1.1 (L), 1.2 (N), 1.3 (⊕   
------------------	--

Conductor connection

Connection method	Push-in connection
rigid	4 mm² ... 6 mm²
flexible	4 mm² ... 6 mm²
flexible with ferrule without plastic sleeve	4 mm²
flexible with ferrule with plastic sleeve	4 mm²
AWG	10
Stripping length	10 mm

Output

Position	2.x
Identification	2.1 (L), 2.2 (N), 2.3 (⊕   

Connection technology

Position marking	2.1 (L), 2.2 (N), 2.3 (⊕   
------------------	--

Conductor connection

Connection method	Push-in connection
rigid	4 mm² ... 6 mm²
flexible	4 mm² ... 6 mm²
flexible with ferrule without plastic sleeve	4 mm²
flexible with ferrule with plastic sleeve	4 mm²
AWG	10
Stripping length	10 mm

Output

Position	2.x
Identification	2.4 (L'), 2.5 (N), 2.6 (⊕   

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

Connection technology

Position marking	2.4 (L'), 2.5 (N), 2.6 (⊕/⊖)
------------------	------------------------------

Conductor connection

Connection method	Push-in connection
rigid	4 mm ² ... 6 mm ²
flexible	4 mm ² ... 6 mm ²
flexible with ferrule without plastic sleeve	4 mm ²
flexible with ferrule with plastic sleeve	4 mm ²
AWG	10
Stripping length	15 mm

Battery

Position	4.x
Identification	4.1, 4.2; 4.3, 4.4

Connection technology

Position marking	4.1 (+), 4.2 (-), 4.3 (+), 4.4 (-)
------------------	------------------------------------

Conductor connection

Connection method	Push-in connection
rigid	6 mm ² ... 16 mm ²
flexible	6 mm ² ... 16 mm ²
flexible with ferrule without plastic sleeve	6 mm ² ... 16 mm ²
flexible with ferrule with plastic sleeve	6 mm ² ... 16 mm ²
AWG	8 ... 6
Stripping length	18 mm

Signal

Position	3.x
Identification	3.1 ... 3.9

Connection technology

Position marking	3.1 (Alarm), 3.2 (Bat.-Mode), 3.3 (Power Good), 3.4 (Ready), 3.5 (P>Pn), 3.6 (Service Required), 3.7 (Bat.-Start), 3.8 (Remote), 3.9 (SGnd)
------------------	---

Conductor connection

Connection method	Push-in connection
rigid	0.2 mm ² ... 4 mm ²
flexible	0.2 mm ² ... 4 mm ²
flexible with ferrule without plastic sleeve	0.2 mm ² ... 2.5 mm ²
flexible with ferrule with plastic sleeve	0.2 mm ² ... 2.5 mm ²
AWG	24 ... 12
Stripping length	10 mm

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

Interfaces

Interface	Battery module communication interface
Number of interfaces	1
Connection method	RJ45
Position	5.x
Locking	Locking clip
Transmission physics	Twisted-Pair 4x2
Interface	Parallel operation communication interface
Number of interfaces	2
Connection method	RJ45
Position	5.x
Locking	Locking clip
Transmission physics	Twisted-Pair 4x2

Signaling

Signal input Bat.-Start

Low signal	Connection to SGnd with < 2.7 kΩ
High signal	Open (> 200 kΩ between Bat.-Start and SGnd)

Signal input Remote

Low signal	Connection to SGnd with < 2.7 kΩ
High signal	Open (> 35 kΩ between Remote and SGnd)

Signal output Alarm

Position	3.x
Signalization designation	Alarm
Position marking	3.1 (Alarm)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

Signal output Battery Mode

Position	3.x
Signalization designation	Bat.-Mode
Position marking	3.2 (Bat.-Mode)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

Signal output Power Good

Position	3.x
Signalization designation	Power Good
Position marking	3.3 (Power Good)

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

Signal output Ready

Position	3.x
Signalization designation	Ready
Position marking	3.4 (Ready)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

Signal output $P > P_N$

Position	3.x
Signalization designation	$P > P_n$
Position marking	3.5 ($P > P_n$)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

Signal output Service Required

Position	3.x
Signalization designation	Service Required
Position marking	3.6 (Service Required)
Switching output	Transistor output, active
Output voltage	24 V
Continuous load current	≤ 20 mA

Signal ground SGnd

Function	Signal ground
Reference potential	For signal inputs and signal outputs

Product properties

Product type	AC UPS
Product family	QUINT AC UPS

Insulation characteristics

Protection class	I
Overvoltage category	II
Pollution degree	3

Dimensions

Item dimensions

Width	188 mm
Height	240 mm

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

Depth	143 mm
Drill hole	
Diameter	5.5 mm
Installation dimensions	
Installation distance right/left	0 mm / 0 mm
Installation distance top/bottom	50 mm / 50 mm

Mounting

Mounting type	Panel mounting
---------------	----------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C (> 50 °C: 2,5 % / K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 4000 m (> 1000 m: 3 % / 1000 m)
Max. permissible relative humidity (operation)	≤ 95 %
Shock	30g in each direction, according to IEC 60068-2-27
Vibration (operation)	5 Hz ... 100 Hz, 0.7g (EN 60068-2-6)

Standards and regulations

Uninterruptible power supply systems

Standard designation	Uninterruptible power supply systems
Standards/specifications	EN 62040-1
	EN 62040-2

Approvals

UL

Identification	UL/C-UL Recognized UL 1778
----------------	----------------------------

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
Interference emission	Noise emission
Noise immunity	Immunity

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	± 6 kV
Discharge in air	± 8 kV

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

Comments	Criterion A
Electromagnetic HF field	
Standards/regulations	EN 61000-4-3
Electromagnetic HF field	
Frequency range	80 MHz ... 6 GHz
Test field strength	10 V/m
Comments	Criterion A
Fast transients (burst)	
Standards/regulations	EN 61000-4-4
Fast transients (burst)	
Input	± 2 kV
	± 2 kV
Output	± 2 kV
Signal	± 2 kV
	± 2 kV (Communication parallel operation, battery module)
Comments	Criterion A
Surge voltage load (surge)	
Standards/regulations	EN 61000-4-5
Surge voltage load (surge)	
Signal	1 kV (asymmetrical)
Comments	Criterion B
Input/Output	± 1 kV (symmetrical)
	± 2 kV (asymmetrical)
Conducted interference	
Standards/regulations	EN 61000-4-6
Conducted interference	
Frequency range	0.15 MHz ... 80 MHz
Signal	10 V (asymmetrical)
Comments	Criterion A
Power frequency magnetic field	
Standards/regulations	EN 61000-4-8
Frequency	60 Hz
Signal	30 A/m
Comments	Criterion A
Harmonic and interharmonic components	
Standards/regulations	EN 61000-4-13
Harmonic and interharmonic components	

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply




1136813
<https://www.phoenixcontact.com/in/products/1136813>


Comments	Criterion A
Criteria	
Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

1136813
<https://www.phoenixcontact.com/in/products/1136813>

Drawings

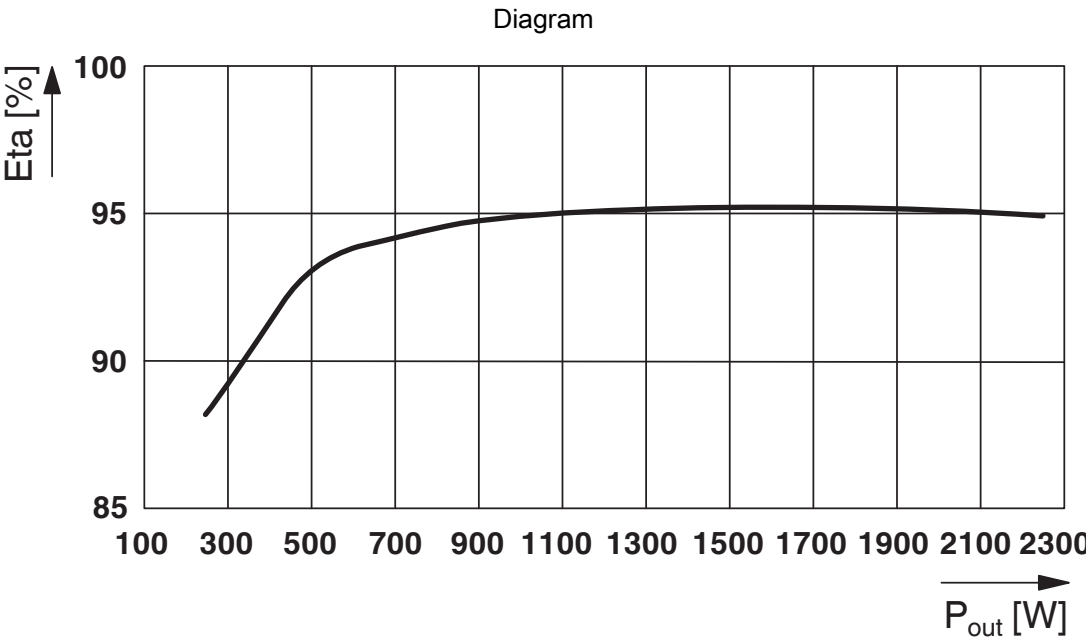

Efficiency (normal operation)

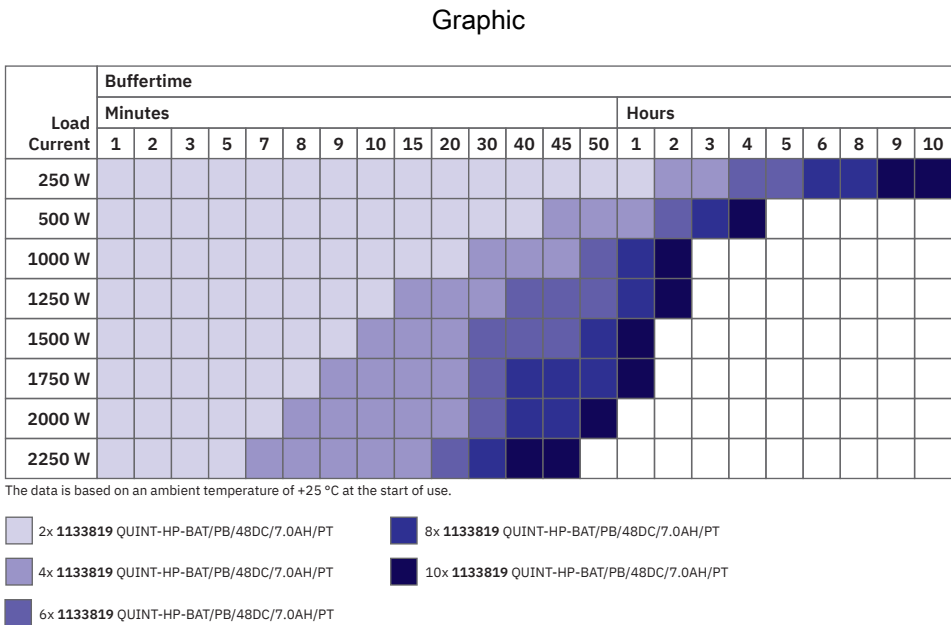


QUINT HP UPS 2.5 kVA buffer times

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

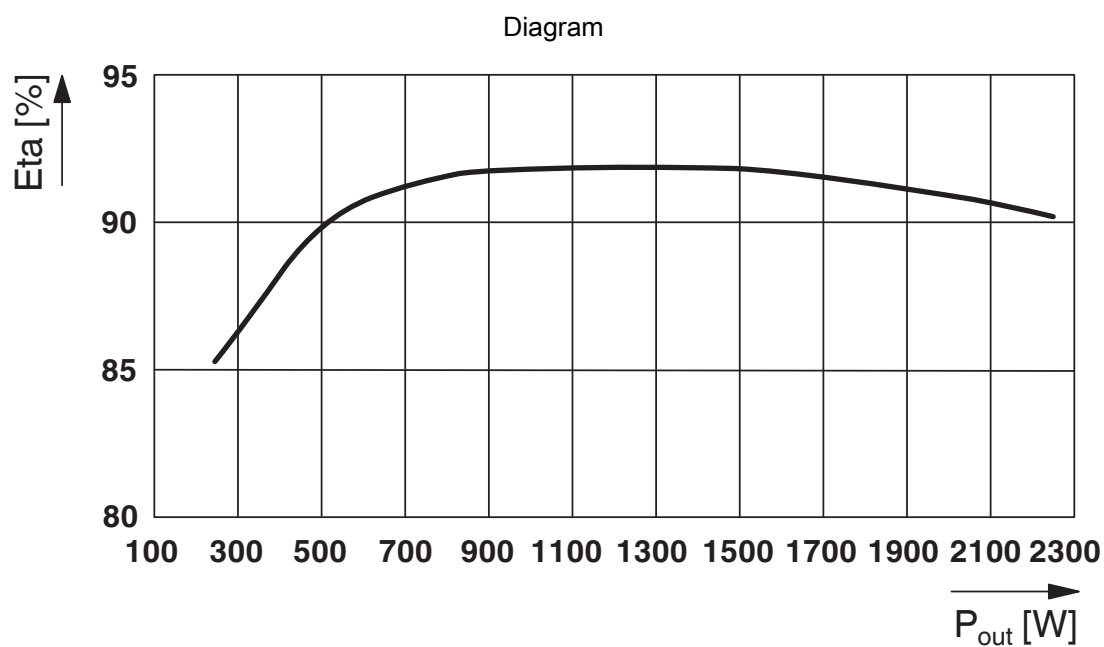

Efficiency (battery operation)

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813
<https://www.phoenixcontact.com/in/products/1136813>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1136813>



cULus Recognized
Approval ID: E342453-20230825



cUL Recognized
Approval ID: E359066-20230901



UL Recognized
Approval ID: E359066-20230901

cULus Recognized

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813
<https://www.phoenixcontact.com/in/products/1136813>

Classifications

ECLASS

ECLASS-13.0	27040705
ECLASS-11.0	27040705

ETIM

ETIM 9.0	EC000382
----------	----------

1136813
<https://www.phoenixcontact.com/in/products/1136813>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

Mandatory accessories

QUINT-HP-BAT/PB/48DC/7.0AH/PT - Battery module

1133819

<https://www.phoenixcontact.com/in/products/1133819>



Battery module (device with battery), VRLA-AGM, 48 V DC, 7 Ah

Accessories

PLT-SEC-T3-120-FM-UT - Type 3 surge protection device

2907918

<https://www.phoenixcontact.com/in/products/2907918>



Type 2/3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 120 V AC/DC

QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

QUINT-HP-COM/USB-SER - Interface card

1252055

<https://www.phoenixcontact.com/in/products/1252055>

USB/RS-232/RS-485 interface card for QUINT-HP-AC UPS



QUINT-HP-FAN - Fan

1252068

<https://www.phoenixcontact.com/in/products/1252068>

Replaceable fan module for QUINT-HP-AC UPS



QUINT-HP-UPS/120AC/2.5KVA/PT - Uninterruptible power supply



1136813

<https://www.phoenixcontact.com/in/products/1136813>

POWER MANAGEMENT SUITE - Configuration software

1252232

<https://www.phoenixcontact.com/in/products/1252232>

Configuration and management software



Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in