## SIEMENS

## Data sheet

## 3VA1140-4EF42-0AA0



circuit breaker 3VA1 IEC frame 160 breaking capacity class S Icu=36kA @ 415V 4-pole, line protection TM240, ATAM, In=40A overload protection Ir=28A...40A short-circuit protection Ii=5...10 x In N conductor unprotected nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	TM240
protection function of the overcurrent release	LI
number of poles	4
General technical data	
insulation voltage / rated value	800 V
operating voltage / at DC / rated value	600 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	10.8 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	9 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	6 300
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
communication function	No
<ul> <li>other measurement function</li> </ul>	No
Net Weight	1.184 kg
Current	
operational current	
• at 40 °C	40 A
● at 45 °C	40 A
• at 50 °C	40 A
• at 55 °C	39 A
• at 60 °C	39 A
● at 65 °C	38 A
• at 70 °C	37 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	S
maximum short-circuit current breaking capacity (lcu)	
• at 240 V	55 kA
● at 415 V	36 kA
• at 440 V	25 kA
● at 500 V	7 kA
• at 690 V	7 kA
operating short-circuit current breaking capacity (lcs)	

• at 240 V	
	55 kA
• at 415 V	36 kA
• at 440 V	25 kA
• at 500 V	5 kA
• at 690 V	5 kA
short-circuit current making capacity (Icm)	
• at 240 V	121 kA
• at 415 V	75.6 kA
• at 440 V	52.5 kA
• at 500 V	11.9 kA
• at 690 V	11.9 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with	
12t characteristic	
● minimum	28 A
• maximum	40 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	1s
• maximum	1 s
adjustable response value setting current (li) / for I-tripping	
• minimum	200 A
• maximum	400 A
adjustable setting current (InN) / for N-tripping	
• minimum	0 A
• maximum	0 A
design of the N-conductor protection	without
product function / grounding protection	No
Mechanical Design	
product component	
undervoltage release	No
voltage trigger	No
• trip indicator	No
height [in]	5.12 in
	100
height	130 mm
height width [in]	4 in
height width [in] width	4 in 101.6 mm
height width [in] width depth [in]	4 in 101.6 mm 2.76 in
height width [in] width depth [in] depth	4 in 101.6 mm
height width [in] width depth [in] depth Connections	4 in 101.6 mm 2.76 in 70 mm
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	4 in 101.6 mm 2.76 in 70 mm Front terminal
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar terminal connection / minimum         type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar terminal connection / minimum         type of connectable conductor cross-sections / for flat-bar terminal connection / maximum         design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar terminal connection / minimum         type of connectable conductor cross-sections / for flat-bar terminal connection / maximum         design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)         design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar         terminal connection / minimum         type of connectable conductor cross-sections / for flat-bar         terminal connection / maximum         design of the surface / of the connections / on the top of the         switch (N, 1, 3, 5)         design of the surface / of the connections / on the bottom of the         switch (N, 2, 4, 6)         Auxiliary circuit	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar         terminal connection / minimum         type of connectable conductor cross-sections / for flat-bar         terminal connection / maximum         design of the surface / of the connections / on the top of the         switch (N, 1, 3, 5)         design of the surface / of the connections / on the bottom of the         switch (N, 2, 4, 6)         Auxiliary circuit         number of CO contacts / for auxiliary contacts	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar         terminal connection / minimum         type of connectable conductor cross-sections / for flat-bar         terminal connection / maximum         design of the surface / of the connections / on the top of the         switch (N, 1, 3, 5)         design of the surface / of the connections / on the bottom of the         switch (N, 2, 4, 6)         Auxiliary circuit         number of CO contacts / for auxiliary contacts         Accessories         product extension / optional / motor drive	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar         terminal connection / minimum         type of connectable conductor cross-sections / for flat-bar         terminal connection / maximum         design of the surface / of the connections / on the top of the         switch (N, 1, 3, 5)         design of the surface / of the connections / on the bottom of the         switch (N, 2, 4, 6)         Auxiliary circuit         number of CO contacts / for auxiliary contacts         Accessories         product extension / optional / motor drive         Environmental conditions	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0 Yes
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar         terminal connection / minimum         type of connectable conductor cross-sections / for flat-bar         terminal connection / maximum         design of the surface / of the connections / on the top of the         switch (N, 1, 3, 5)         design of the surface / of the connections / on the bottom of the         switch (N, 2, 4, 6)         Auxiliary circuit         number of CO contacts / for auxiliary contacts         Accessories         product extension / optional / motor drive         Environmental conditions         protection class IP / on the front	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar         terminal connection / minimum         type of connectable conductor cross-sections / for flat-bar         terminal connection / maximum         design of the surface / of the connections / on the top of the         switch (N, 1, 3, 5)         design of the surface / of the connections / on the bottom of the         switch (N, 2, 4, 6)         Auxiliary circuit         number of CO contacts / for auxiliary contacts         Accessories         product extension / optional / motor drive         Environmental conditions         protection class IP / on the front         ambient temperature	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0 Ves
height         width [in]         width         depth [in]         depth         Connections         arrangement of electrical connectors / for main current circuit         type of electrical connection / for main current circuit         type of connectable conductor cross-sections / for flat-bar         terminal connection / minimum         type of connectable conductor cross-sections / for flat-bar         terminal connection / maximum         design of the surface / of the connections / on the top of the         switch (N, 1, 3, 5)         design of the surface / of the connections / on the bottom of the         switch (N, 2, 4, 6)         Auxiliary circuit         number of CO contacts / for auxiliary contacts         Accessories         product extension / optional / motor drive         Environmental conditions         protection class IP / on the front	4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0 Yes

during storage / minimum		-40	O°C		
during storage / maximum		80			
Environmental footprint					
Environmental Product Declaration(EPD)			S		
Global Warming Potential [CO2 eq] / total		19	190 kg		
Global Warming Potential [CO2 eq] / during manufacturing			i7 kg		
Global Warming Potential [CO2 eq] / during operation			186 kg		
global warming potential [CO2 eq] / after end of life		fe -0.1	-0.826 kg		
reference code / according to IEC 81346-2		Q			
Approvals / Certificates	;				
General Product App	roval				
<u>Confirmation</u>		UDE VDE	<u>Miscellaneous</u>	KC	EAC
EMC	Declaration of Confor	mity	Test Certificates		
RCM	CE EG-Konf.	UK CA	<u>Type Test Certific-</u> ates/Test Report	<u>Miscellaneous</u>	Special Test Certific- ate
Marine / Shipping					
ABS	B UREAU VERITAS		Hoyds Register uis	RMRS	<u>CCS / China Classific-</u> ation Society
other			Environment		
<u>Miscellaneous</u>	Confirmation	<u>Miscellaneous</u>	Environmental Con- firmations		

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1140-4EF42-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA1140-4EF42-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA1140-4EF42-0AA0


CAx-Online-Generator


http://www.siemens.com/cax

Tender specifications


http://www.siemens.com/specifications



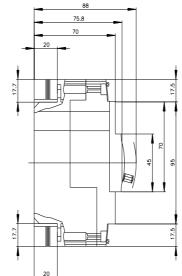



 12.7

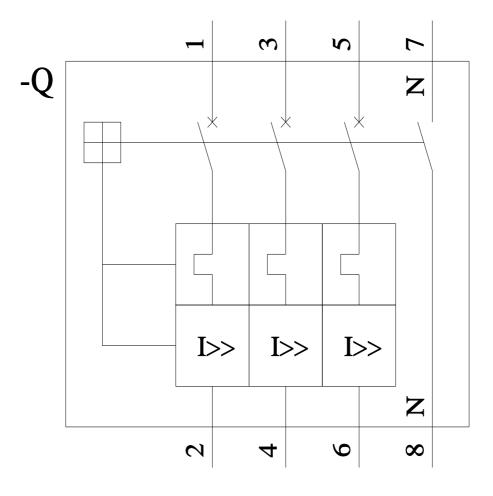

11/3/2023 🖸