

Product data sheet

Miniature connectors




Product description **Bayonet Male angled connector, Contacts: 8, 2.5-4.0 mm, unshielded, solder, IP67**

Area **Bayonet NCC**
 Series **770**
 Part no. **99 0773 000 08**


Illustration



Scale drawing



Contact arrangement (Plug-in side)

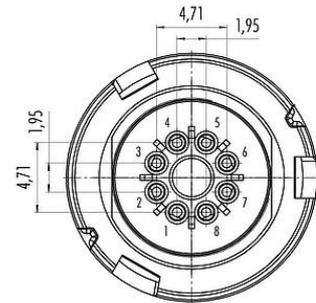

You can find the assembly instructions on the next page.

Technical data

General features

Part no.	99 0773 000 08
Connector design	Male angled connector
Version	Connector pin straight
Connector locking system	Bayonet
Termination	solder
Degree of protection	IP67
Connection cross-section	0.25 mm ² / AWG 24
Cable outlet	2.5-4.0 mm
Temperature range from/to	-25 °C / 85 °C
Mechanical operation	> 5000 Mating cycles
Weight (g)	13.09
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	175 V
Rated impulse voltage	1750 V
Rated current	2.0 A
Insulation resistance	≥ 10 ¹⁰ Ω
Pollution degree	2
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

Product data sheet

Miniature connectors



Product description **Bayonet Male angled connector, Contacts: 8, 2.5-4.0 mm, unshielded, solder, IP67**

Area **Bayonet NCC**
 Series **770**
 Part no. **99 0773 000 08**

Material


Housing material	PA
Contact body material	PA (UL94 HB)
Contact material	CuZn (brass)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	9607ab5d-63b0-4e32-935d-905d4a4e0146

Classifications

eCl@ss 11.1	27-44-01-02
ETIM 9.0	EC002635

Assembly instructions

1. Bead angled housing, seal, pinch ring and pressing screw to cable.
2. Dismantle cable to 15 mm length.
3. Strip and connect single wires.
4. Insert assembled bayonet adapter/male insert into the angled housing and screw it with the threaded ring.
5. Push seal and pinch ring into the angled housing and tighten it with the pressing screw.

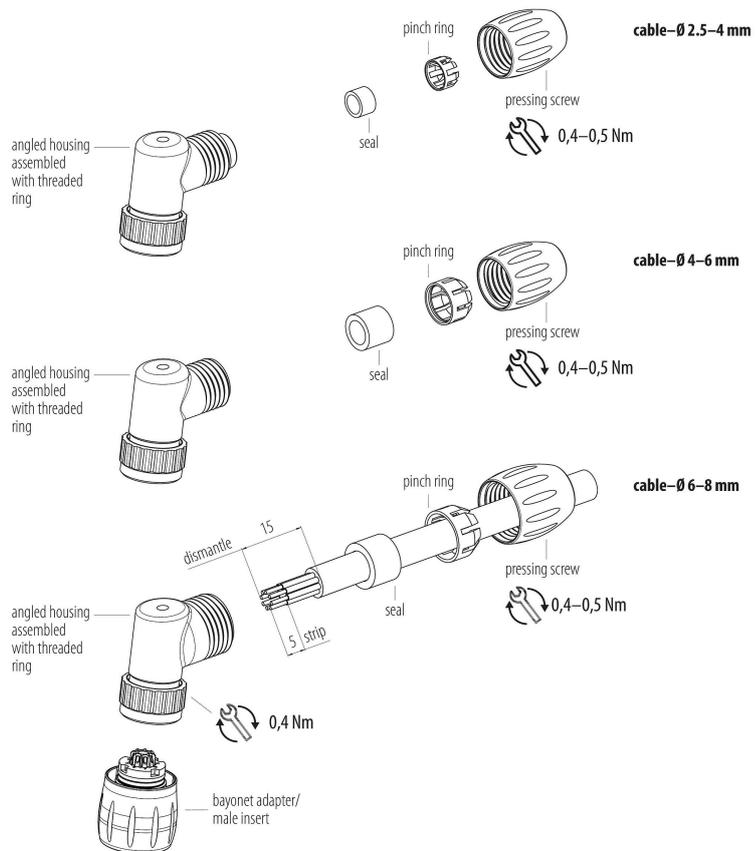

Product description	Bayonet Male angled connector, Contacts: 8, 2.5-4.0 mm, unshielded, solder, IP67
Area	Bayonet NCC
Series	770
Part no.	99 0773 000 08

General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".