



Industrial RJ45 Mag Jack

TE Internal #: 5-2337994-3

RJ45 with Integrated Magnetics Connector, Multiple Ports, 1 x 2, Jack, Shielded, Cat 5, Inverted - Latch Up, 8 Position, Industrial RJ45 Mag Jack

[View on TE.com >](#)

Connectors > Modular Jacks & Plugs > RJ45 Connectors



Modular Jack & Plug Interface Type: **RJ45 with Integrated Magnetics**

Port Configuration: **Multiple Ports**

Port Matrix Configuration: **1 x 2**

Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**

Connector Contact Density: **Standard**

Features

Product Type Features

Modular Jack & Plug Interface Type	RJ45 with Integrated Magnetics
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Grounding Options	PCB and Panel Ground
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of PCB Ground Tabs	2
Panel Ground Location	Top and Side
Number of Panel Ground Tabs	7
Multiple Port Configuration	Ganged
Port Configuration	Multiple Ports
Port Matrix Configuration	1 x 2
Connector Contact Density	Standard
Number of Positions	8



Number of Loaded Positions	8
PCB Mount Orientation	Right Angle

Signal Characteristics

Data Rate	10 Mb/s, 100 Mb/s
-----------	-------------------

Body Features

LED Color (Bottom Left)	None
Insulator Material	LCP
LED Color (Bottom Right)	None
Shield Plating Material	Nickel
Shield Plating Finish	Matte
Shield Material	Brass
PCB Retention Feature Material	LCP
LED Color (Top Right)	Yellow
LED Color (Top Left)	Green
PCB Ground Tab Location	3.05 mm[.12 in]
Modular Jack Latch Orientation	Inverted - Latch Up
Connector Profile	Standard

Contact Features

Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

PCB Mount Retention Type	Boardlock
--------------------------	-----------

Housing Features

Mating Entry Location	Side
Housing Color	Black
Housing Material	LCP (Liquid Crystal Polymer)



Dimensions

Connector Height	13.5 mm[.531 in]
------------------	------------------

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Indicator Type	LED
Shielded	Yes

Industry Standards

UL Flammability Rating	UL 94V-0
Performance Category	Cat 5

Packaging Features

Packaging Quantity	30
Packaging Method	Tray

Other

Shield Panel Ground Type	Shield has bottom panel grounds.
--------------------------	----------------------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




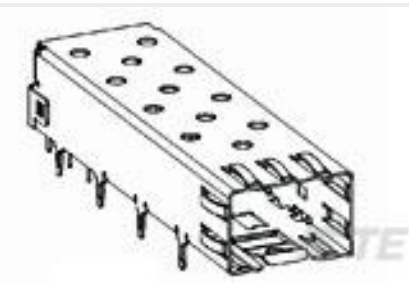
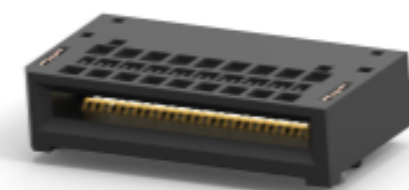
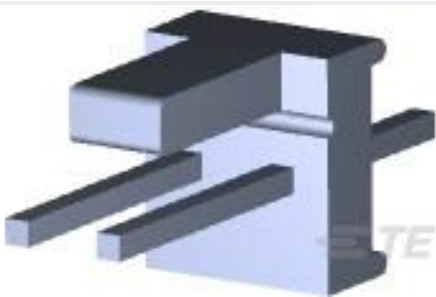
TE Part # 1987236-1
RJ45 CONNECTOR IP20 45 DEG., INDUSTRIAL

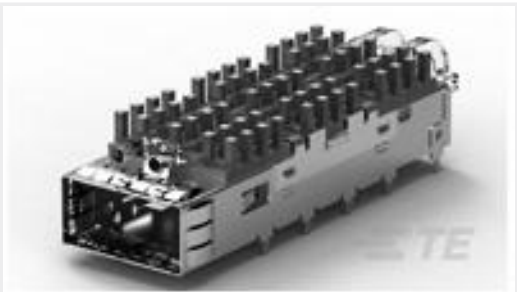
Also in the Series | Industrial RJ45 Mag Jack



RJ45 Connectors(102)

Customers Also Bought

 TE Part #2459600-1 SFP112G STACKED RECEPTACLE CONNECTOR	 TE Part #2227302-1 CAGE ASSY, PRESS FIT, SFP	 TE Part #1825910-6 FSM4JH=6MM TACT SWITCH, HIGH TEMP	 TE Part #2327672-1 RECEPT ASSY, RA, 56 POS, SLIVER 2.0
 TE Part #640454-2 02P MTA100 HDR ASSY SQ STR POL	 TE Part #9-1625867-5 RP 1J 0.166W 60R4 0.1% 25PPM 1K RL	 TE Part #1-2199230-6 M.2 0.5PITCH 4.2H KEY M 30U AU	 TE Part #1-2201197-0 0.4 STACKING CONN H0.98 REC ASSEMBLY



TE Part #1888971-1
[Cage Assy Thru Bezel/LP San, QSFP](#)



TE Part #2289129-3
[ZQSFP+ CAGE& CONN 2X2, EMI SPRING, 4 LP](#)

Documents

Product Drawings

[RJ45 JACK MAG. POE 10/100 LED 1X2 INV.](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_5-2337994-3_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-2337994-3_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5-2337994-3_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[ETHERNET JACKS WITH INTEGRATED MAGNETICS AND PoE](#)

English

Product Specifications

[Application Specification](#)

English