


**COAXIAL CONNECTOR, NEX10, 50 Ohm, Straight cable plug (male)**

11\_NEX10-50-0-X150/003\_-

**Properties**

- IEC 61169-54 / Connector for use in SPJ/CPJ Assembly
- Applicable up to 6 GHz
- Excellent PIM and RL independent of torque
- Screwed coupling mechanism for sturdy and reliable connection

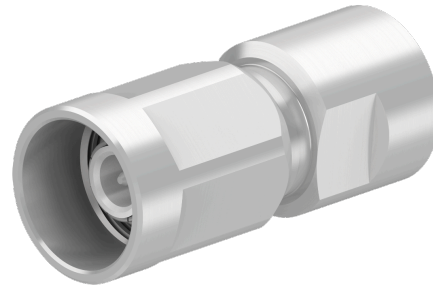

Product configuration		
Interface type	Gender	Standard
NEX10	plug	IEC 61169-71

Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	Silver Plating
Outer conductor	Bronze	Silver Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PTFE (Polytetrafluoroethylene)	
Coupling nut	Brass	SUCOPLATE (R) Plating
Gasket	VMQ (Silicone rubber)	

Electrical data	
Impedance	50 Ω
Interface frequency	6 GHz

Mechanical data	
Cable entry centre contact	plugged
Cable entry outer contact	clamped

Environmental data	
Operation temperature	-55 °C ... 125 °C

**COAXIAL CONNECTOR, NEX10, 50 Ohm, Straight cable plug (male)**

11\_NEX10-50-0-X150/003\_-

Material compliance			
Item number	Directive / Regulation	Rating	Exemptions / Details
85099127	RoHS 2011/65/EU and (EU) 2015/863	Compliant with exemption	6c
	REACH 1907/2006 Article 33 SVHC	Contains one or more SVHC >0,1%	CAS: 7439-92-1 Lead

Ordering Information Table		
Item number	Item description	Packaging type
85099127	11_NEX10-50-0-X150/003_-E	Single

Suitable cables	
Cable group	Z1 - M10x1/SPJ-CPJ
Suitable cables	SPJ_SM141L_PCC
	SPJ_SM222L_PCC
	SPJ_SM122L_PCC
Additional cables	SPJ/CPJ assemblies

Additional Information	
Remarks	Only in combination with SPJ/PCC assemblies
Only as assembly	No

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.  
DOCUMENT PIM-P54531 / Date of publication: 14.07.2025 / uncontrolled copy