

Monitoring relay- Motor temperature monitoring

Status: **Available** Data sheet created: **16.06.2025**

Item Number: 2100102 - Serie: Veo - EAN: 9008662017818



- ✓ Monitoring relays VEO series
- ✓ Temperature monitoring (PTC)
- ✓ Short circuit detection
- ✓ Supply voltage 24-48 V ACDC
- ✓ 1 NO contact
- ✓ width 22,5 mm
- ✓ compact industrial design

Description

Compact and reliable measurement of voltage, current, cosine phi, temperature or levels.


General information

Short description	Motor temperature monitoring, 1 NO contact, 24-48V AC/DC
Item Number	2100102
EAN	9008662017818
Main category	Monitoring Relays
Series	Veo
Type	V2TF01 24-48V AC/DC
Design	Compact industrial design
Supply	24-48V AC/DC
Dimensions	22.5 x 67 x 76 mm

Functions and measurands

Amount of functions

1

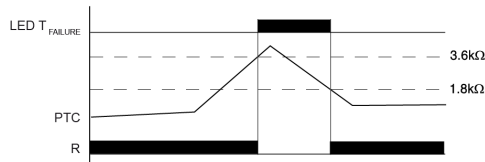

Temperature monitoring (Temp)

If the PTC summation resistance is less than 3.6 k Ω (normal temperature of the motor) when the supply voltage is applied, the output relay R is energized. If the total resistance rises above 3.6 k Ω , the output relay R drops out. The output relay R picks up again when the PTC summation resistance has fallen below 1.6 k Ω again.

Time ranges

Number Of Areas

1

Setting range

Time ranges

Switch-on delay	fix ca. 65 ms
Shutter delay	-

Indicators

Supply/time lapse 1

Green LED U ON: Supply voltage applied

Error / monitoring function

Temperature monitoring LED TFailure (red) on Display overtemperature

Mechanical design

Housing material	PA 66, self-extinguishing plastic, class V-0
Housing - protection degree	IP40
Mounting	Profile rail TS 35 according to EN60715
Terminals/connections	Screw terminal
Terminals - protection degree	IP20
Mounting position	any
Stripping length	8 mm
Max. Tightening Torque	1 Nm

Supply circuit

Terminals/connections	A1-A2
Supply voltage d.c.	24 ... 48 V
Supply voltage tolerance d.c.	-15% ... +10%
Rated consumption d.c.	48 V d.c. typ. 0,409 W
Supply voltage a.c.	24 ... 48 V
Supply voltage tolerance a.c.	-15% ... +10%
Rated frequency [Hz]	50 / 60 Hz or d.c.
Tolerance of the Frequency	$\pm 10\%$
Rated consumption a.c.	48 V a.c. typ. 0,431 W / 0,777 VA
Duty cycle	100 %
Backup power time	< 40 ms
Recovery time	100 ms



Output circuit

Type	Relay
Contact 1	1 normally open contact
Terminals 1	13-14
Maximum switching voltage	400 V a.c.
Rated voltage	250 V (IEC 60947-5-1)
Rated current 1	AC-1 8 A / 250 V
Rated current 3	DC-12 8 A / 30 V
Rated current 2	AC-15 1,5 A / 240 V (B300)
Rated current 4	DC-13 0,27 A / 250 V (Q300)
Contacts material	AgNi
Fuse Protection	8 A quick
Mechanical life	30 x 10 ⁶ Switching cycles
Electrical life	100 x 10 ³ Switching cycles (AC-1)
Switching frequency	1200/min without load
Switching frequency 2	6/min with load
Rated surge voltage	1200/min ohne Last
Overvoltage category	III (IEC 60947-5-1)

Measuring circuit

Measurand	Temperature
-----------	-------------

Accuracy

Base accuracy	± 10 %
Temperature influence	< 0,05 % / °C

Measuring circuit - temperature

Measuring input	T1-T2
Initial resistance	≤ 1,5 kΩ
Response value (relay in off-position)	≥ 3,6 kΩ
Release value (relay in on-position)	≤ 1,6 kΩ
Disconnection (short circuit thermistor)	yes, response value ≤ 20 Ω
Maximum open loop voltage	3,6 V
Reset	Autoreset
Sensor current	max. 0,25 mA

Ambient conditions and general specifications

Ambient temperature IEC	-25 ... +60°C
Storage temperature	-40 ... +70°C
Relative humidity	5 ... 95 %
Vibration resistance	EN 60947-1 2 ... 13,2 Hz: 1 mm; 13,2 ... 100 Hz: 7 m/s ²
Shock resistance	EN 60947-1 150 m/s ² 11 ms
Pollution degree	2, pollution level can be increased by installation in suitable enclosures (according to IEC 60947-5-1)
Installation altitude	Up to 2000 m above sea level

Logistics



Minimum Quantity	1
Tariff Number	85364900
EAN	9008662017818
Country of Origin	AT
Product Weight (g)	83

CAD Files

STEP_V2_en.STEP	Download file
-----------------	-------------------------------



Media & drawings

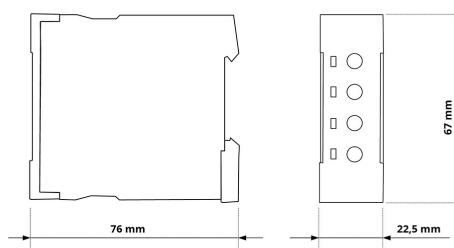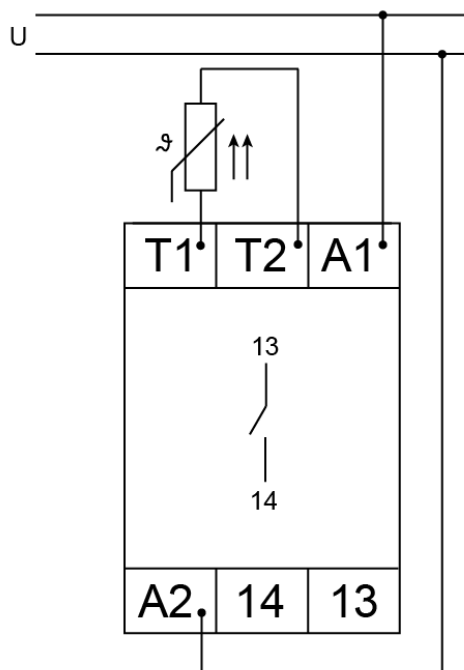

Tele Haase Steuergeräte Ges.m.b.H

Vorarlberger Allee 38

1230 Vienna

Austria

CALL US



+43 / 1 / 614 74 - 0

ONLINE SUPPORT



support@tele-haase.at

Changes and errors excepted