SIEMENS


Data sheet


3NA6824-6



LV HRC fuse element, NH00, In: 80 A, gG, Un AC: 690 V, Un DC: 250 V, Combined indicator, Insulated grip lugs


Model		
product brand name	SENTRON	
product designation	LV HRC fuse link	
design of the product	With blade contacts	
design of an identification indicator	Combination alarms	
design of the switching contact	Non-corroding, silver-plated	
design of the fuse link	LV HRC fuse link	
General technical data		
size of fuse system according to EN 60269-1	NH00	
operating class of the fuse link	gG	
mounting type	insulated grip lugs	
type of voltage of the operating voltage	AC/DC	
supply voltage		
 at AC rated value 	690 V	
• at DC	250 V	
Protection class		
protection class IP	IP20, with connected conductors	
Switching capacity		
switching capacity current		
 at DC according to IEC 60947-2 rated value 	25 kA	
 according to IEC 60947-2 rated value 	120 kA	
Dissipation		
power loss [W]	6.94 W	
power loss [W] for rated value of the current at AC in hot operating state per pole	6.94 W	
Mechanical Design		
width of the enclosure	30 mm	
mounting position	Any, preferably vertical	
net weight	200 g	
Environmental conditions		
ambient temperature during operation		
• minimum	-5 °C	
• maximum	40 °C	
environmental category	-20 to +50 at 95% relative humidity	
environmental category during storage	90% at 20°C	
Certificates		
reference code according to IEC 81346-2	FC	
Approvals Certificates		
General Product Approval	Declaration of Conformity	Test Certificates

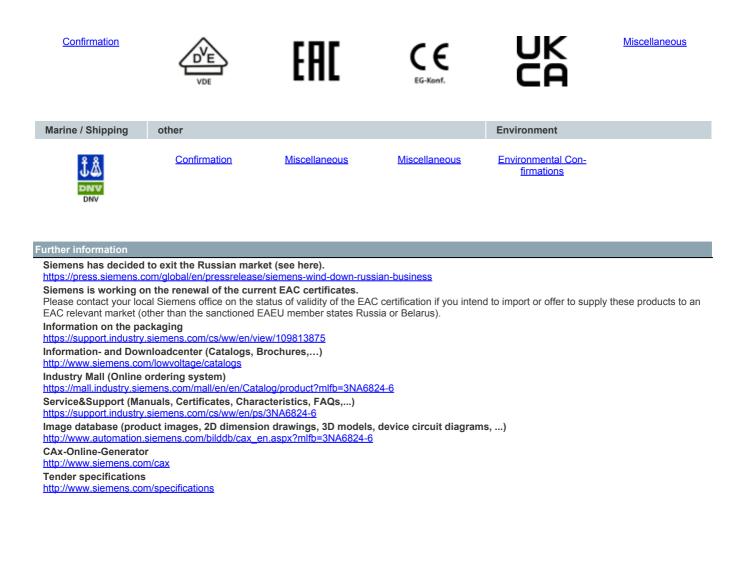





+

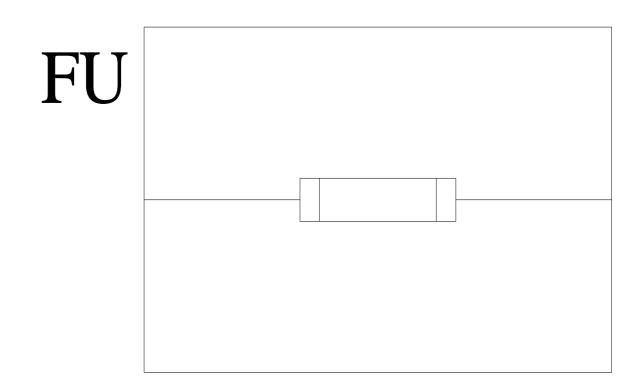

last modified:

2/14/2023 🖸