

Fair-Rite Products Corp. PO Box J,One Commercial Row, Wallkill, NY 12589-0288 Phone: (888) 324-7748 www.fair-rite.com


Fair-Rite Product's Catalog Part Data Sheet, 2631250202 Printed: 2009-01-16














Part Number: 2631250202

Frequency Range: Lower & Broadband Frequencies 1-300 MHz (31 material)

Description: 31 SHIELD BEAD

Application: Suppression Components

Where Used: Cable Component

Part Type: Round Cable EMI Suppression Cores

Mechanical Specifications

Weight: 2.900 (g)

Part Type Information

Fair-Rite offers a broad selection of ferrite EMI suppression cable cores in several materials with guaranteed minimum impedance specifications.

- -All cable cores have been burnished to remove the sharp edges.
- -The column 'H' (Oe) gives for each cable core the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application, is this value of 'H' times the actual NI (ampere-turns) product. For the effect of the dc bias on the impedance of the core material, see the figures 18-23 in the application note 'How to choose Ferrite Components for EMI Suppression'.
- -Suppression cable cores are controlled for impedances only. The impedances listed are typical values. Minimum impedance values are specified for the + marked frequencies. The minimum guaranteed impedance is the listed impedance less 20%.
- -Single turn impedance tests for 31, 43 and 46 material cores are performed on the 4193A Vector Impedance Meter. The 61 material parts are tested on the 4191A RF Impedance Analyzer. Cores are tested with the shortest Practical wire length.
- -Performance curves for individual components can be viewed by clicking on the part number in the chart.
- -For smaller suppression parts, refer to the EMI Suppression Bead section of our catalog.
- -For any cable suppression core not listed here, feel free to contact our customer service group for availability and pricing.
- -The 'C' dimension, the core length, can be modified to suit specific applications.
- -Our Expanded Cable and Suppressor Kit (part number 0199000005) Contains a selection of these suppression cores.
- -Explanation of Part Numbers: Digits 1 & 2 = product class, 3 & 4 material grade and last digit 2 = burnished.



Fair-Rite Products Corp. PO Box J.One Commercial Row, Wallkill, NY 12589-0288 Phone: (888) 324-7748 www.fair-rite.com

Fair-Rite Product's Catalog Part Data Sheet, 2631250202 Printed: 2009-01-16









Mechanical Specifications

Dim	mm	mm	nominal	inch
		tol	inch	misc.
Α	6.35	±0.15	0.250	-
В	2.95	+0.45	0.125	-
С	25.40	±0.75	1.000	-
D	•	ı	1	-
Е	•	ı	1	-
F	•	ı	1	-
G	•	ı	1	-
Н	-	-	-	-
J	-	-	-	-
K	-	-	-	-

Electrical Specifications

Typical Impedance (Ω)			
1 MHz	27		
5 MHz	70		
10 MHz+	90		
25 MHz+	138		
100 MHz+	230		
250 MHz	240		

Electrical Properties		
H(Oe) .91		

Land Patterns

V	W	Х	Υ	Z
-	-	-	-	-
-	-	-	-	-

Winding Information

Turns	Wire	1st Wire	2nd Wire
Tested	Size	Length	Length
-	-	-	-

Reel Information

Tape Width	Pitch	Parts 7 "	Parts 13 "	Parts 14 "
mm	mm	Reel	Reel	Reel
-	-	-	-	-

Package Size

Pkg Size
-
(-)

Connector Plate

# Holes	# Rows
-	-

Legend

+ Test frequency

Preferred parts, the suggested choice for new designs, have shorter lead times and are more readily available.

The column H(Oe) gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of H times the actual NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note How to choose Ferrite Components for EMI Suppression.

A ½ turn is defined as a single pass through a hole.

∠I/A - Core Constant

A_e: Effective Cross-Sectional Area

 A_{l} - Inductance Factor $\left(\frac{L}{N^{2}}\right)$

I e: Effective Path Length

Ve: Effective Core Volume

NI - Value of dc Ampere-turns

N/AWG - Number of Turns/Wire Size for Test Coil



Fair-Rite Product's Catalog Part Data Sheet, 2631250202 Printed: 2009-01-16









Ferrite Material Constants

Specific Heat 0.25 cal/g/°C

Thermal Conductivity 10x10⁻³ cal/sec/cm/°C

Coefficient of Linear Expansion 8 - 10x10⁻⁶/°C

Tensile Strength 4.9 kgf/mm²

Compressive Strength 42 kgf/mm²

Young's Modulus 15x10³ kgf/mm²

Specific Gravity $\approx 4.7 \text{ g/cm}^3$

The above quoted properties are typical for Fair-Rite MnZn and NiZn ferrites.

See next page for further material specifications.



Fair-Rite Products Corp. PO Box J,One Commercial Row, Wallkill, NY 12589-0288 Phone: (888) 324-7748 www.fair-rite.com

A MnZn ferrite designed specifically for EMI suppression applications from as low as 1 MHz up to 500 MHz. This material does not have the dimensional resonance limitations associated with conventional MnZn ferrite materials.

Round cable EMI suppression cores, round cable snap-its, flat cable EMI suppression cores, and flat cable snap-its are all available in 31 material.

Fair-Rite Product's Catalog Part Data Sheet, 2631250202

Printed: 2009-01-16










31 Material Characteristics:


Property	Unit	Symbol	Value
Initial Permeability © B < 10 gauss		μ_{i}	1500
Flux Density	gauss	В	3400
@ Field Strength	oersted	н	5
Residual Flux Density	gauss	B,	2500
Coercive Force	oersted	H _c	0.35
Loss Factor	10-6	tan δ/μ,	20
@ Frequency	MHz		0.1
Temperature Coefficient of Initial Permeability (20 -70°C)	%/°C		1.6
Curie Temperature	°C	T _o	>130
Resistivity	Ωcm	ρ	3x10 ³

Complex Permeability vs. Frequency




Measured on a 17/10/6mm toroid at 25°C using the HP 4284A and the HP 4291A.

Initial Permeability vs. Temperature




Measured on a 17/10/6mm toroid at 100kHz.

Percent of Original Impedance vs. Temperature



Measured on a 2631000301 using the HP4291A.

Hysteresis Loop



Measured on a 17/10/6mm toroid at 10kHz.



Fair-Rite Products Corp. PO Box J,One Commercial Row, Wallkill, NY 12589-0288 Phone: (888) 324-7748 www.fair-rite.com


Fair-Rite Product's Catalog Part Data Sheet, 2631250202 Printed: 2009-01-16










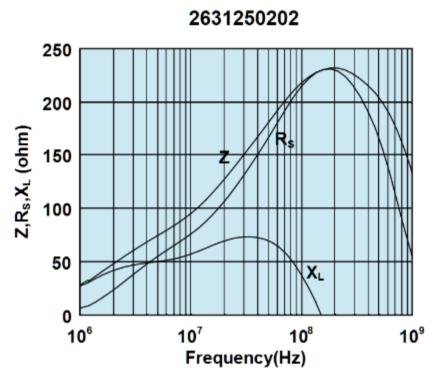

Impedance, reactance, and resistance vs. frequency.

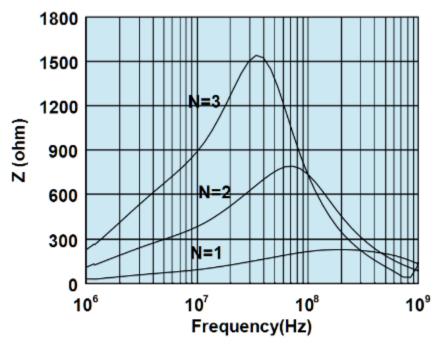

Impedance vs. frequency with one, two, and three turns.