

# NCP57302, NCV57302

## 3.0 A, Very Low-Dropout (VLDO) Fast Transient Response Regulator

The NCP57302 is a high precision, very low dropout (VLDO), low minimum input voltage and low ground current positive voltage regulator that is capable of providing an output current in excess of 3.0 A with a typical dropout voltage of 315 mV at 3.0 A load current and input voltage from 1.8 V and up. The device is stable with ceramic output capacitors. The device can withstand up to 18 V max input voltage.

Internal protection features consist of output current limiting, built-in thermal shutdown and reverse output current protection. Logic level enable pin is available. The NCP57302 is an adjustable voltage device and is available in D2PAK–5 package.

### Features

- Output Current in Excess of 3.0 A
- Minimum Operating Input Voltage 1.8 V for Full 3 A Output Current
- 315 mV Typical Dropout Voltage at 3.0 A
- Adjustable Output Voltage Range from 1.24 V to 13 V
- Low Ground Current
- Fast Transient Response
- Stable with Ceramic Output Capacitor
- Logic Compatible Enable Pin
- Current Limit, Reverse Current and Thermal Shutdown Protection
- Operation up to 13.5 V Input Voltage
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q100 Qualified and PPAP Capable
- These are Pb–Free Devices

### Applications


- Consumer and Industrial Equipment Point of Regulation
- Servers and Networking Equipment
- FPGA, DSP and Logic Power supplies
- Switching Power Supply Post Regulation
- Battery Chargers
- Functional Replacement for Industry Standard MIC29300, MIC39300, MIC37300 with Improved Minimum Input Voltage Specification




**ON Semiconductor®**

<http://onsemi.com>

### MARKING DIAGRAMS



**D<sup>2</sup>PAK  
CASE 936A**



|    |                     |
|----|---------------------|
| y  | = P (NCP), V (NCV)  |
| A  | = Assembly Location |
| WL | = Wafer Lot         |
| Y  | = Year              |
| WW | = Work Week         |
| G  | = Pb–Free Package   |

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 9 of this data sheet.

# NCP57302, NCV57302

## TYPICAL APPLICATIONS

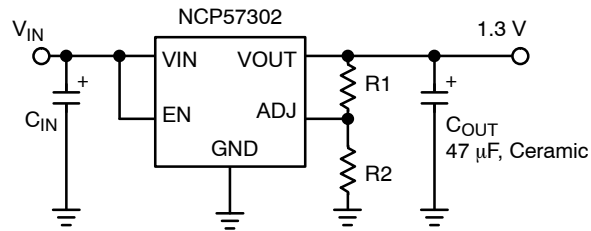


Figure 1. Adjustable Regulator

## PIN FUNCTION DESCRIPTION

| Pin Number | Pin Name | Pin Function                                                                                  |
|------------|----------|-----------------------------------------------------------------------------------------------|
| 1          | EN       | Enable Input: CMOS and TTL logic compatible. Logic high = enable; Logic low = shutdown.       |
| 2          | VIN      | Input voltage which supplies both the internal circuitry and the current to the output load   |
| 3          | GND      | Ground                                                                                        |
| TAB        | TAB      | TAB is connected to ground.                                                                   |
| 4          | VOUT     | Linear Regulator Output.                                                                      |
| 5          | ADJ      | Adjustable Regulator Feedback Input. Connect to output voltage resistor divider central node. |

## ABSOLUTE MAXIMUM RATINGS

| Symbol                             | Rating                                                                                               | Value                             | Unit        |
|------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------|-------------|
| V <sub>IN</sub>                    | Supply Voltage                                                                                       | 0 to 18                           | V           |
| V <sub>EN</sub>                    | Enable Input Voltage                                                                                 | 0 to 18                           | V           |
| V <sub>OUT</sub> – V <sub>IN</sub> | Reverse V <sub>OUT</sub> – V <sub>IN</sub> Voltage (EN = Shutdown or V <sub>IN</sub> = 0 V) (Note 1) | 0 to 6.5                          | V           |
| P <sub>D</sub>                     | Power Dissipation (Notes 2 and 3)                                                                    | Internally Limited                |             |
| T <sub>J</sub>                     | Junction Temperature                                                                                 | –40 ≤ T <sub>J</sub> ≤ +125       | °C          |
| T <sub>S</sub>                     | Storage Temperature                                                                                  | –65 ≤ T <sub>J</sub> ≤ +150       | °C          |
|                                    | ESD Rating (Notes 4 and 5)                                                                           | Human Body Model<br>Machine Model | 2000<br>200 |
|                                    |                                                                                                      |                                   | V           |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

NOTE: All voltages are referenced to GND pin unless otherwise noted.

- The ENABLE pin input voltage must be ≤ 0.8 V or V<sub>IN</sub> must be connected to ground potential.
- $P_{D(max)} = (T_{J(max)} - T_A) / R_{\theta JA}$ , where R<sub>θJA</sub> depends upon the printed circuit board layout.
- This protection is not guaranteed outside the Recommended Operating Conditions.
- Devices are ESD sensitive. Handling precautions recommended.
- This device series incorporates ESD protection and is tested by the following methods:  
ESD Human Body Model (HBM) tested per AEC – Q100 – 002 (EIA/JESD22 – A114C)  
ESD Machine Model (MM) tested per AEC – Q100 – 003 (EIA/JESD22 – A115C)  
This device contains latch – up protection and exceeds 100 mA per JEDEC Standard JESD78.

## RECOMMENDED OPERATING CONDITIONS (Note 6)

| Symbol          | Rating               | Value                       | Unit |
|-----------------|----------------------|-----------------------------|------|
| V <sub>IN</sub> | Supply Voltage       | 1.8 to 13.5                 | V    |
| V <sub>EN</sub> | Enable Input Voltage | 0 to 13.5                   | V    |
| T <sub>J</sub>  | Junction Temperature | –40 ≤ T <sub>J</sub> ≤ +125 | °C   |

- The device is not guaranteed to function outside it's Recommended operating conditions.

# NCP57302, NCV57302

## ELECTRICAL CHARACTERISTICS

$T_J = 25^\circ\text{C}$  with  $V_{IN} = V_{OUT\text{ nominal}} + 0.6\text{ V}$ ;  $V_{EN} = V_{IN}$ ;  $I_L = 10\text{ mA}$ ; bold values indicate  $-40^\circ\text{C} < T_J < +125^\circ\text{C}$ , unless noted. (Note 7)

| Parameter                                   | Conditions                                                                                                                 | Min                   | Typ   | Max                   | Unit          |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|-----------------------|-------|-----------------------|---------------|
| Output Voltage Accuracy                     | $I_L = 10\text{ mA}$                                                                                                       | -1.5                  |       | +1.5                  | %             |
|                                             | $10\text{ mA} < I_{OUT} < 3\text{ A}$ , $V_{OUT\text{ nominal}} + 0.6\text{ V} \leq V_{IN} \leq 13.5\text{ V}$             | <b>-2.5</b>           |       | <b>+2.5</b>           | %             |
| Output Voltage Line Regulation              | $V_{IN} = V_{OUT\text{ nominal}} + 0.6\text{ V}$ to $13.5\text{ V}$ ; $I_L = 10\text{ mA}$                                 |                       | 0.02  | 0.5                   | %             |
| Output Voltage Load Regulation              | $I_L = 10\text{ mA}$ to $3\text{ A}$                                                                                       |                       | 0.2   | 1                     | %             |
| $V_{IN} - V_{OUT}$ Dropout Voltage (Note 8) | $I_L = 1.0\text{ A}$ (Note 10)                                                                                             |                       | 182   | <b>295</b>            | mV            |
|                                             | $I_L = 1.5\text{ A}$                                                                                                       |                       | 220   | <b>350</b>            | mV            |
|                                             | $I_L = 2.0\text{ A}$ (Note 10)                                                                                             |                       | 250   | <b>410</b>            | mV            |
|                                             | $I_L = 3.0\text{ A}$                                                                                                       |                       | 315   | <b>520</b>            | mV            |
| Ground Pin Current (Note 9)                 | $I_L = 3.0\text{ A}$                                                                                                       |                       | 60    | 90<br><b>120</b>      | mA            |
| Ground Pin Current in Shutdown              | $V_{EN} \leq 0.5\text{ V}$                                                                                                 |                       | 1.0   | 5                     | $\mu\text{A}$ |
| Overload Protection Current Limit           | $V_{OUT} = 0\text{ V}$                                                                                                     |                       | 3.5   | <b>5</b>              | A             |
| Start-up Time                               | $V_{EN} = V_{IN}$ , $V_{OUT\text{ nominal}} = 2.5\text{ V}$ , $I_{OUT} = 10\text{ mA}$ , $C_{OUT} = 47\text{ }\mu\text{F}$ |                       | 100   | 500                   | $\mu\text{s}$ |
| Reference Voltage                           |                                                                                                                            | 1.221<br><b>1.209</b> | 1.240 | 1.259<br><b>1.271</b> | V             |
| Adjust Pin Bias Current                     |                                                                                                                            |                       | 100   | 200<br><b>350</b>     | nA            |

## ENABLE INPUT

|                            |                                                              |            |    |                 |               |
|----------------------------|--------------------------------------------------------------|------------|----|-----------------|---------------|
| Enable Input Signal Levels | Regulator enable                                             | <b>1.4</b> |    |                 | V             |
|                            | Regulator shutdown                                           |            |    | <b>0.8</b>      | V             |
| Enable pin Input Current   | $V_{EN} \leq 0.8\text{ V}$ (Regulator shutdown)              |            |    | 2<br><b>4</b>   | $\mu\text{A}$ |
|                            | $6.5\text{ V} > V_{EN} \geq 1.4\text{ V}$ (Regulator enable) |            | 15 | 30<br><b>40</b> | $\mu\text{A}$ |

7.  $V_{OUT\text{ nominal}}$  can be set by external resistor divider in the application. Tested for  $V_{OUT\text{ nominal}} = 1.240\text{ V}$  unless noted.

8.  $V_{DO} = V_{IN} - V_{OUT}$  when  $V_{OUT}$  decreases to 98% of its nominal output voltage with  $V_{IN} = V_{OUT} + 1\text{ V}$ . Tested for  $V_{OUT\text{ nominal}} = 2.5\text{ V}$ .

9.  $I_{IN} = I_{GND} + I_{OUT}$ .

10. Guaranteed by design.

| Package                   | Conditions / PCB Footprint                                   | Thermal Resistance                    |
|---------------------------|--------------------------------------------------------------|---------------------------------------|
| D2PAK-5, Junction-to-Case |                                                              | $R_{\theta JC} = 2.1^\circ\text{C/W}$ |
| D2PAK-5, Junction-to-Air  | PCB with $100\text{ mm}^2$ 2.0 oz Copper Heat Spreading Area | $R_{\theta JA} = 52^\circ\text{C/W}$  |

# TYPICAL CHARACTERISTICS

$T_J = 25^\circ\text{C}$  if not otherwise noted

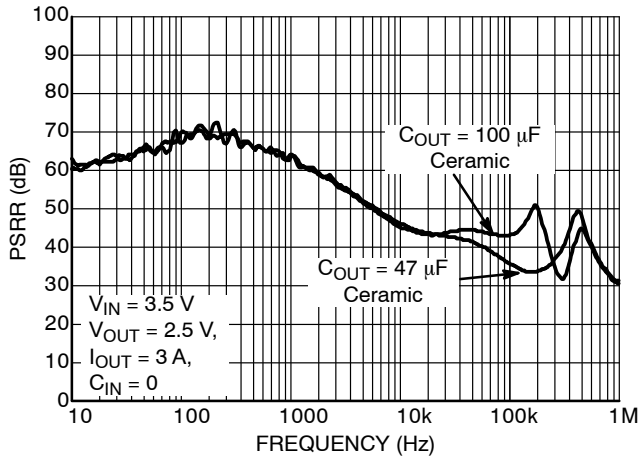


Figure 2. Power Supply Rejection Ratio

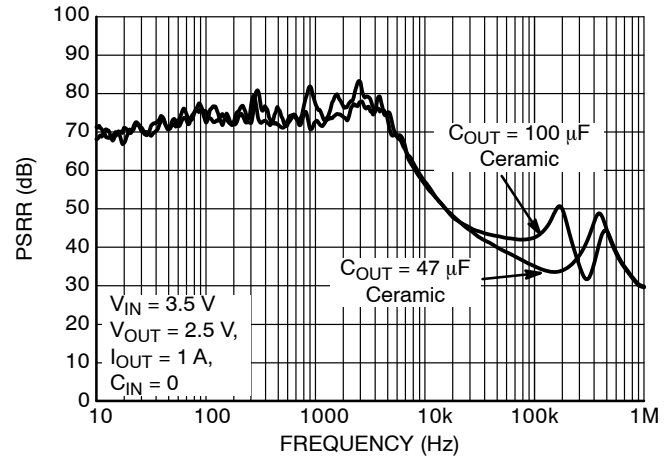


Figure 3. Power Supply Rejection Ratio

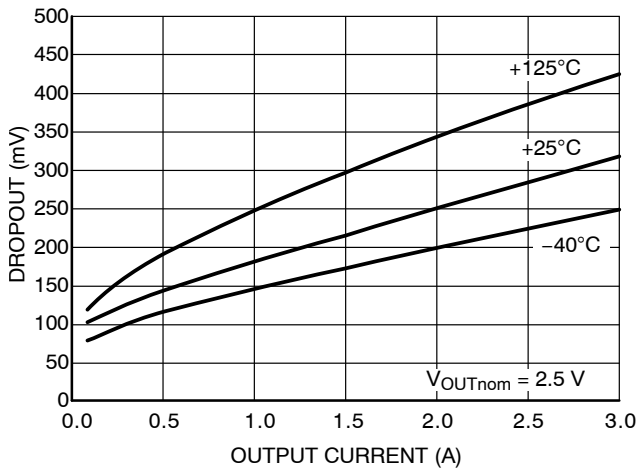


Figure 4. Dropout Voltage vs. Output Current

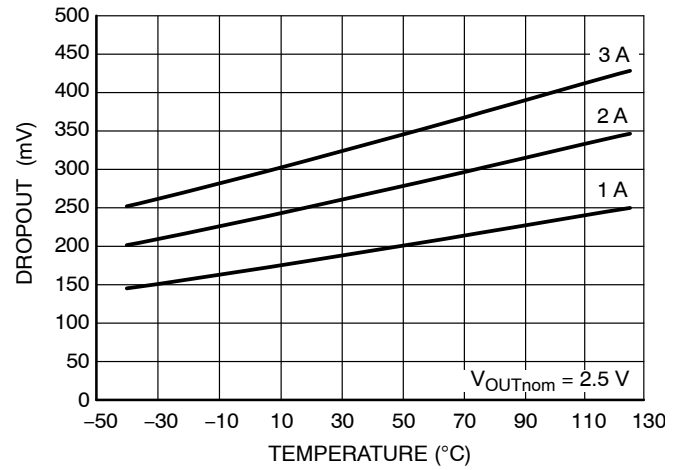


Figure 5. Dropout Voltage vs. Temperature

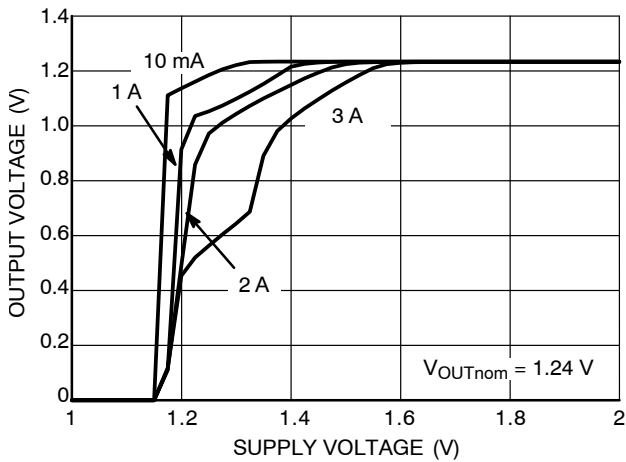


Figure 6. Dropout Characteristics

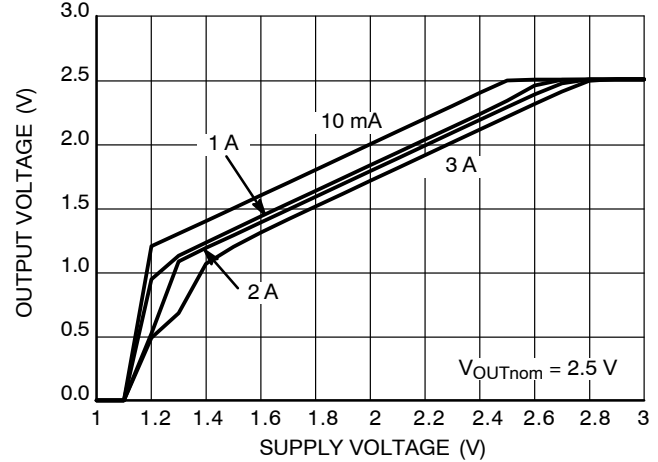


Figure 7. Dropout Characteristics

TYPICAL CHARACTERISTICS

$T_J = 25^\circ\text{C}$  if not otherwise noted

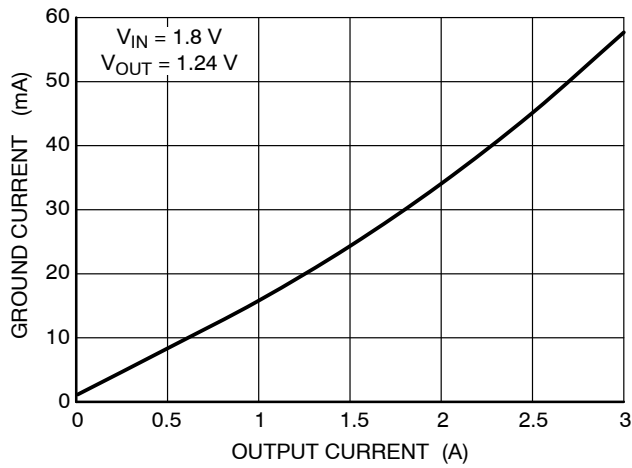


Figure 8. Ground Current vs. Output Current

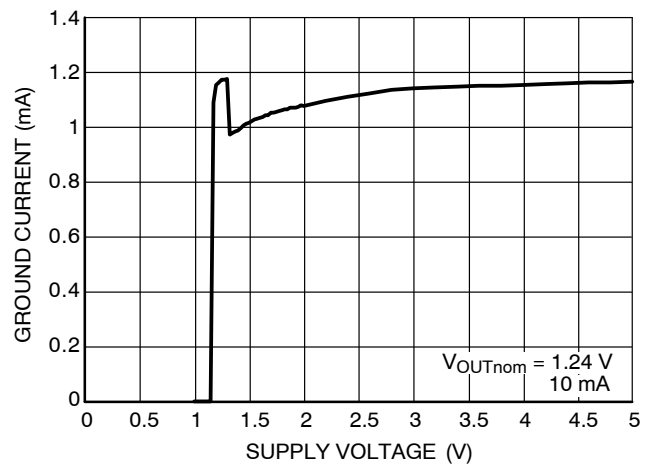


Figure 9. Ground Current vs. Supply Voltage

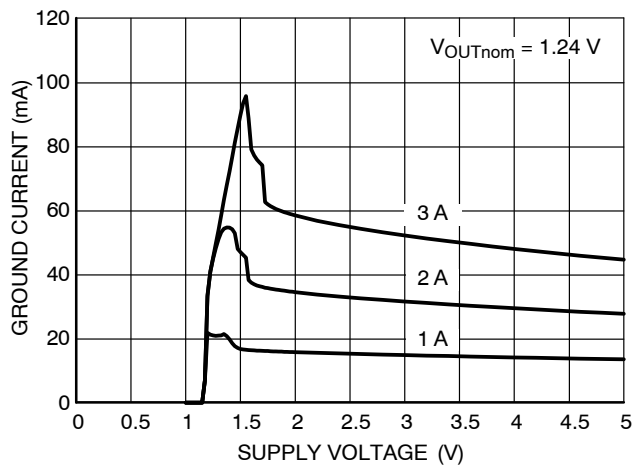


Figure 10. Ground Current vs. Supply Voltage

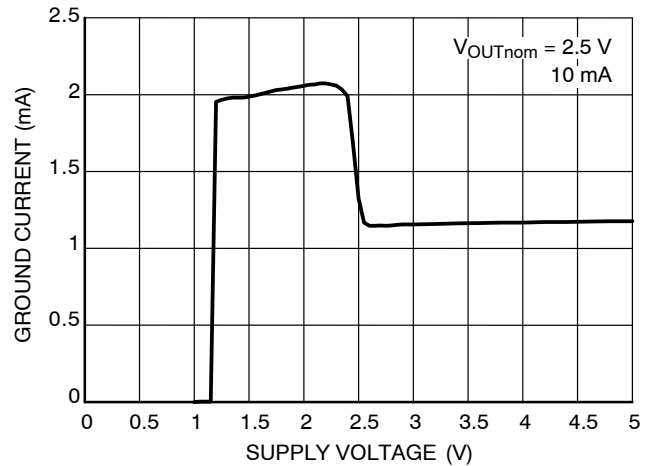


Figure 11. Ground Current vs. Supply Voltage

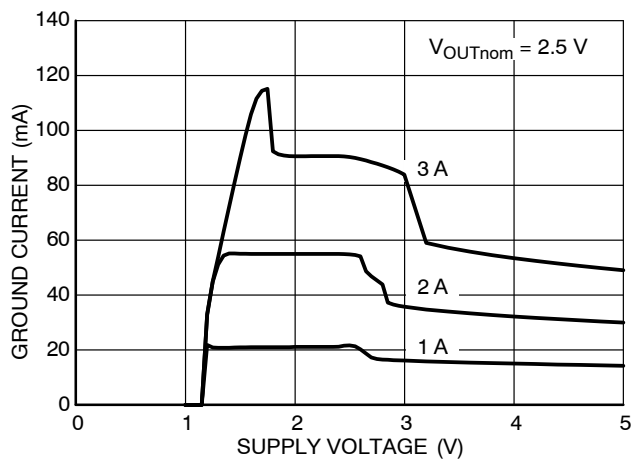


Figure 12. Ground Current vs. Supply Voltage

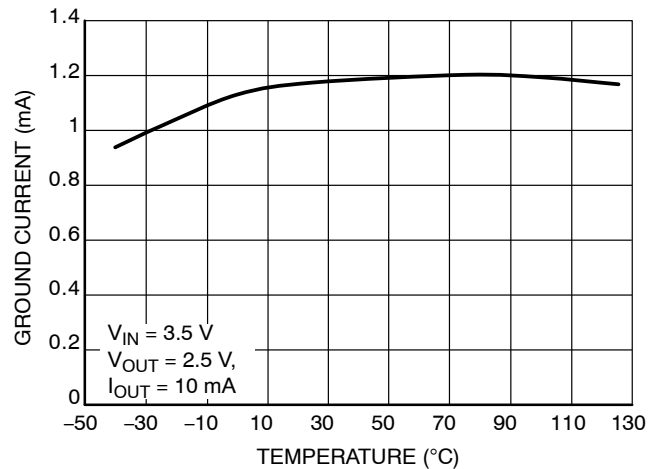


Figure 13. Ground Current vs. Temperature

TYPICAL CHARACTERISTICS

$T_J = 25^\circ\text{C}$  if not otherwise noted

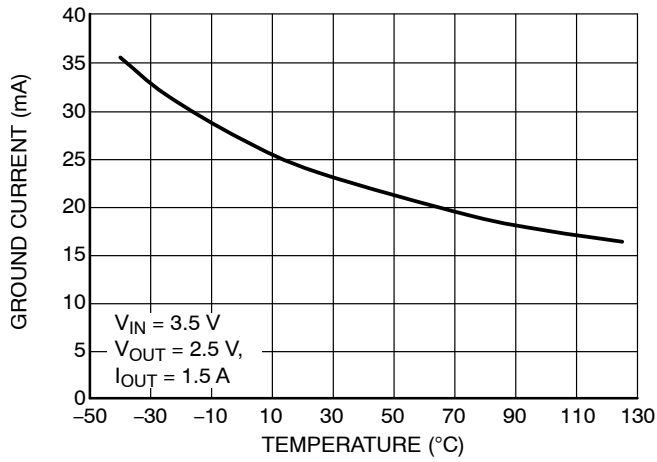


Figure 14. Ground Current vs. Temperature

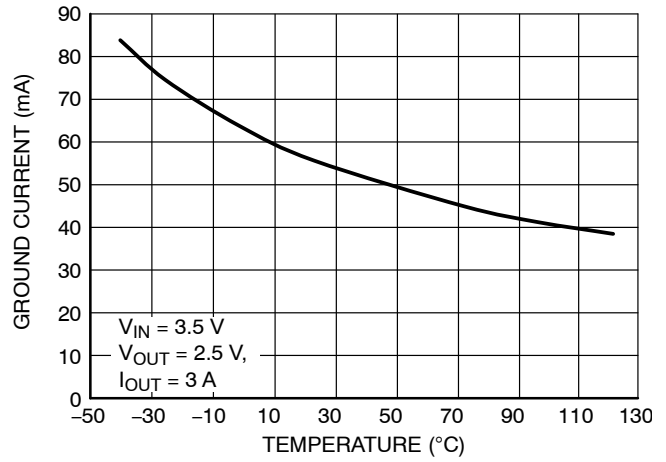


Figure 15. Ground Current vs. Temperature

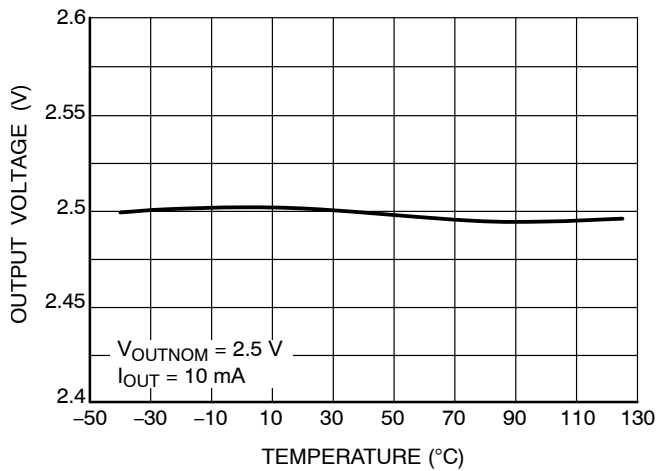


Figure 16. Output Voltage vs. Temperature

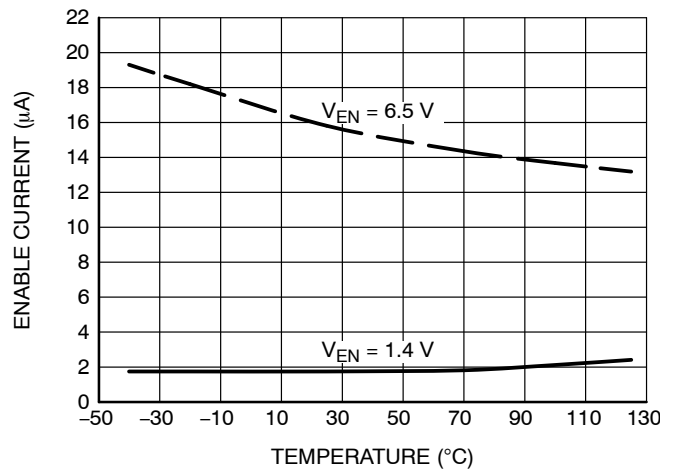


Figure 17. Enable Pin Input Current vs. Temperature

# NCP57302, NCV57302

## FUNCTIONAL CHARACTERISTICS

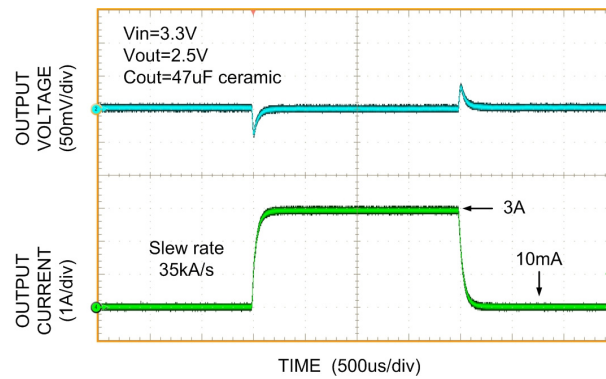


Figure 18. Load Transient Response

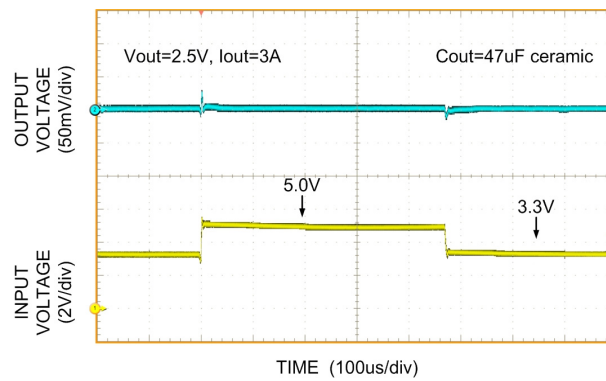


Figure 19. Line Transient Response

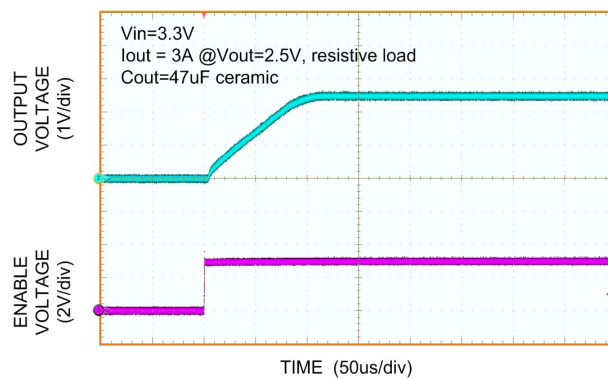


Figure 20. Enable Transient Response

## APPLICATIONS INFORMATION

### Output Capacitor and Stability

The NCP57302 device requires an output capacitor for stable operation. The NCP57302 is designed to operate with ceramic output capacitors. The recommended output capacitance value is 47  $\mu\text{F}$  or greater. Such capacitors help to improve transient response and noise reduction at high frequency.

### Input Capacitor

An input capacitor of 1.0  $\mu\text{F}$  or greater is recommended when the device is more than 4 inches away from the bulk supply capacitance, or when the supply is a battery. Small, surface-mount chip capacitors can be used for the bypassing. The capacitor should be placed within 1 inch of the device for optimal performance. Larger values will help to improve ripple rejection by bypassing the input of the regulator, further improving the integrity of the output voltage.

### Minimum Load Current

The NCP57302 regulator is specified between finite loads. A 10 mA minimum load current is necessary for proper operation.

### Enable Input

NCP57302 regulators also feature an enable input for on/off control of the device. Its shutdown state draws “zero” current from input voltage supply (only microamperes of leakage). The enable input is TTL/CMOS compatible for simple logic interface, but can be connected up to  $V_{\text{IN}}$ .

### Overcurrent and Reverse Output Current Protection

The NCP57302 regulator is fully protected from damage due to output current overload and output short conditions. When NCP57302 output is overloaded, Output Current limiting is provided. This limiting is linear; output current during overload or output short conditions is constant. These features are advantageous for powering FPGAs and other ICs having current consumption higher than nominal during their startup.

Thermal shutdown disables the NCP57302 device when the die temperature exceeds the maximum safe operating temperature.

When NCP57302 is disabled and ( $V_{\text{OUT}} - V_{\text{IN}}$ ) voltage difference is less than 6.5 V in the application, the output structure of these regulators is able to withstand output voltage (backup battery as example) to be applied without reverse current flow.

### Adjustable Voltage Design

The NCP/NCV57302 Adjustable voltage Device Output voltage is set by the ratio of two external resistors as shown in Figure 21.

The device maintains the voltage at the ADJ pin at 1.24 V referenced to ground. The current in R2 is then equal to  $1.24 \text{ V} / R_2$ , and the current in R1 is the current in R2 plus the ADJ pin bias current. The ADJ pin bias current flows from  $V_{\text{OUT}}$  through R1 into the ADJ pin.

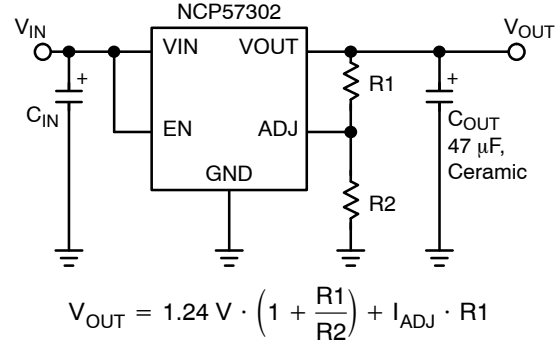


Figure 21. Adjustable Voltage Operation

For the R2 resistor value up to 15 k $\Omega$  the  $I_{\text{ADJ}}$  current impact can be neglected and the R1 resistor value can be calculated y:

$$R_1 = R_2 \times \left(\frac{V_{\text{OUT}}}{1.24} - 1\right) \quad (\text{eq. 1})$$

Where  $V_{\text{OUT}}$  is the desired nominal output voltage.

### Thermal Considerations

The power handling capability of the device is limited by the maximum rated junction temperature (125°C). The  $P_{\text{D}}$  total power dissipated by the device has two components, Input to output voltage differential multiplied by Output current and Input voltage multiplied by GND pin current.

$$P_{\text{D}} = (V_{\text{IN}} - V_{\text{OUT}}) \cdot I_{\text{OUT}} + V_{\text{IN}} \cdot I_{\text{GND}} \quad (\text{eq. 2})$$

The GND pin current value can be found in Electrical Characteristics table and in Typical Characteristics graphs.

The Junction temperature  $T_{\text{J}}$  is

$$T_{\text{J}} = T_{\text{A}} + P_{\text{D}} \cdot R_{\theta\text{JA}} \quad (\text{eq. 3})$$

where  $T_{\text{A}}$  is ambient temperature and  $R_{\theta\text{JA}}$  is the Junction to Ambient Thermal Resistance of the NCP/NCV57302 device mounted on the specific PCB.

To maximize efficiency of the application and minimize thermal power dissipation of the device it is convenient to use the Input to output voltage differential as low as possible.

The static typical dropout characteristics for various output voltage and output current can be found in the Typical Characteristics graphs.

## NCP57302, NCV57302

### ORDERING INFORMATION

| Device            | Output Current | Output Voltage | Junction Temp. Range | Package              | Shipping <sup>†</sup> |
|-------------------|----------------|----------------|----------------------|----------------------|-----------------------|
| NCP57302DSADJR4G  | 3.0 A          | ADJ            | –40°C to +125°C      | D2PAK–5<br>(Pb–Free) | 800 / Tape & Reel     |
| NCV57302DSADJR4G* | 3.0 A          | ADJ            | –40°C to +125°C      | D2PAK–5<br>(Pb–Free) | 800 / Tape & Reel     |


<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q100 Qualified and PPAP Capable.

# NCP57302, NCV57302

## PACKAGE DIMENSIONS

### D<sup>2</sup>PAK 5 CASE 936A-02 ISSUE C

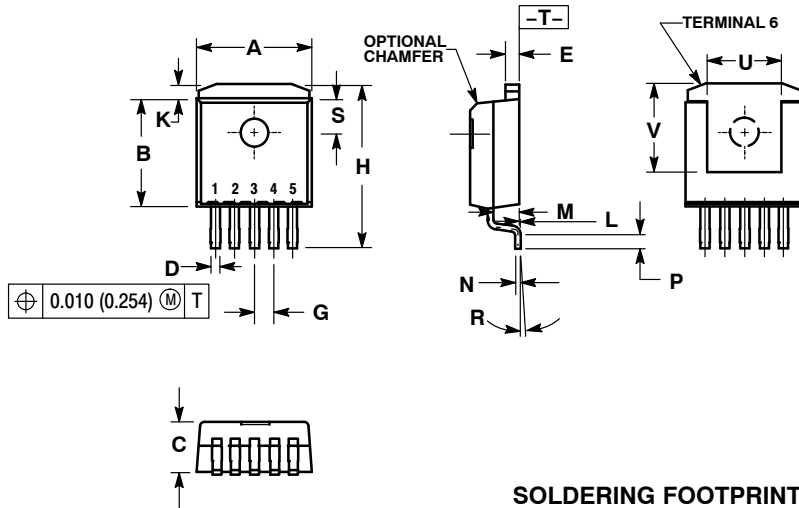


#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. TAB CONTOUR OPTIONAL WITHIN DIMENSIONS A AND K.
4. DIMENSIONS U AND V ESTABLISH A MINIMUM MOUNTING SURFACE FOR TERMINAL 6.
5. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH OR GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.025 (0.635) MAXIMUM.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 0.386     | 0.403 | 9.804       | 10.236 |
| B   | 0.356     | 0.368 | 9.042       | 9.347  |
| C   | 0.170     | 0.180 | 4.318       | 4.572  |
| D   | 0.026     | 0.036 | 0.660       | 0.914  |
| E   | 0.045     | 0.055 | 1.143       | 1.397  |
| G   | 0.067 BSC |       | 1.702 BSC   |        |
| H   | 0.539     | 0.579 | 13.691      | 14.707 |
| K   | 0.050 REF |       | 1.270 REF   |        |
| L   | 0.000     | 0.010 | 0.000       | 0.254  |
| M   | 0.088     | 0.102 | 2.235       | 2.591  |
| N   | 0.018     | 0.026 | 0.457       | 0.660  |
| P   | 0.058     | 0.078 | 1.473       | 1.981  |
| R   | 5° REF    |       | 5° REF      |        |
| S   | 0.116 REF |       | 2.946 REF   |        |
| U   | 0.200 MIN |       | 5.080 MIN   |        |
| V   | 0.250 MIN |       | 6.350 MIN   |        |

#### SOLDERING FOOTPRINT

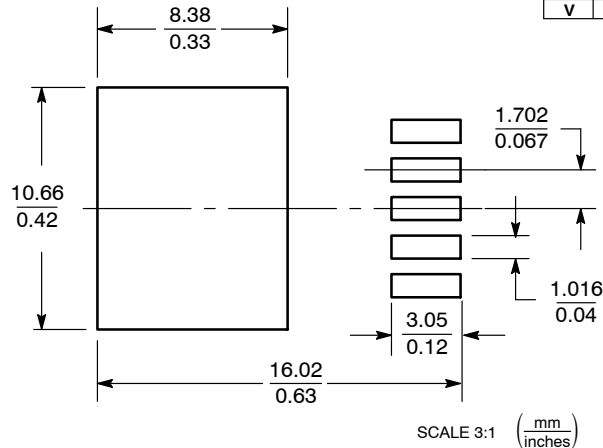

SCALE 3:1 (mm/inches)

### 5-LEAD D<sup>2</sup>PAK

**ON Semiconductor** and **ON** are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

##### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative