## **SIEMENS**

product brand name

Data sheet 3RW5516-1HA05

SIRIUS



SIRIUS soft starter 200-600 V 32 A, 24 V AC/DC Screw terminals

product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW55
manufacturer's article number	
<ul> <li>of high feature HMI module usable</li> </ul>	3RW5980-0HF00
<ul> <li>of communication module PROFINET standard usable</li> </ul>	3RW5980-0CS00
• of communication module PROFINET high-feature usable	3RW5950-0CH00
<ul> <li>of communication module PROFIBUS usable</li> </ul>	3RW5980-0CP00
<ul> <li>of communication module Modbus TCP usable</li> </ul>	3RW5980-0CT00
<ul> <li>of communication module Modbus RTU usable</li> </ul>	3RW5980-0CR00
<ul> <li>of communication module Ethernet/IP</li> </ul>	3RW5980-0CE00
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3RV2032-4VA10; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3RV2032-4VA10; Type of coordination 1, Iq = 10 kA, CLASS 10
• of circuit breaker usable at 400 V at inside-delta circuit	3RV2032-4JA10; Type of coordination 1, Iq = 65 kA, CLASS 10
• of circuit breaker usable at 500 V at inside-delta circuit	3RV2032-4JA10; Type of coordination 1, Iq = 10 kA, CLASS 10
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	3NA3824-6; Type of coordination 1, Iq = 65 kA
• of the gG fuse usable at inside-delta circuit up to 500 V	3NA3824-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE1818-0; Type of coordination 2, Iq = 65 kA
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE8022-1; Type of coordination 2, Iq = 65 kA
General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class	5 (based on IEC 61557-12)
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	Yes
3RW55161HA05	Subject to change without notice

• is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
buffering time in the event of power failure	
for main current circuit	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
between main and auxiliary circuit	600 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
recovery time after overload trip adjustable	60 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	02/15/2018
product function	
<ul><li>ramp-up (soft starting)</li></ul>	Yes
<ul><li>ramp-down (soft stop)</li></ul>	Yes
<ul><li>breakaway pulse</li></ul>	Yes
<ul> <li>adjustable current limitation</li> </ul>	Yes
<ul> <li>creep speed in both directions of rotation</li> </ul>	Yes
<ul><li>pump ramp down</li></ul>	Yes
DC braking	Yes
<ul> <li>motor heating</li> </ul>	Yes
<ul> <li>slave pointer function</li> </ul>	Yes
trace function	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
<ul> <li>evaluation of thermistor motor protection</li> </ul>	Yes; Type A PTC or Klixon / Thermoclick
• inside-delta circuit	Yes
• auto-RESET	Yes
manual RESET	Yes
• remote reset	Yes
• communication function	Yes
operating measured value display	Yes
• event list	Yes
• error logbook	Yes
via software parameterizable	Yes
via software configurable	Yes
screw terminal	Yes
spring-loaded terminal	No
PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules
firmware update	Yes
<ul> <li>removable terminal for control circuit</li> </ul>	Yes
<ul> <li>voltage ramp</li> </ul>	Yes
• torque control	Yes
<ul> <li>combined braking</li> </ul>	Yes
analog output	Yes; 4 20 mA (default) / 0 10 V
<ul> <li>programmable control inputs/outputs</li> </ul>	Yes
<ul> <li>condition monitoring</li> </ul>	Yes

<ul> <li>automatic parameterisation</li> </ul>	Yes
<ul> <li>application wizards</li> </ul>	Yes
<ul> <li>alternative run-down</li> </ul>	Yes
<ul> <li>emergency operation mode</li> </ul>	Yes
<ul> <li>reversing operation</li> </ul>	Yes
soft starting at heavy starting conditions	Yes
Power Electronics	
operational current	
<ul> <li>at 40 °C rated value</li> </ul>	32 A
<ul> <li>at 40 °C rated value minimum</li> </ul>	6.5 A
<ul> <li>at 50 °C rated value</li> </ul>	28.4 A
at 60 °C rated value	26 A
operational current at inside-delta circuit	
• at 40 °C rated value	55.4 A
<ul> <li>at 50 °C rated value</li> </ul>	49 A
at 60 °C rated value	45 A
operating voltage	
• rated value	200 600 V
at inside-delta circuit rated value	200 600 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %
relative positive tolerance of the operating voltage at inside-delta circuit	10 %
operating power for 3-phase motors	
• at 230 V at 40 °C rated value	7.5 kW
• at 230 V at inside-delta circuit at 40 °C rated value	15 kW
• at 400 V at 40 °C rated value	15 kW
• at 400 V at inside-delta circuit at 40 °C rated value	22 kW
• at 500 V at 40 °C rated value	18.5 kW
• at 500 V at inside-delta circuit at 40 °C rated value	30 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
minimum load [%]	10 %; Relative to set le
power loss [W] for rated value of the current at AC	
• at 40 °C after startup	10 W
• at 50 °C after startup	9 W
at 60 °C after startup	8 W
power loss [W] at AC at current limitation 350 %	
<ul> <li>at 40 °C during startup</li> </ul>	519 W
• at 50 °C during startup	437 W
at 60 °C during startup	386 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
• at 50 Hz rated value	24 V
at 60 Hz rated value	24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage	10 %

	quick-acting fuse (Icu=1 kA), C1 miniature circuit iniature circuit breaker (Icu= 300 A); Is not part of
• at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  10.91 A  7.5 A  20 ms  7.5 A  20 ms  4 A gG fuse (Icu=1 kA), 6 A  breaker (Icu=600 A), C6 m  scope of supply  Inputs/ Outputs  number of digital inputs  • parameterizable  • number of digital outputs  number of digital outputs parameterizable	
relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value 420 mA  holding current in bypass operation rated value 820 mA  inrush current by closing the bypass contacts maximum 0.91 A  inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection Varistor  design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A breaker (Icu=600 A), C6 m scope of supply  Inputs/ Outputs  number of digital inputs 4  • number of digital outputs 4  • number of digital outputs parameterizable 3	
relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value 420 mA  holding current in bypass operation rated value 820 mA  inrush current by closing the bypass contacts maximum 0.91 A  inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection Varistor  design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A breaker (Icu=600 A), C6 m scope of supply  Inputs/ Outputs  number of digital inputs 4  • number of digital outputs 4  • number of digital outputs parameterizable 3	
control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  Inputs/ Outputs  number of digital inputs  • parameterizable  • number of digital outputs parameterizable  420 mA  820 mA  7.5 A  7.5 A  7.5 A  4 A gG fuse (Icu= 1 kA), 6 A  breaker (Icu= 600 A), C6 m  scope of supply  4  • number of digital inputs  • number of digital outputs  • number of digital outputs parameterizable	
holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  Inputs/ Outputs  number of digital inputs  • number of digital outputs  number of digital outputs parameterizable  9 number of digital outputs parameterizable  820 mA  0.91 A  7.5 A  7.5 A  20 ms  Varistor  4 A gG fuse (Icu=1 kA), 6 A  breaker (Icu=600 A), C6 m  scope of supply	
inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A breaker (Icu=600 A), C6 m scope of supply  Inputs/ Outputs  number of digital inputs  • parameterizable  • number of digital outputs  • number of digital outputs parameterizable  3	
inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A breaker (Icu=600 A), C6 m scope of supply  Inputs/ Outputs  number of digital inputs  • parameterizable  • number of digital outputs  number of digital outputs parameterizable  3	
maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  Inputs/ Outputs  number of digital inputs  • number of digital outputs  number of digital outputs parameterizable  varistor  4 A gG fuse (Icu=1 kA), 6 A breaker (Icu= 600 A), C6 m scope of supply  Inputs/ Outputs  4  • number of digital inputs  • number of digital outputs  • number of digital outputs  • number of digital outputs parameterizable	
voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  4 A gG fuse (Icu=1 kA), 6 A breaker (Icu= 600 A), C6 m scope of supply  Inputs/ Outputs  number of digital inputs  • parameterizable  • number of digital outputs  • number of digital outputs parameterizable  3	
design of short-circuit protection for control circuit  4 A gG fuse (Icu= 1 kA), 6 A breaker (Icu= 600 A), C6 m scope of supply  Inputs/ Outputs  number of digital inputs  • parameterizable  • number of digital outputs  • number of digital outputs parameterizable  3	
breaker (Icu= 600 A), C6 m scope of supply  Inputs/ Outputs  number of digital inputs  • parameterizable  • number of digital outputs  • number of digital outputs  • number of digital outputs parameterizable  3	
number of digital inputs  • parameterizable  • number of digital outputs  • number of digital outputs parameterizable  3	
<ul> <li>parameterizable</li> <li>number of digital outputs</li> <li>number of digital outputs parameterizable</li> </ul>	
<ul> <li>number of digital outputs</li> <li>number of digital outputs parameterizable</li> <li>3</li> </ul>	
<ul> <li>number of digital outputs</li> <li>number of digital outputs parameterizable</li> <li>3</li> </ul>	
• number of digital outputs parameterizable 3	
• number of digital outputs parameterizable 3	
· · ·	
digital output version 3 normally-open contacts (I	NO) / 1 changeover contact (CO)
number of analog outputs 1	, ,
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value 3 A	
at DC-13 at 24 V rated value     1 A	
Installation/ mounting/ dimensions	
	90° and tilted forward or backward +/- 22.5°)
fastening method screw fixing	of and inted forward of backward in 22.0 )
height 275 mm	
width 170 mm	
depth 152 mm	
required spacing with side-by-side mounting	
• forwards 10 mm	
backwards     0 mm	
• upwards 100 mm	
• downwards 75 mm	
weight without packaging 2.6 kg  Connections/ Terminals	
type of electrical connection	
• for main current circuit screw-type terminals	
• for control circuit screw-type terminals	
wire length for thermistor connection	
• with conductor cross-section = 0.5 mm² maximum 50 m	
• with conductor cross-section = 1.5 mm² maximum 150 m	
• with conductor cross-section = 2.5 mm² maximum 250 m	
type of connectable conductor cross-sections	
• for main contacts	
— solid 2x (1.0 2.5 mm²), 2x (2.5	
— finely stranded with core end processing 2x (1.0 2.5 mm²), 2x (2.5	6.0 mm²)
• for AWG cables for main current circuit solid 2x (16 12), 2x (14 8)	
type of connectable conductor cross-sections	
• for control circuit solid 1x (0.5 4.0 mm²), 2x (0.5	
• for control circuit finely stranded with core end processing 1x (0.5 2.5 mm²), 2x (0.5	1.5 mm²)
• for AWG cables for control circuit solid 1x (20 12), 2x (20 14)	
wire length	
• between soft starter and motor maximum 800 m	

at the digital inputs at DC maximum	1 000 m
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-25 +80 °C
environmental category	
<ul> <li>during operation according to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
<ul> <li>during storage according to IEC 60721</li> </ul>	1 K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), $1 M4$
during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
PROFINET standard	Yes
PROFINET high-feature	No
EtherNet/IP	No
Modbus RTU	No
Modbus TCP	Yes
• PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
of circuit breaker	
<ul> <li>usable for Standard Faults at 460/480 V according to UL</li> </ul>	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; Iq = 5 kA
<ul> <li>usable for High Faults at 460/480 V according to UL</li> </ul>	Siemens type: 3RV2742, max.40 A or 3VA51, max. 60 A; lq max = 65 kA
<ul> <li>usable for Standard Faults at 460/480 V at inside- delta circuit according to UL</li> </ul>	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; Iq = 5 kA
<ul> <li>usable for High Faults at 460/480 V at inside-delta circuit according to UL</li> </ul>	Siemens type: 3VA51, max. 60 A; lq max = 65 kA
<ul> <li>usable for Standard Faults at 575/600 V according to UL</li> </ul>	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; lq = 5 kA
<ul> <li>usable for High Faults at 575/600 V at inside-delta circuit according to UL</li> </ul>	Siemens type: 3VA51, max. 60 A; lq max = 65 kA
<ul> <li>usable for Standard Faults at 575/600 V at inside- delta circuit according to UL</li> </ul>	Siemens type: 3RV2742, max. 70 A or 3VA51, max. 100 A; lq = 5 kA
of the fuse	
— usable for Standard Faults up to 575/600 V     according to UL	Type: Class RK5 / K5, max. 125 A; lq = 5 kA
— usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 125 A; Iq = 100 kA
usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class RK5 / K5, max. 125 A; Iq = 5 kA
— usable for High Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class J / L, max. 125 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
• at 200/208 V at 50 °C rated value	7.5 hp
• at 220/230 V at 50 °C rated value	10 hp
<ul> <li>at 460/480 V at 50 °C rated value</li> </ul>	20 hp
• at 575/600 V at 50 °C rated value	25 hp
• at 200/208 V at inside-delta circuit at 50 °C rated value	15 hp
at 220/230 V at inside-delta circuit at 50 °C rated value	15 hp
• at 460/480 V at inside-delta circuit at 50 °C rated value	30 hp
at 575/600 V at inside-delta circuit at 50 °C rated value	40 hp
contact rating of auxiliary contacts according to UL	R300-B300
Safety related data	IDOO
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
electromagnetic compatibility	acc. to IEC 60947-4-2
ATEX	
certificate of suitability	
• ATEX	Yes
• IECEx	Yes

<ul> <li>according to ATEX directive 2014/34/EU</li> </ul>	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]
hardware fault tolerance according to IEC 61508 relating to ATEX	0
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1

Certificates/ approvals

**General Product Approval** 

**EMC** 





Confirmation







For use in hazardous locations

Declaration of Conformity

**Test Certificates** 

Marine / Shipping







Type Test Certificates/Test Report





Marine / Shipping

other





Confirmation

## **Further information**

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5516-1HA05

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5516-1HA05

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5516-1HA05

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5516-1HA05&lang=en

Characteristic: Tripping characteristics,  $I^2t$ , Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5516-1HA05/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5516-1HA05&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

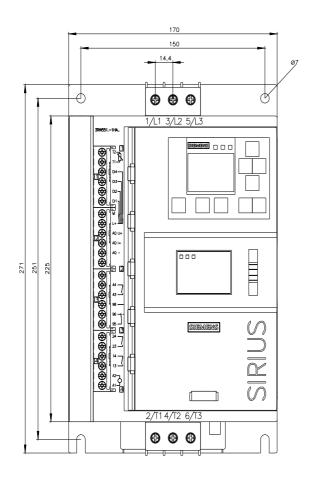

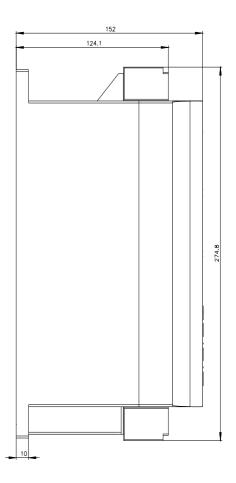

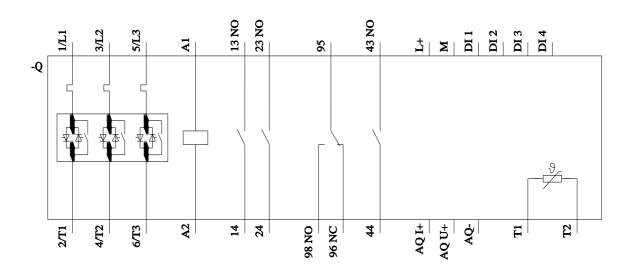

last modified: 8/24/2023 🖸

