

Components for safety applications


Safety limit switches

Double insulated, turret head (1), type XCS-TA

Cable entries tapped M16 x 1.5

References, characteristics

Type of switch	Without locking of operating key
----------------	----------------------------------




References of switches without operating key (⊖ N/C contact with positive opening operation)

3-pole N/C + N/O + N/O (2 N/O staggered) slow break (2)		XCS-TA592 ⊖
3-pole N/C + N/C + N/O (N/O staggered) slow break (2)		XCS-TA792 ⊖
3-pole N/C + N/C + N/C slow break (2)		XCS-TA892 ⊖
Weight (kg)	0.190	

Complementary characteristics not shown under general characteristics (page 6/16)

Actuation speed	Maximum : 0.5 m/s, minimum : 0.01 m/s
Resistance to forcible key withdrawal	10 N (50 N using operating keys XCS-Z12 or XCS-Z13 together with guard retaining device XCS-Z21)
Mechanical durability	> 1 million operating cycles
Maximum operating rate	For maximum durability : 600 operating cycles per hour
Minimum force for positive opening	15 N
Cable entry	2 tapped entries for M16 x 1.5 ISO cable gland. Clamping capacity 4 to 8 mm.

References of operating keys and guard retaining device

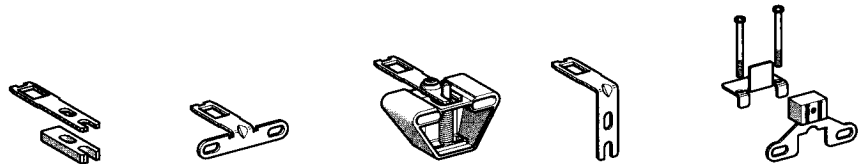

Description	Straight key	Wide key	Pivoting key	Right-angled key	Guard retaining device (3)
For limit switches XCS-TA	XCS-Z11	XCS-Z12	XCS-Z13	XCS-Z14	XCS-Z21
Weight (kg)	0.015	0.015	0.085	0.025	0.080

References of supplementary accessories

Description	Reference	Weight kg
Set of 10 blanking plugs for operating head slot	XCS-Z28	0.050

(1) 90° steps throughout 360°.

(2) Schematic diagrams shown represent the contact states whilst the operating key is inserted in the head of the switch.


(3) Only for use with operating keys XCS-Z12 and XCS-Z13.

Components for safety applications


Safety limit switches
 Double insulated, turret head, type XCS-TA
 Cable entries tapped M16 x 1.5

Dimensions, schemes

Dimensions XCS-TA●●●

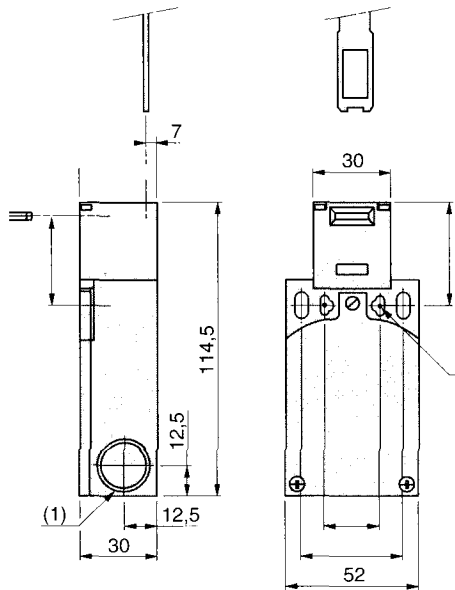


XCS-Z11

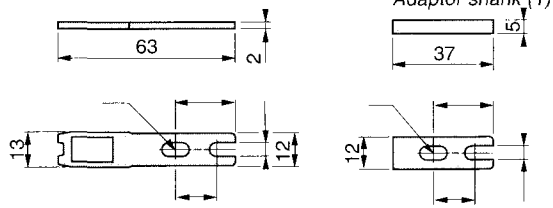


(1) Adaptor (supplied with operating key XCS-Z11) for replacing, without drilling additional fixing hole, an XCK-T safety limit switch with operating key XCK-Y01 by an XCS-TA safety limit switch with operating key XCS-Z11


XCS-Z12



XCS-Z13

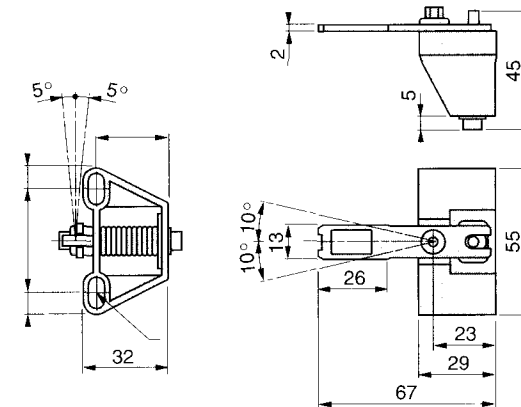


XCS-Z14




(1) 2 entries tapped M16 x 1.5 for ISO cable gland


Function diagrams XCS-TA592



XCS-TA792



XCS-TA892



Contact operation

