


Product description	<b>M12 Female panel mount connector, Contacts: 5, unshielded, screw clamp, IP67, UL 2238, VDE, M20x1.5, Front mounting, for the power supply</b>
Area	<b>M12-A</b>
Coding	<b>A-coded</b>
Series	<b>763</b>
Part no.	<b>99 0434 500 05</b>


### Illustration



### Scale drawing



### Contact arrangement (Plug-in side)



You can find the assembly instructions on the next page.

## Technical data

### General features

Part no.	<b>99 0434 500 05</b>
Notice	Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.
Connector design	Female panel mount connector
Type standard	DIN EN 61076-2-101
Coding	A-coded
Version	Connector socket straight
Connector locking system	screw
Termination	screw clamp
Degree of protection	IP67
Connection cross-section	max. 1.50 mm <sup>2</sup> / AWG 16
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	28.50
Customs tariff number	85369010
Country of Origin	DE

### Electrical parameters

Rated voltage	60 V (125 V UL)
Rated impulse voltage	1500 V
Rated current	contacts 1-4: 8 A / Contact 5: 2 A (2,0 A UL)
Insulation resistance	> 10 <sup>8</sup> Ω

Product description	<b>M12 Female panel mount connector, Contacts: 5, unshielded, screw clamp, IP67, UL 2238, VDE, M20x1.5, Front mounting, for the power supply</b>
Area	<b>M12-A</b>
Coding	<b>A-coded</b>
Series	<b>763</b>
Part no.	<b>99 0434 500 05</b>

Pollution degree	3
Overvoltage category	II
Insulating material group	III
EMC compliance	unshielded

### Material

Housing material	Zinc die-cast nickel-plated
Contact body material	PA black
Contact material	CuZn (brass)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	9233a7a1-278e-435f-8ed3-adfbff7466ca

### Authorization/approvals


Approvals	UL 2238, VDE
-----------	--------------

### Classifications

eCl@ss 11.1	27-44-01-09
ETIM 9.0	EC003569


### Assembly instructions

1. Bead hexagonal nut and pre-assembled panel mount connector housing to cable (consisting of: assembled panel mount connector housing, insulating sleeve and o-ring).
2. Dismantle cable.
3. Strip and screw on single wires:  
4, 5 pole: 0.4 Nm, 8 pole: 0.2 Nm.
4. Screw panel mount connector housing to male/female insert.
5. Tighten panel mount connector housing at the mounting cut-out with hexagonal nut.

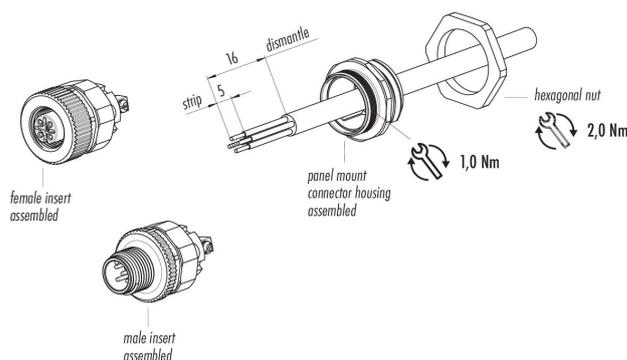

Product description	<b>M12 Female panel mount connector, Contacts: 5, unshielded, screw clamp, IP67, UL 2238, VDE, M20x1.5, Front mounting, for the power supply</b>
Area	<b>M12-A</b>
Coding	<b>A-coded</b>
Series	<b>763</b>
Part no.	<b>99 0434 500 05</b>

### Assembly instructions / Panel cut-out

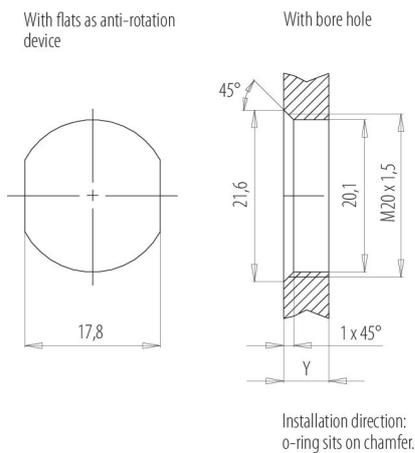

#### Tightening moment

Metall housing	2,00 Nm
Plastic housing	1,25 Nm

Thickness of wall Y (mm)		
Version	min (mm)	max (mm)
Fastened from rear	2	3,5
Front fastened	2	4,5
positioning possible <sup>1)</sup>	2	3,5
Screw clamp	2	3,5
Thread M12 x 1	2	3,0
Thread M14 x 1 <sup>2)</sup>	<b>3</b> <sup>1)</sup> 1,5/ <sup>4)</sup> 2	6,5

#### Notes

- <sup>1)</sup> Do not attach a chamfer
- <sup>2)</sup> Wall thickness:  
use nut 38 5385 100 001 to 1,5 mm,  
> 1,5 mm cut thread
- <sup>3)</sup> Nut
- <sup>4)</sup> Thread in wall of housing

Product description	<b>M12 Female panel mount connector, Contacts: 5, unshielded, screw clamp, IP67, UL 2238, VDE, M20x1.5, Front mounting, for the power supply</b>
Area	<b>M12-A</b>
Coding	<b>A-coded</b>
Series	<b>763</b>
Part no.	<b>99 0434 500 05</b>

## General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).

The user must take appropriate safety precautions to ensure that the connector cannot be accidentally disconnected. In addition, the user must ensure that the cable is suitably secured.